NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9267–0002 & P/N: 0344
   BODY & FITTINGS: NICKEL PLATED BRASS
   CONTACT: GOLD PLATED BRASS.
   DIELECTRIC: PTFE
   SPRING: NICKEL PLATED SK5
   SPRING: RED RUBBER
   WASHER: COPPER, TIN, NICKEL PLATED CSR

2. P/N: 0482 & P/N: 0148/0 & P/N: 0581
   HOUSING: BLK MOLDED DELRIN
   CONTACT: GOLD PLATED BeCu
   HEAT SHRINK: BLK HEAT SHRINK

3. P/N: XHBLK
   HOUSING: BLK MOLDED NYLON.
   CONTACT: NICKEL SILVER ALLOY.
   SPRING: STAINLESS STEEL

4. P/N: XHLRED
   HOUSING: RED MOLDED NYLON.
   CONTACT: NICKEL SILVER ALLOY.
   SPRING: STAINLESS STEEL

5. P/N: W–600/0
   18AWG TINNED COPPER STRANDING
   0.144 [3.66] O.D. PVC INSULATION

6. P/N: W–600/2
   18AWG TINNED COPPER STRANDING
   0.144 [3.66] O.D. PVC INSULATION

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED



WIRING SCHEMATIC

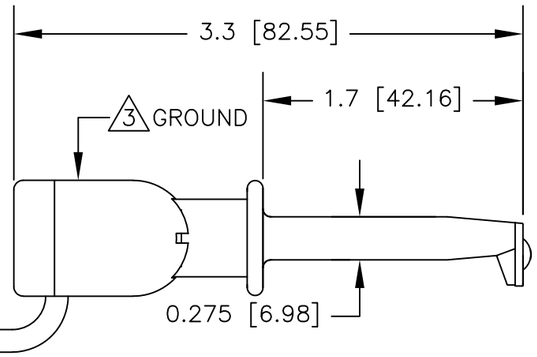

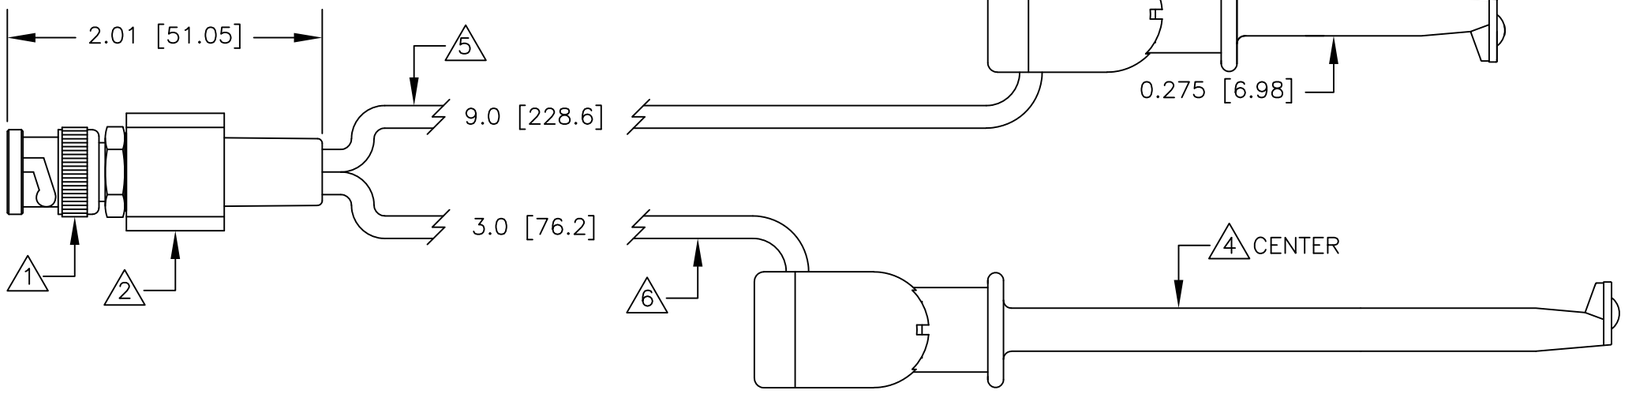

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.	E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS / DRAWN R.L.	DATE 4/19
		MATERIAL SEE NOTE.	APPROVED BY	
		FINISH SEE NOTE.		
NEXT ASSY	USED ON			
APPLICATION		DO NOT SCALE DRAWING		

DESCRIPTION: BNC MALE BREAKOUT TO 18AWG XH/XHL MACROHOOK LEADS

SIZE	CODE IDENT NO.	DRAWING NO.	REV.
B	08505	1010XHL	

SCALE 1:1 SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.