

NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 9267-0002 & P/N: 0344  
 BODY & FITTINGS: NICKEL PLATED BRASS  
 CONTACT: GOLD PLATED BRASS.  
 DIELECTRIC: PTFE  
 SPRING: NICKEL PLATED SK5  
 SPRING: RED RUBBER  
 WASHER: COPPER, TIN, NICKEL PLATED CSR

- P/N: 0480 & P/N: 0148/0 & P/N: 0581  
 HOUSING: BLK MOLDED DELRIN  
 CONTACT: GOLD PLATED BeCu  
 HEAT SHRINK: BLK HEAT SHRINK



- P/N: XKBLK  
 HOUSING: BLK GLASS FILLED CELCON.  
 CONTACT: STAINLESS STEEL.  
 SPRING: STAINLESS STEEL.

- P/N: XKRED  
 HOUSING: RED GLASS FILLED CELCON.  
 CONTACT: STAINLESS STEEL.  
 SPRING: STAINLESS STEEL.

- P/N: W-500/0  
 20AWG TINNED COPPER STRANDING  
 0.080 [2.03] O.D. PVC INSULATION

- P/N: W-500/2  
 20AWG TINNED COPPER STRANDING  
 0.080 [2.03] O.D. PVC INSULATION

		REVISIONS	
LTR	DESCRIPTION	DATE	APPROVED

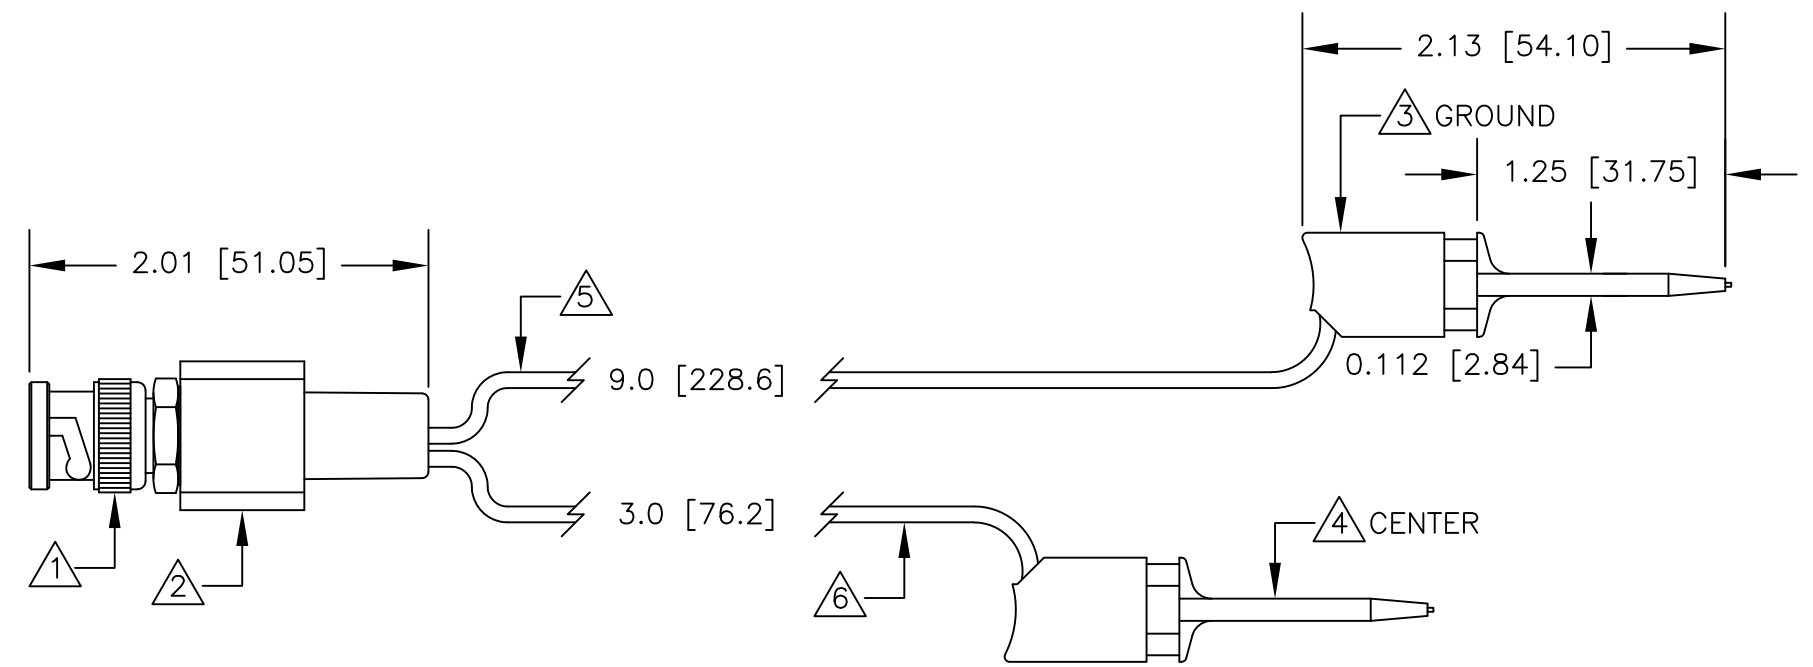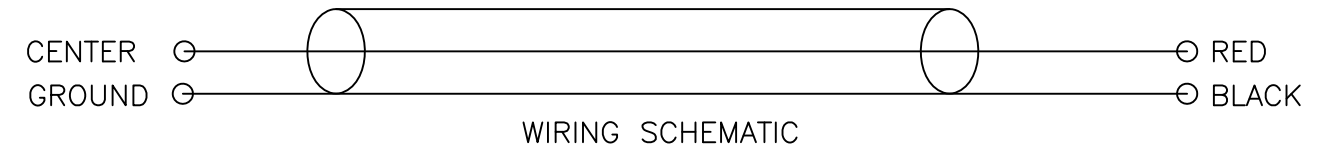

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	4/19	
			APPROVED BY			
		FINISH SEE NOTE.	DESCRIPTION			
			BNC MALE BREAKOUT TO XK DOUBLE GRIPPER LEADS			
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.	DRAWING NO.	
			<b>B</b>	<b>08505</b>	<b>1010XK</b>	
APPLICATION		DO NOT SCALE DRAWING	SCALE	1:1	SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.