NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9267-0002 & P/N: 0344
BODY & FITTINGS: NICKEL PLATED BRASS

CONTACT: GOLD PLATED BRASS.

DIELECTRIC: PTFE

SPRING: NICKEL PLATED SK5

SPRING: RED RUBBER

WASHER: COPPER, TIN, NICKEL PLATED CSR

2. P/N: 0480 & P/N: 0148/0 & P/N: 0581

HOUSING: BLK MOLDED DELRIN CONTACT: GOLD PLATED BeCu HEAT SHRINK: BLK HEAT SHRINK

3. P/N: 9259BLK

HOUSING: BLK MOLDED NYLON. FRAME: NICKEL PLATED BRASS

SPRING: SILVER PLATED BeCu OR PHOSPHOR BRONZE

4. P/N: 9259RED

HOUSING: RED MOLDED NYLON. FRAME: NICKEL PLATED BRASS


SPRING: SILVER PLATED BeCu OR PHOSPHOR BRONZE

5. P/N: W-500/0

20AWG TINNED COPPER STRANDING 0.080 [2.03] O.D. PVC INSULATION

6. P/N: W-500/2

20AWG TINNED COPPER STRANDING 0.080 [2.03] O.D. PVC INSULATION



WIRING SCHEMATIC


LTR

REVISIONS

DATE

APPROVED

DESCRIPTION

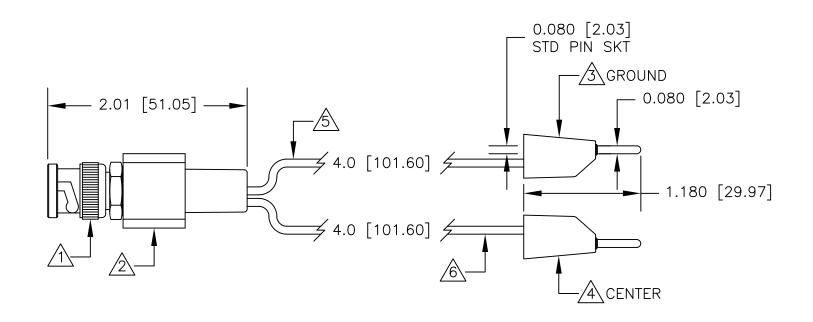

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.  APPROVALS DRAWN R.L.	DATE 4/19	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.  DESCRIPTION
		material -SEE NOTE.	APPROVED BY		BNC MALE BREAKOUT TO 4" 9259 STD STK PIN PLUG LEADS
		FINISH -SEE NOTE.			SIZE CODE IDENT NO. DRAWING NO. REV.
NEXT ASSY	USED ON	OLL MOTE.			<b>B</b>   <b>08505</b>   1013
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1