NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9267-0002 & P/N: 0344
BODY & FITTINGS: NICKEL PLATED BRASS
CONTACT: GOLD PLATED BRASS.

CONTACT: GOLD PL DIELECTRIC: PTFE

SPRING: NICKEL PLATED SK5

SPRING: RED RUBBER

WASHER: COPPER, TIN, NICKEL PLATED CSR

2. P/N: 0480 & P/N: 0148/0 & P/N: 0581

HOUSING: BLK MOLDED DELRIN CONTACT: GOLD PLATED BeCu HEAT SHRINK: BLK HEAT SHRINK

3. P/N: 9201BLK


HOUSING: BLK MOLDED NYLON. CONTACT: NICKEL PLATED BRASS


4. P/N: 9201RED


HOUSING: RED MOLDED NYLON. CONTACT: NICKEL PLATED BRASS

5. P/N: W-500/0 20AWG TINNED COPPER STRANDING 0.080 [2.03] O.D. PVC INSULATION

6. P/N: W-500/2 20AWG TINNED COPPER STRANDING 0.080 [2.03] O.D. PVC INSULATION

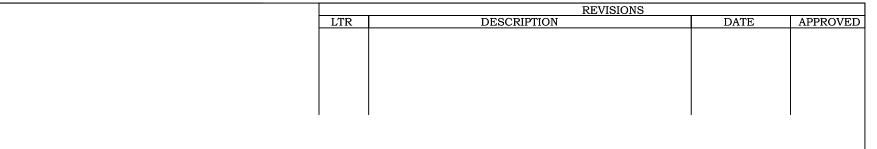



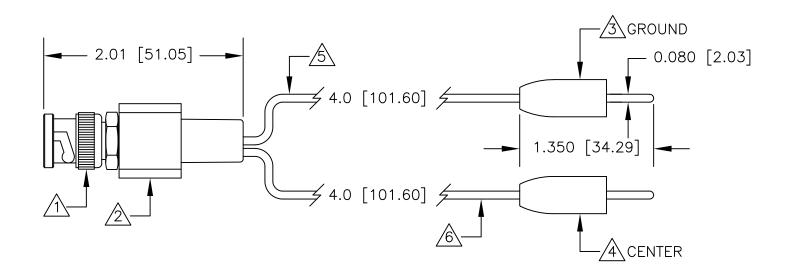

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO. APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
		± .XX ± ± .XXX ±	DRAWN R.L.	4/19	DESCRIPTION
		MATERIAL SEE NOTE.	APPROVED BY		BNC MALE BREAKOUT TO 4" 9201 STD PIN PLUG LEADS
		FINISH			SIZE CODE IDENT NO. DRAWING NO. REV.
NEXT ASSY	USED ON	SEE NOTE.			B 08505 1014
APPLICATION		DO NOT SCALE DRAWING			SCALÉ 1:1 SHEET 1 OF 1