
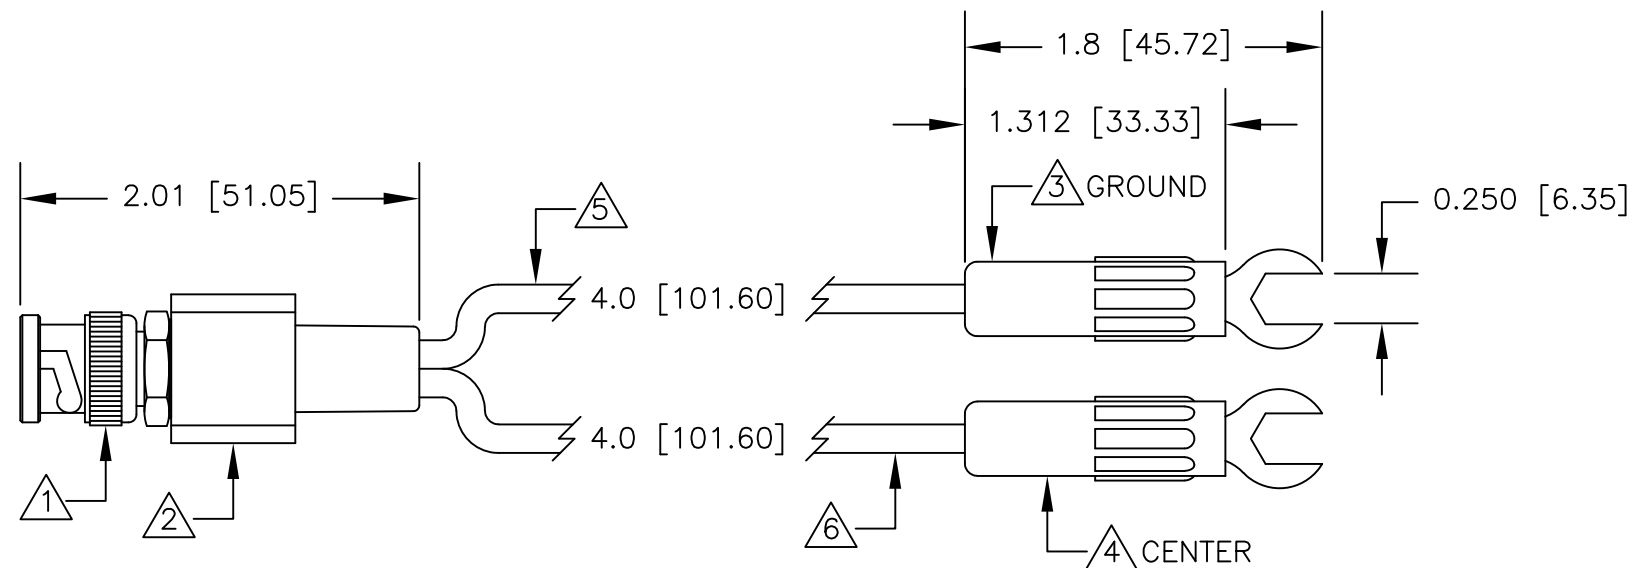


NOTES: UNLESS OTHERWISE SPECIFIED

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

1. P/N: 9267-0002 & P/N: 0344
BODY & FITTINGS: NICKEL PLATED BRASS
CONTACT: GOLD PLATED BRASS.
DIELECTRIC: PTFE
SPRING: NICKEL PLATED SK5
SPRING: RED RUBBER
WASHER: COPPER, TIN, NICKEL PLATED CSR
2. P/N: 0482 & P/N: 0148/0 & P/N: 0581
HOUSING: BLK MOLDED DELRIN
CONTACT: GOLD PLATED BeCu
HEAT SHRINK: BLK HEAT SHRINK
3. P/N: 9208BLK
HOUSING: BLK MOLDED ACETAL.
TERMINAL: NICKEL PLATED BRASS.
4. P/N: 9208RED
HOUSING: RED MOLDED ACETAL.
TERMINAL: NICKEL PLATED BRASS.
5. P/N: W-600/0
18AWG TINNED COPPER STRANDING
0.144 [3.66] O.D. PVC INSULATION
6. P/N: W-600/2
20AWG TINNED COPPER STRANDING
0.144 [3.66] O.D. PVC INSULATION

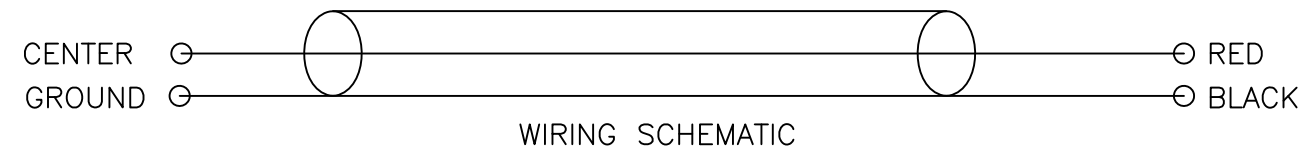

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div>E-Z-HOOK<div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div></div>					
			APPROVALS	DATE						
				DRAWN	R.L.	4/19	DESCRIPTION BNC MALE BREAKOUT TO 4” 9208 .250” SPADE LUG LEADS			
		MATERIAL SEE NOTE.	APPROVED BY							
		FINISH SEE NOTE.				SIZE	CODE IDENT NO.	DRAWING NO.	REV.	
NEXT ASSY	USED ON					B	08505	1017-25		
APPLICATION		DO NOT SCALE DRAWING				SCALE		1:1	SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.