NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9267-0002 & P/N: 0344

BODY & FITTINGS: NICKEL PLATED BRASS CONTACT: GOLD PLATED BRASS.

DIELECTRIC: PTFE

SPRING: NICKEL PLATED SK5

SPRING: RED RUBBER

WASHER: COPPER, TIN, NICKEL PLATED CSR

2. P/N: 0480 & P/N: 0148/0 & P/N: 0581

HOUSING: BLK MOLDED DELRIN CONTACT: GOLD PLATED BeCu HEAT SHRINK: BLK HEAT SHRINK

3. P/N: 0202

BODY: NICKEL UNDERPLATED BRASS.

CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.

GOLD FLASH BeCu SPRING.

4. P/N: 0148/0


INSULATOR: HEAT SHRINK TUBING. BLACK.

5. P/N: W-500/0

20AWG TINNED COPPER STRANDING 0.080 [2.03] O.D. PVC INSULATION

6. P/N: W-500/2

20AWG TINNED COPPER STRANDING 0.080 [2.03] O.D. PVC INSULATION




LTR

REVISIONS

DATE

APPROVED

DESCRIPTION

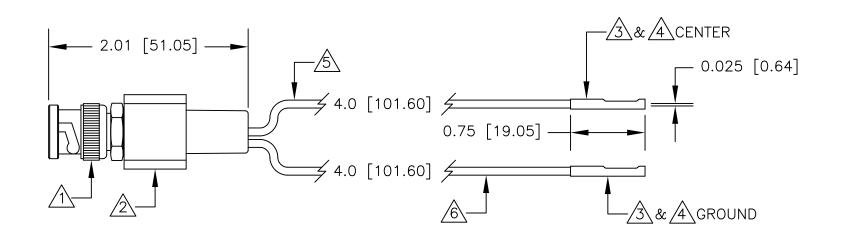

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO. APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
		± .XX ± ± .XXX ±	DRAWN R.L.	4/19	DESCRIPTION DESCRIPTION 4"
		MATERIAL SEE NOTE.	APPROVED BY		BNC MALE BREAKOUT TO 4" .025 SQ SKT LEADS
		FINISH			SIZE CODE IDENT NO. DRAWING NO. REV.
NEXT ASSY	USED ON	SEE NOTE.			B 08505 1018
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1