
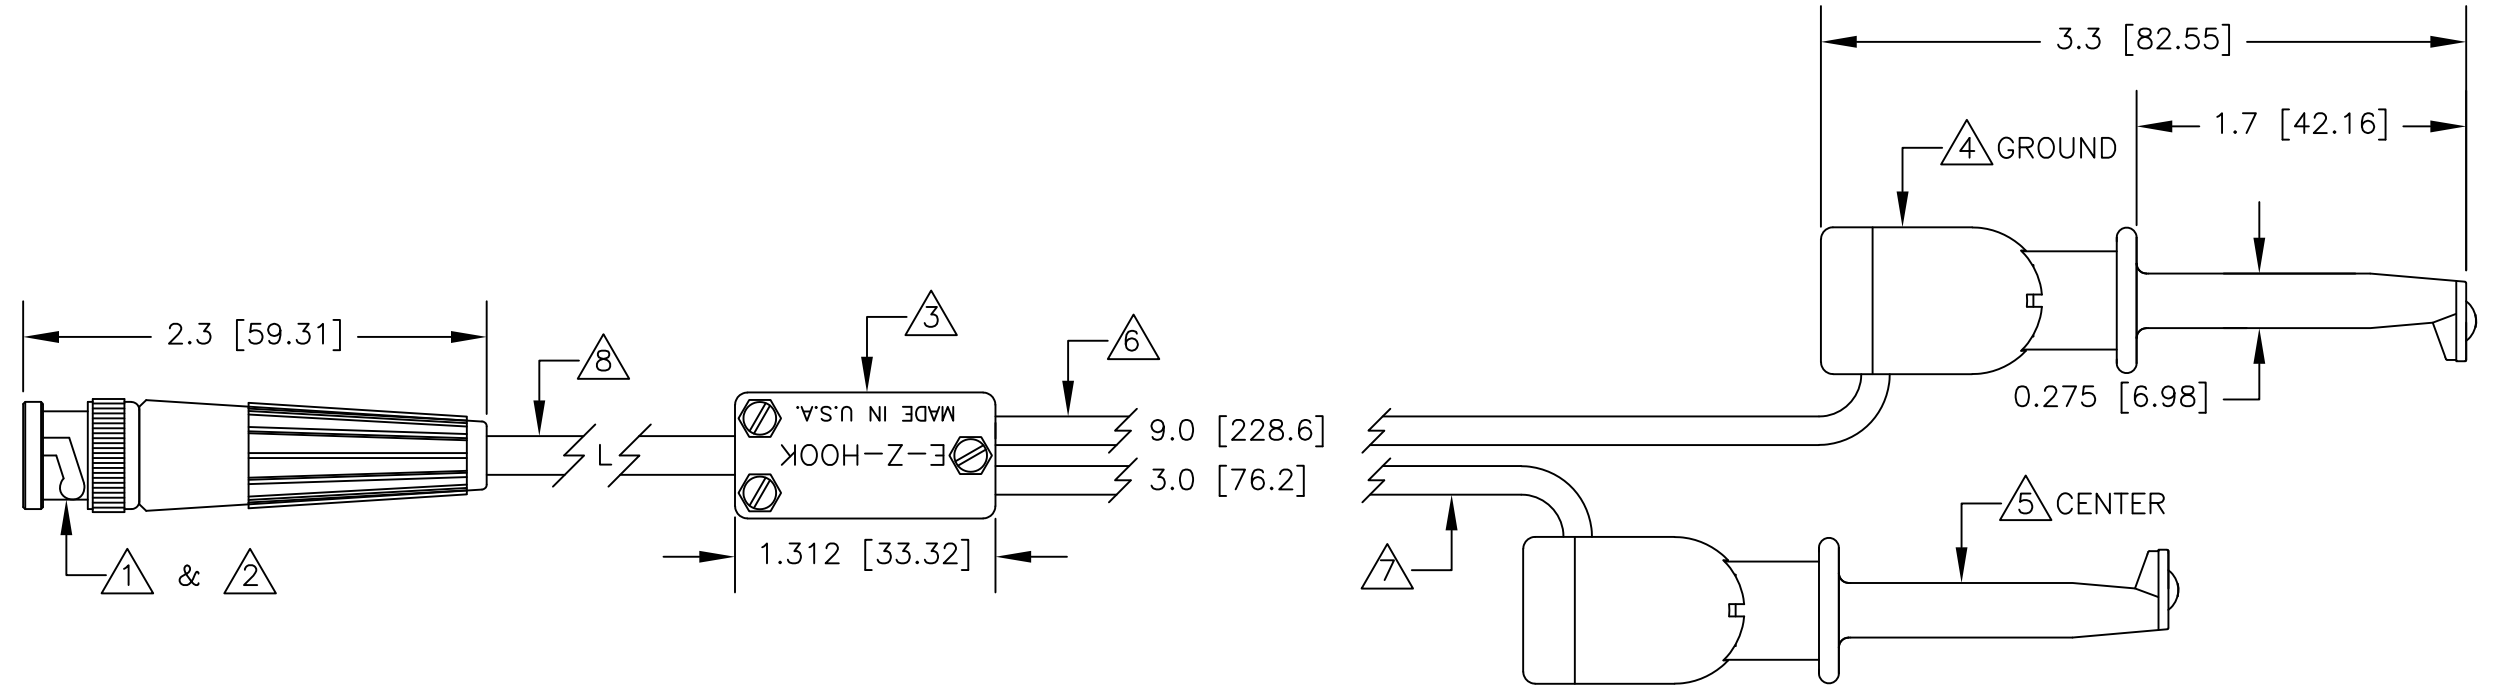


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901
BODY & FITTINGS: NICKEL PLATED BRASS
CONTACT: GOLD PLATED BRASS.
DIELECTRIC: PTFE
SPRING: NICKEL PLATED SK5
GASKET: RED RUBBER
2. P/N: SR58BLK
BOOT: BLK MOLDED PVC
3. P/N: Y-1000-2
HOUSING: BLK MOLDED NYLON
HARDWARE: SS SCREW, NUTS & WASHER
4. P/N: XHBLK
HOUSING: BLK MOLDED NYLON.
CONTACT: NICKEL SILVER ALLOY.
SPRING: STAINLESS STEEL.
5. P/N: XHRED
HOUSING: RED MOLDED NYLON.
CONTACT: NICKEL SILVER ALLOY.
SPRING: STAINLESS STEEL.
6. P/N: W-600/0
18AWG TINNED COPPER STRANDING
0.144 [3.66] O.D. PVC INSULATION
7. P/N: W-600/2
18AWG TINNED COPPER STRANDING
0.144 [3.66] O.D. PVC INSULATION
8. P/N: C-1000/0
20AWG RG58C/U CABLE
0.195 [4.95] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

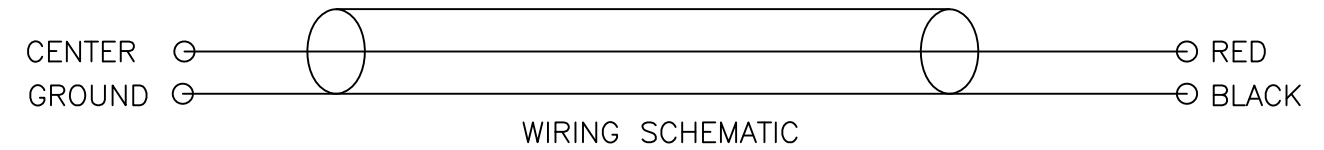

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE	DRAWN	R.L.	8/18
			FINISH SEE NOTE	APPROVED BY	
NEXT ASSY	USED ON				DESCRIPTION BNC MALE TO XH MACRO HOOK LEADS, RG58 CABLE
APPLICATION		DO NOT SCALE DRAWING			SIZE CODE IDENT NO. DRAWING NO. REV. B 08505 1020XH
					SCALE 1:1 SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.