
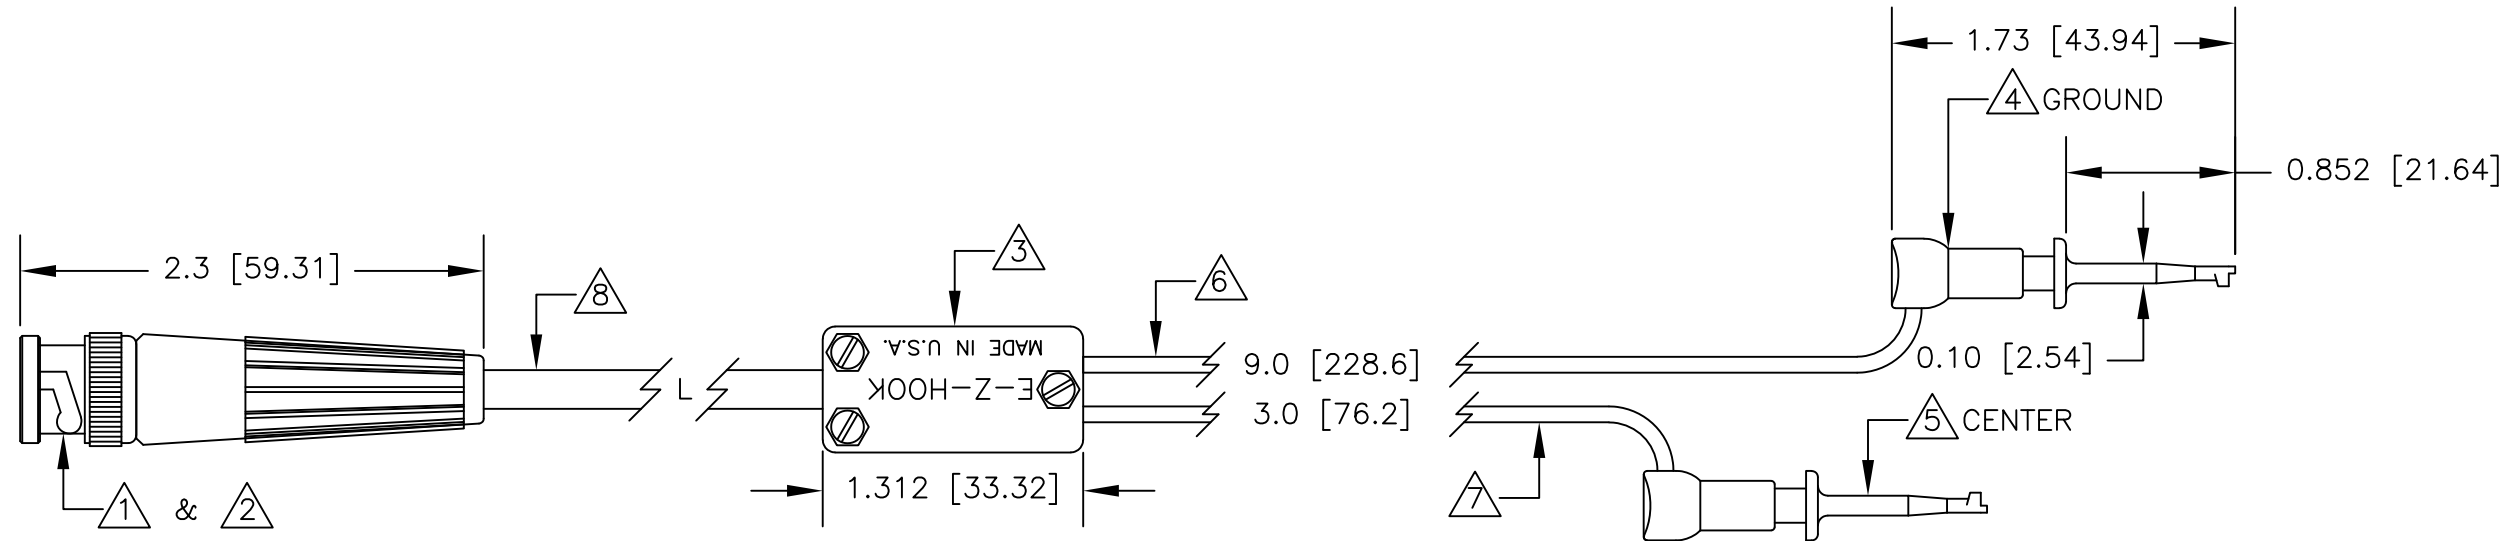


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901  
BODY & FITTINGS: NICKEL PLATED BRASS  
CONTACT: GOLD PLATED BRASS.  
DIELECTRIC: PTFE  
SPRING: NICKEL PLATED SK5  
GASKET: RED RUBBER
2. P/N: SR58BLK  
BOOT: BLK MOLDED PVC
3. P/N: Y-1000  
HOUSING: BLK MOLDED NYLON  
HARDWARE: SS SCREW, NUTS & WASHER
4. P/N: XMBLK  
HOUSING: BLK MOLDED NYLON.  
CONTACT: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
5. P/N: XMRED  
HOUSING: RED MOLDED NYLON.  
CONTACT: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
6. P/N: W-500/0  
20AWG TINNED COPPER STRANDING  
0.080 [2.03] O.D. PVC INSULATION
7. P/N: W-500/2  
20AWG TINNED COPPER STRANDING  
0.080 [2.03] O.D. PVC INSULATION
8. P/N: C-1000/0  
20AWG RG58C/U CABLE  
0.195 [4.95] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

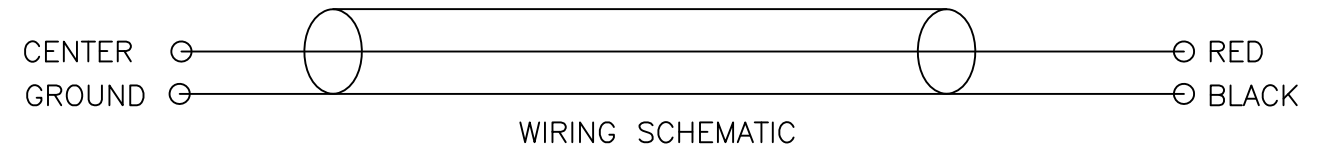

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE	DRAWN R.L.	8/18	DESCRIPTION BNC MALE TO XM MICRO HOOK LEADS, RG58 CABLE
		FINISH SEE NOTE	APPROVED BY		
NEXT ASSY	USED ON				SIZE CODE IDENT NO. DRAWING NO. REV. <b>B 08505 1020XM</b>
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1