
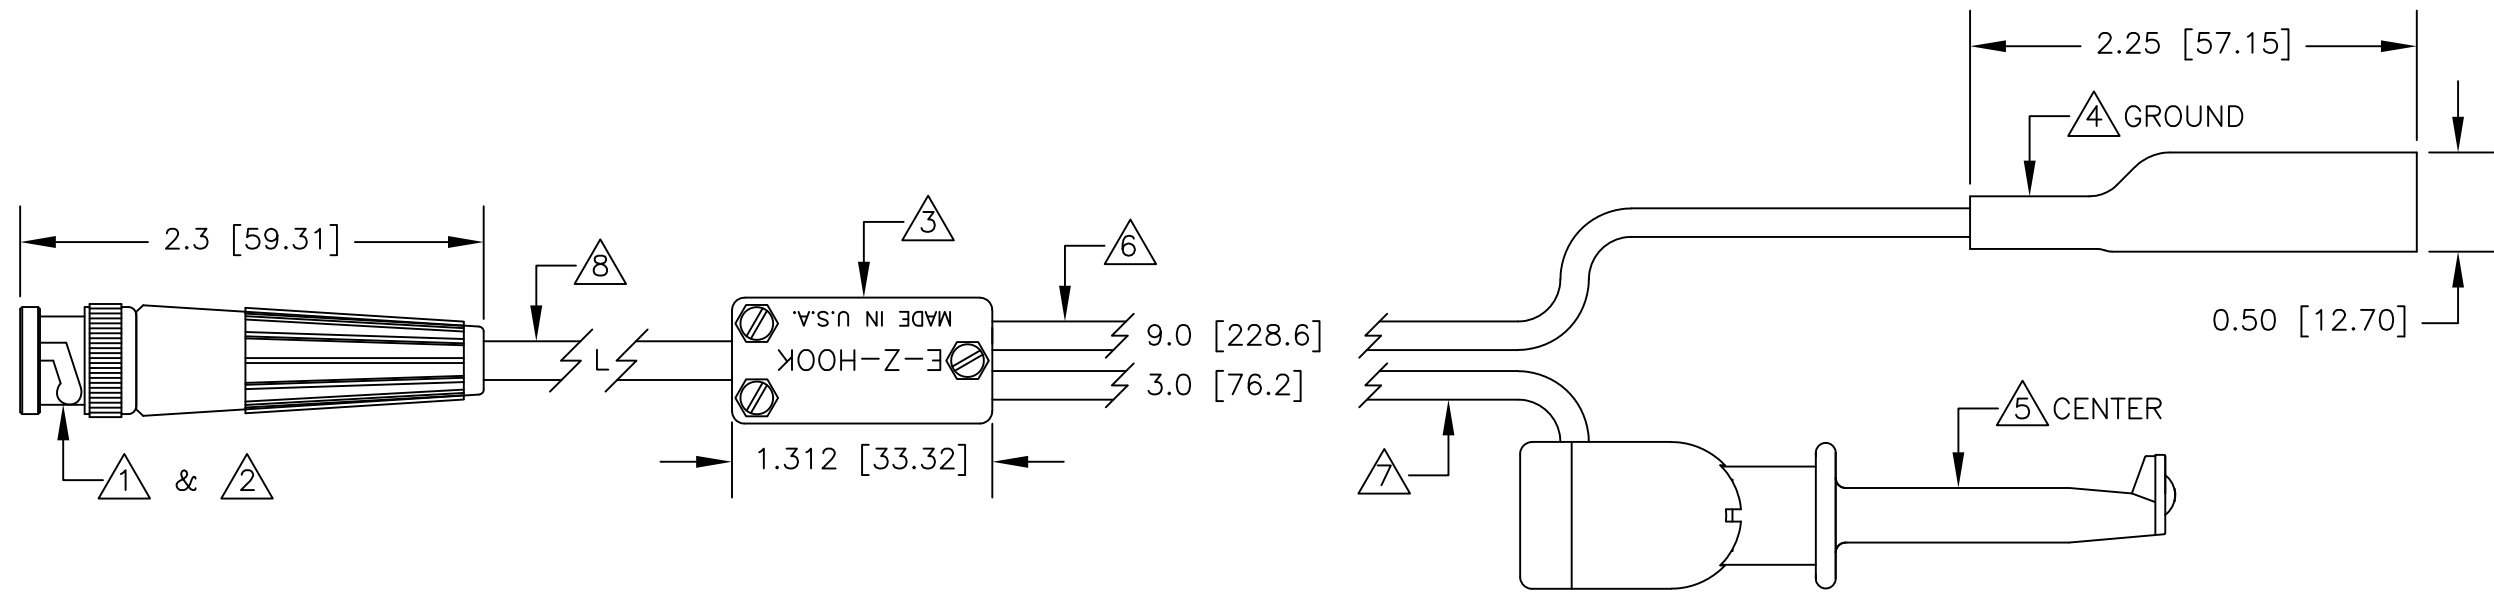


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901
 BODY & FITTINGS: NICKEL PLATED BRASS
 CONTACT: GOLD PLATED BRASS.
 DIELECTRIC: PTFE
 SPRING: NICKEL PLATED SK5
 GASKET: RED RUBBER
2. P/N: SR58BLK
 BOOT: BLK MOLDED PVC
3. P/N: Y-1000-2
 HOUSING: BLK MOLDED NYLON
 HARDWARE: SS SCREW, NUTS & WASHER
4. P/N: 9274BLK
 INSULATOR: BLK MOLDED PVC.
 ALLIGATOR: NICKEL PLATED STEEL.
5. P/N: XHRED
 HOUSING: RED MOLDED NYLON.
 CONTACT: NICKEL SILVER ALLOY.
 SPRING: STAINLESS STEEL.
6. P/N: W-600/0
 18AWG TINNED COPPER STRANDING
 0.144 [3.66] O.D. PVC INSULATION
7. P/N: W-600/2
 18AWG TINNED COPPER STRANDING
 0.144 [3.66] O.D. PVC INSULATION
8. P/N: C-1000/0
 20AWG RG58C/U CABLE
 0.195 [4.95] O.D. PVC INSULATION

LTR	DESCRIPTION	REVISIONS	
		DATE	APPROVED

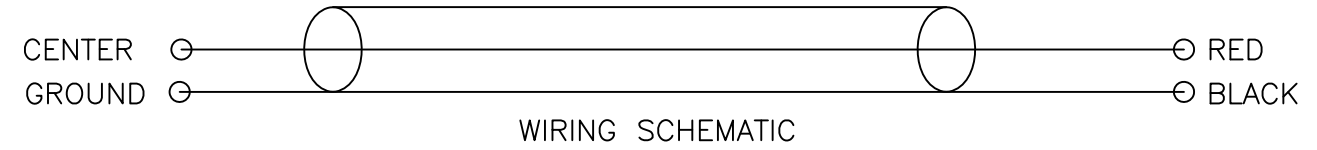

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE	DRAWN	R.L.	DESCRIPTION BNC MALE TO 9274 GRD/ XH CTR LEADS, RG58 CABLE
			APPROVED BY	8/18	
		FINISH SEE NOTE			SIZE
NEXT ASSY	USED ON				CODE IDENT NO.
APPLICATION		DO NOT SCALE DRAWING		DRAWING NO.	
				B 08505	1021XH
				SCALE	REV.
				1:1	
				SHEET 1 OF 1	