NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901
   BODY & FITTINGS: NICKEL PLATED BRASS
   CONTACT: GOLD PLATED BRASS.
   DIELECTRIC: PTFE
   SPRING: NICKEL PLATED SK5
   GASKET: RED RUBBER

2. P/N: 8911
   BODY & FITTINGS: NICKEL PLATED BRASS
   CONTACT: SILVER PLATED BRASS.
   DIELECTRIC: PANTONE DAP

3. P/N: SR58BLK
   BOOT: BLK MOLDED PVC

4. P/N: C-1000/0
   20AWG RG58C/U CABLE
   0.195 [4.95] O.D. PVC INSULATION

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED



WIRING SCHEMATIC

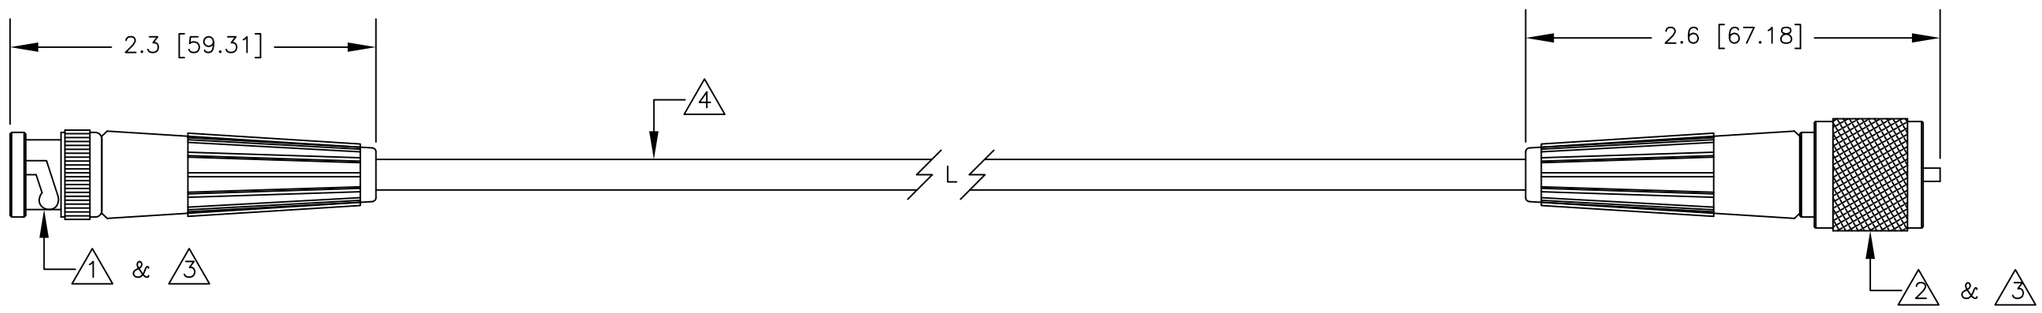

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±N/A .XX ± N/A ± N/A .XXX ±N/A	CONTRACT NO.	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS / DATE	
			DRAWN R.L. 3/19	DESCRIPTION: BNC MALE TO UHF MALE CABLE, RG58 CABLE
		MATERIAL: SEE NOTE	APPROVED BY	
		FINISH: SEE NOTE		SIZE B · CODE IDENT NO. 08505 · DRAWING NO. 1027 · REV.
NEXT ASSY	USED ON			SCALE 1:1 · SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.