
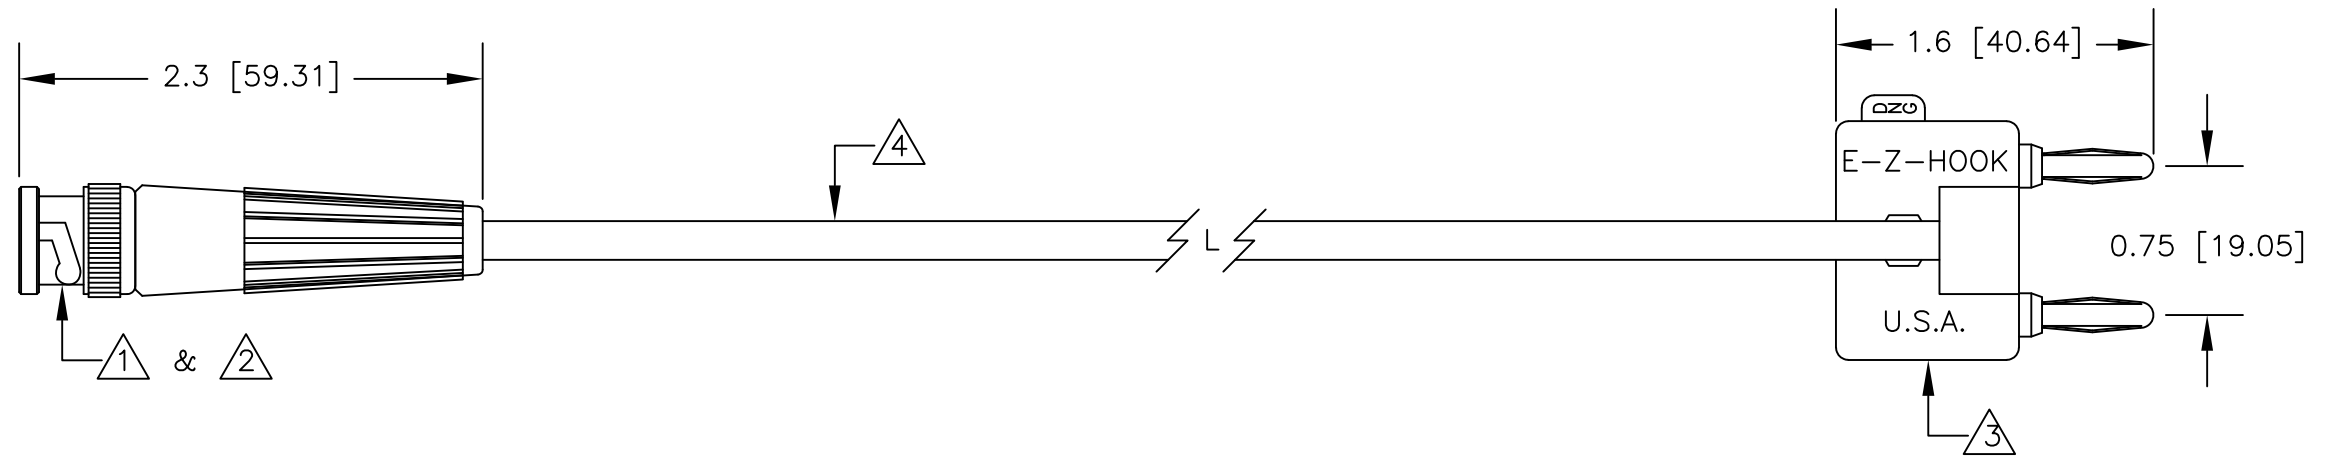


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 8901
 BODY & FITTINGS: NICKEL PLATED BRASS
 CONTACT: GOLD PLATED BRASS.
 DIELECTRIC: PTFE
 SPRING: NICKEL PLATED SK5
 GASKET: RED RUBBER
- P/N: SR58BLK
 BOOT: BLK MOLDED PVC
- P/N: DB750BLK
 HOUSING: BLK GLASS FILLED NYLON.
 FRAME: NICKEL PLATED BRASS.
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
 HARDWARE: BLACK OXIDE STEEL WIRE CLAMPING
 SET SCREW. STAINLESS STEEL HOUSING
 CLAMPING NUT & SCREW.

- P/N: C-1000/0
 20AWG RG58C/U CABLE
 0.195 [4.95] O.D. PVC INSULATION

LTR	DESCRIPTION	REVISIONS	
		DATE	APPROVED

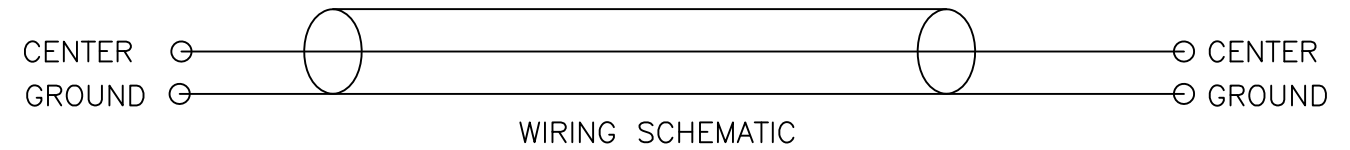

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
MATERIAL SEE NOTE		APPROVALS	DATE		
FINISH SEE NOTE		DRAWN R.L.	3/19	DESCRIPTION BNC MALE TO DB750 CABLE RG58 CABLE	
NEXT ASSY USED ON		APPROVED BY			
APPLICATION		DO NOT SCALE DRAWING		SIZE	REV.
				B	
				08505	
				1028	
				SCALE	
				1:1	
				SHEET 1 OF 1	