NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 8901
BODY & FITTINGS: NICKEL PLATED BRASS
CONTACT: GOLD PLATED BRASS.
DIELECTRIC: PTFE
SPRING: NICKEL PLATED SK5
GASKET: RED RUBBER

CENTER O

GROUND O

2. P/N: SR58BLK

BOOT: BLK MOLDED PVC

3. P/N: Y-1000

HOUSING: BLK MOLDED NYLON

HARDWARE: SS SCREW, NUTS & WASHER

4. P/N: 0202

BODY: NICKEL UNDERPLATED BRASS.

CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.

GOLD FLASH BeCu SPRING.


5. P/N: 0148/0

INSULATOR: HEAT SHRINK TUBING. BLACK.

6. P/N: W-200/0 22AWG TINNED COPPER STRANDING 0.070 [1.78] O.D. PVC INSULATION

7. P/N: W-200/2 22AWG TINNED COPPER STRANDING 0.070 [1.78] O.D. PVC INSULATION

8. P/N: C-1000/0 20AWG RG58C/U CABLE 0.195 [4.95] O.D. PVC INSULATION

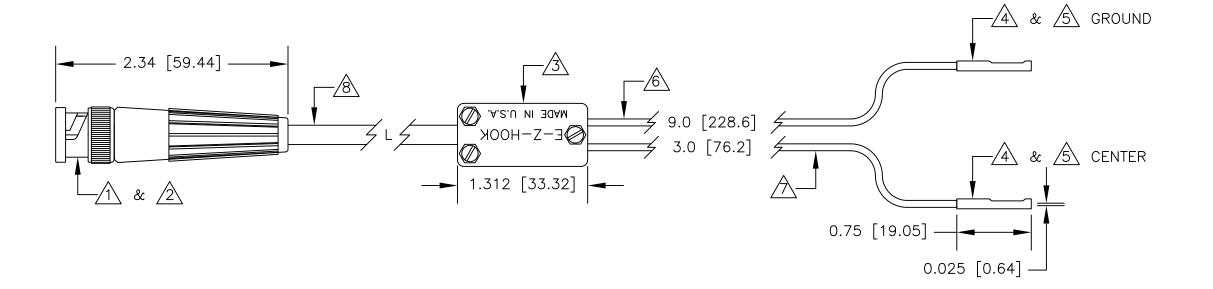

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A MATERIAL SEE NOTE	CONTRACT NO. APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			DRAWN R.L.	8/18	DESCRIPTION
			APPROVED BY		BNC MALE TO .025 SQ.
] SKT LEADS, RG58 CABLE
		FINISH			SIZE CODE IDENT NO. DRAWING NO. REV.
NEXT ASSY	USED ON	SEE NOTE			B 08505 1034
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1

WIRING SCHEMATIC

O RED

O BLACK