



NOTES: UNLESS OTHERWISE SPECIFIED

- 1. P/N: 8916
 BODY & FITTINGS: NICKEL PLATED BRASS
 CONTACT: GOLD PLATED BRASS.
 DIELECTRIC: PTFE
 SPRING: NICKEL PLATED SK5
 GASKET: RED RUBBER

- 2. P/N: SR58BLK
 BOOT: BLK MOLDED PVC

- 3. P/N: C-1000/0
 20AWG RG58C/U CABLE
 0.195 [4.95] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

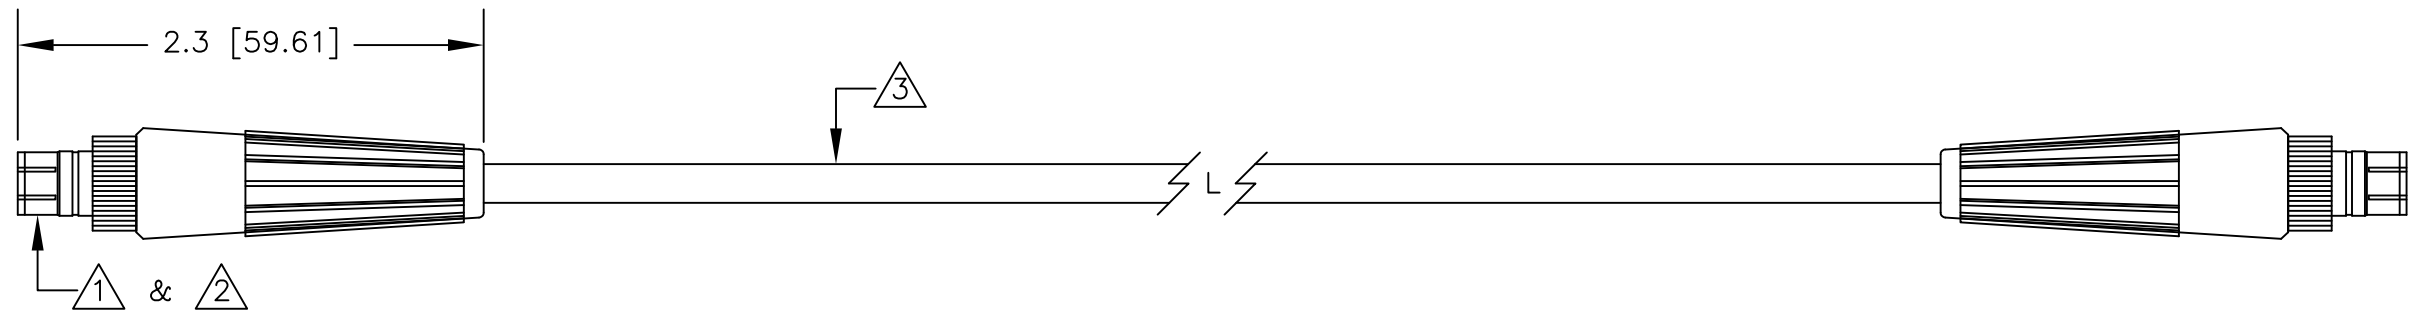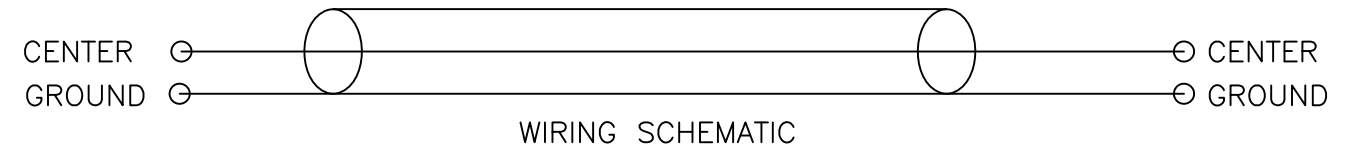

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE	DRAWN R.L.	4/19	DESCRIPTION BNC MALE, QUICK DISCONNECT JUMPER, RG58 CABLE
		FINISH SEE NOTE	APPROVED BY		
NEXT ASSY	USED ON				SIZE B
APPLICATION		DO NOT SCALE DRAWING			CODE IDENT NO. 08505
					DRAWING NO. 1504
					REV.
					SCALE 1:1
					SHEET 1 OF 1