



NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
 HOUSING & PLUNGER: NYLON. AVAILABLE IN 10 COLORS
 CONTACT BLADE: GOLD PLATED BeCu
 SPRING: STAINLESS STEEL
 HARDWARE: STAINLESS STEEL.
 CONTACT SOCKET: NICKEL PLATED BECU.

2. PERFORMANCE:
 MAXIMUM CURRENT: 5.9 AMPS WITH A 77° TEMPERATURE RISE.
 MAXIMUM VOLTAGE: 5.4 KV
 MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:
 HOOK FITS COMPONENTS UP TO $\phi 0.040$ " [$\phi 1.01$].
 $\phi 0.0163$ " [$\phi 0.414$] BANANA SOCKET.
 FIELD SERVICEABLE.

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

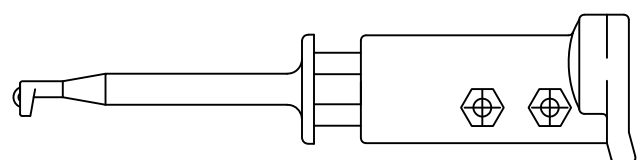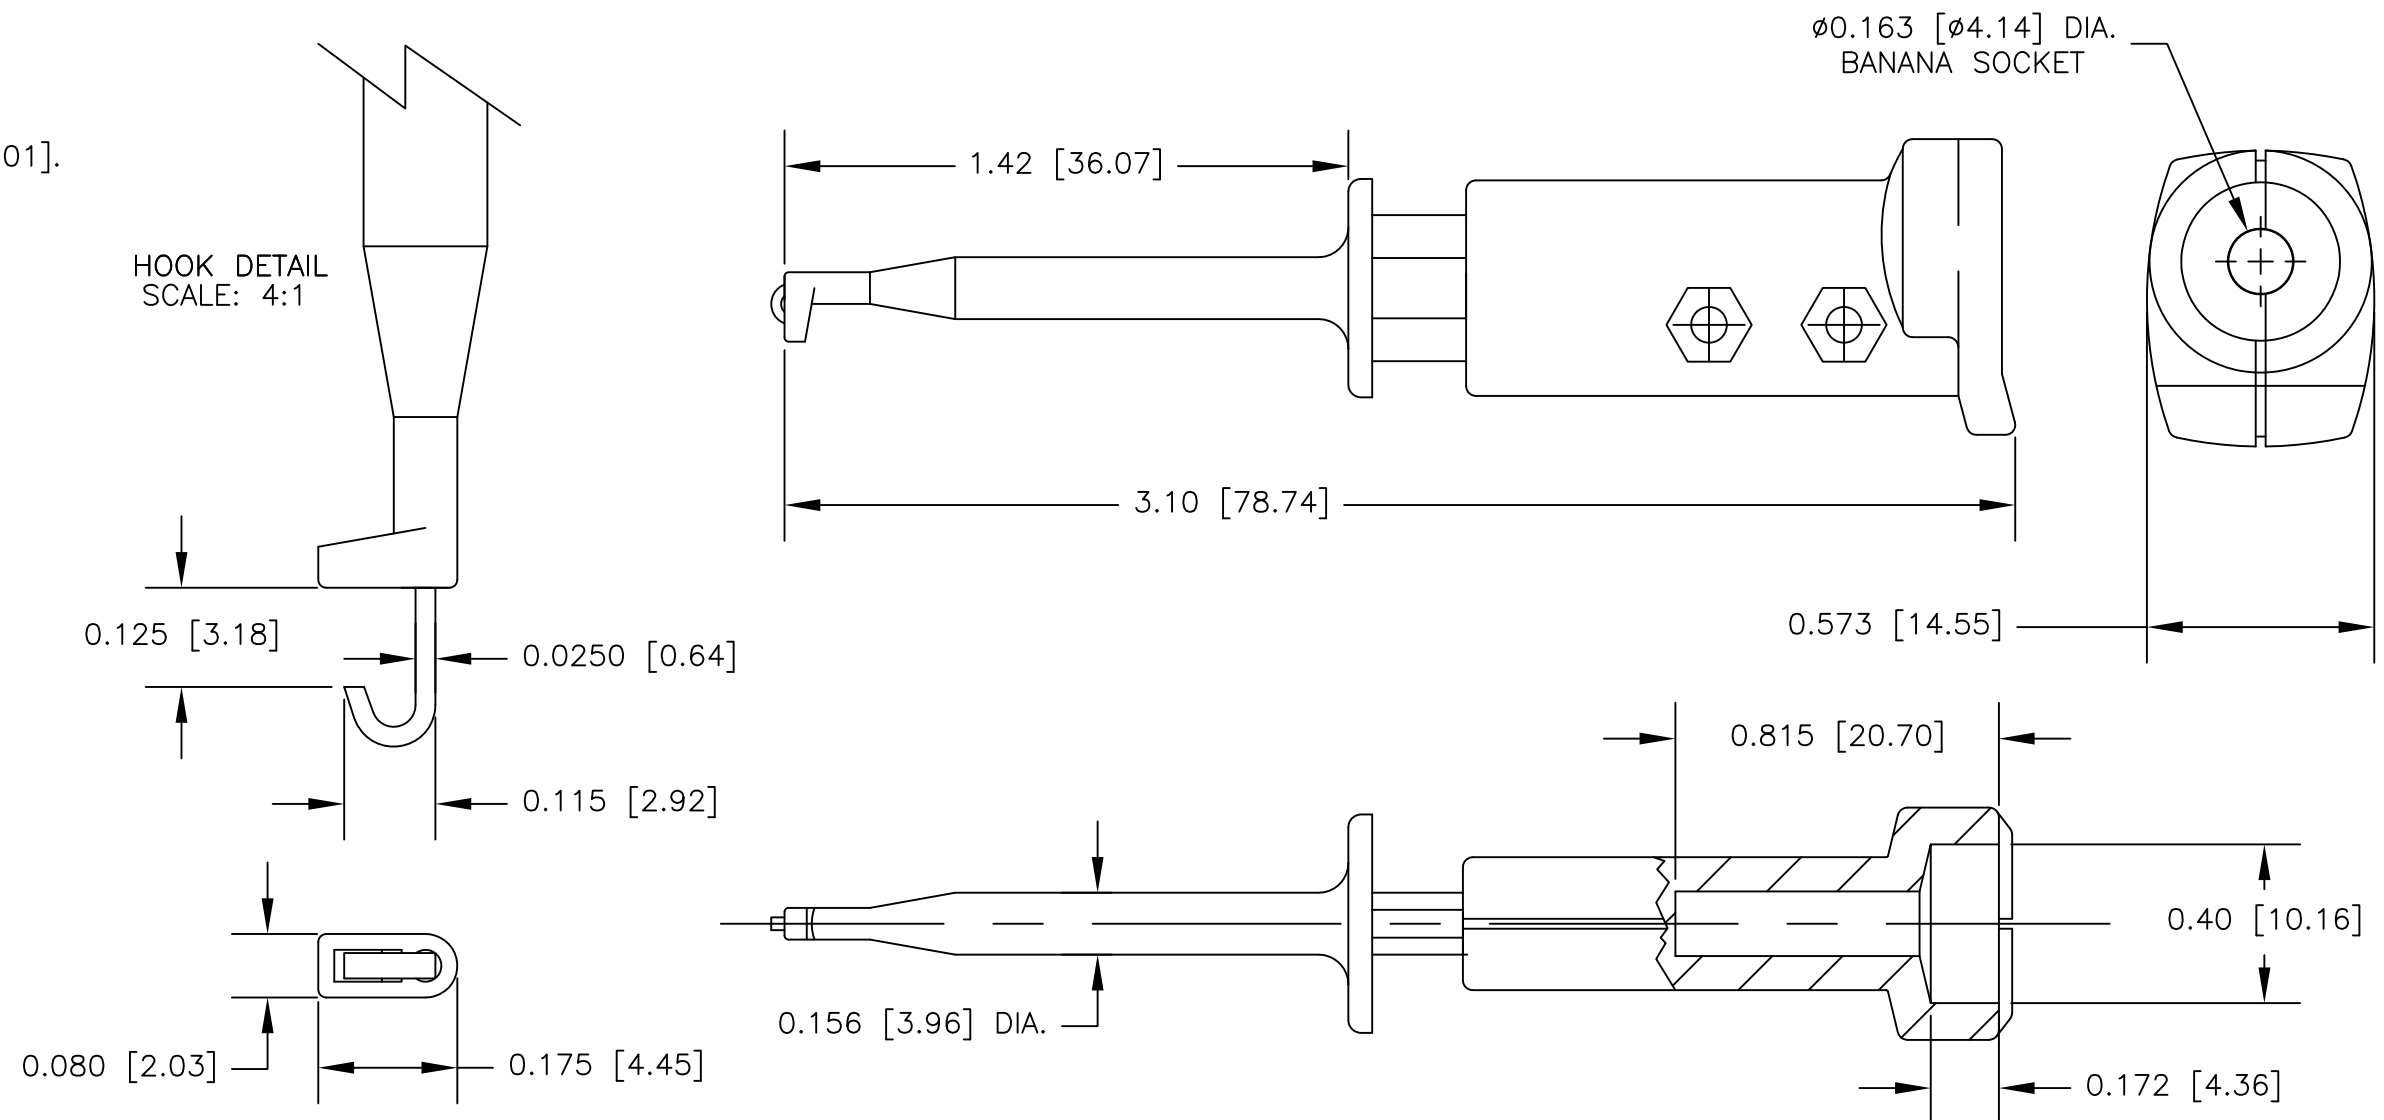

ACTUAL SIZE

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	11/09	DESCRIPTION MINI-HOOK (XR) W/STD BANANA SOCKET
		FINISH SEE NOTE.	APPROVED BY		SIZE B
NEXT ASSY	USED ON				CODE IDENT NO. 08505
APPLICATION		DO NOT SCALE DRAWING			DRAWING NO. 8037
					SCALE 2:1
					REV.
					SHEET 1 OF 1