


NOTES: UNLESS OTHERWISE SPECIFIED



1. CONNECTOR:
BODY & FITTINGS: NICKEL PLATED BRASS
CONTACT: GOLD PLATED PHOSPHOR BRONZE
DIELECTRIC: PTFE
SPRING: NICKEL PLATED SK5
GASKET: RED RUBBER

2. PERFORMANCE:
IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 V RMS
FREQUENCY RANGE: 0-4 GHz
INSERTION LOSS: ≤ −.2 dB @ 3 GHz

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

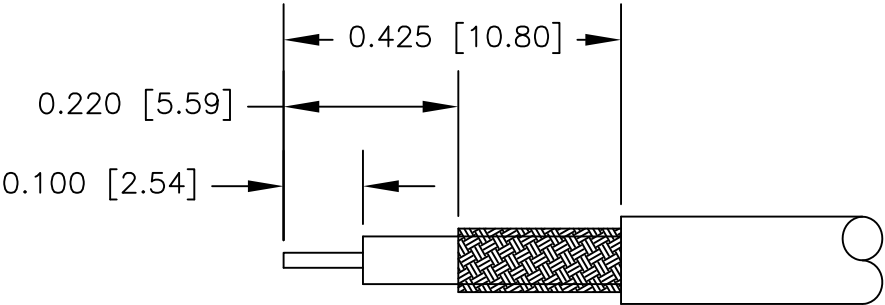


RECOMMENDED STRIPPING DIMENSIONS

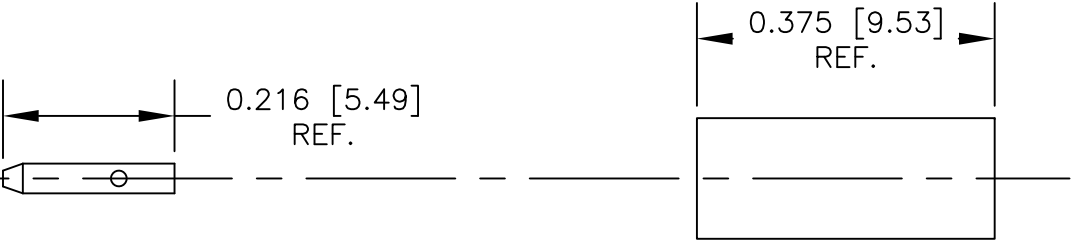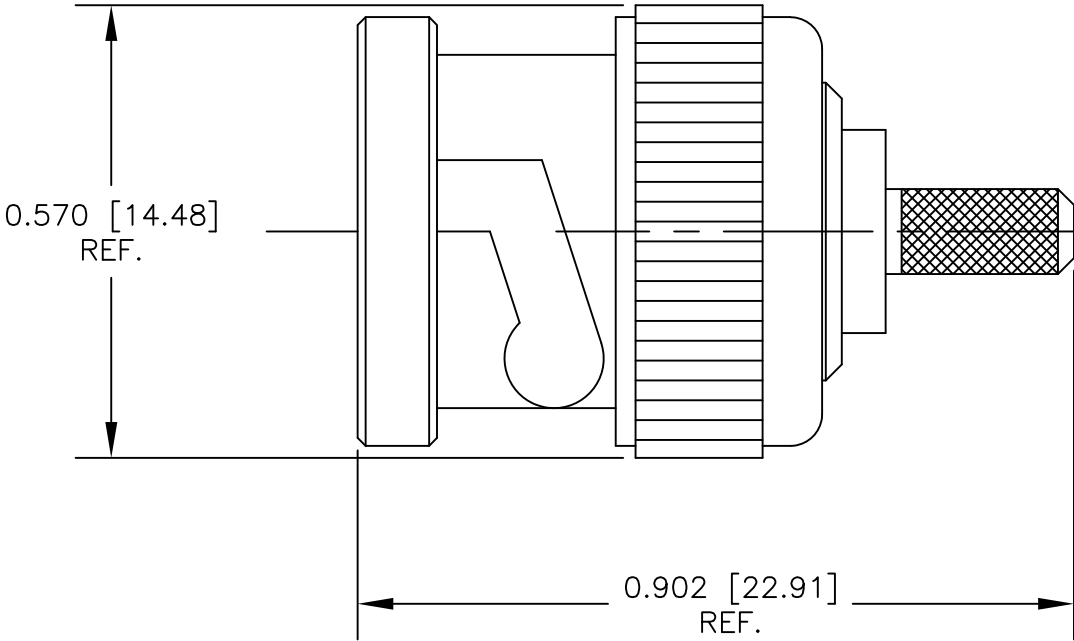

RECOMMENDED CRIMP DIE: 0.029 [0.74]

RECOMMENDED CRIMP DIE: 0.130 [3.30]

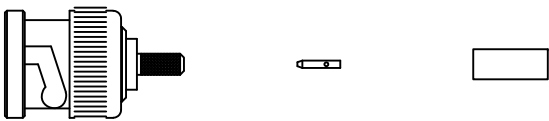

ACTUAL SIZE

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A	CONTRACT NO.		E-Z-HOOK ® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
			APPROVALS	DATE				
			DRAWN S.B.W.	2/04				
		MATERIAL	APPROVED BY		DESCRIPTION BNC MALE, CRIMP			
		FINISH			SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON				B	08505	8905	
APPLICATION		DO NOT SCALE DRAWING			SCALE 4:1		SHEET 1 OF 1	