


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274BLK  
INSULATOR: MOLDED PVC.  
ALLIGATOR: NICKEL PLATED STEEL.
2. P/N: 9274RED  
INSULATOR: MOLDED PVC.  
ALLIGATOR: NICKEL PLATED STEEL.
3. P/N: 9267-0002  
BODY & FITTINGS: NICKEL PLATED BRASS  
CONTACT: GOLD PLATED BRASS  
DIELECTRIC: PTFE.  
SPRING: SK-5  
GASKET: S.I. RUBBER
4. P/N: 0482, P/N 0436, P/N 0501, & P/N 0344  
HOUSING: MOLDED DELRIN. BLACK.  
CONTACT: GOLD PLATED BRASS  
HEAT SHRINK: BLK H.S. TUBING  
WASHER: COPPER, NICKEL & TIN PLATED CSR
5. P/N: W-600/0  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION
6. P/N: W-600/2  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION
7. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 300V AC  
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

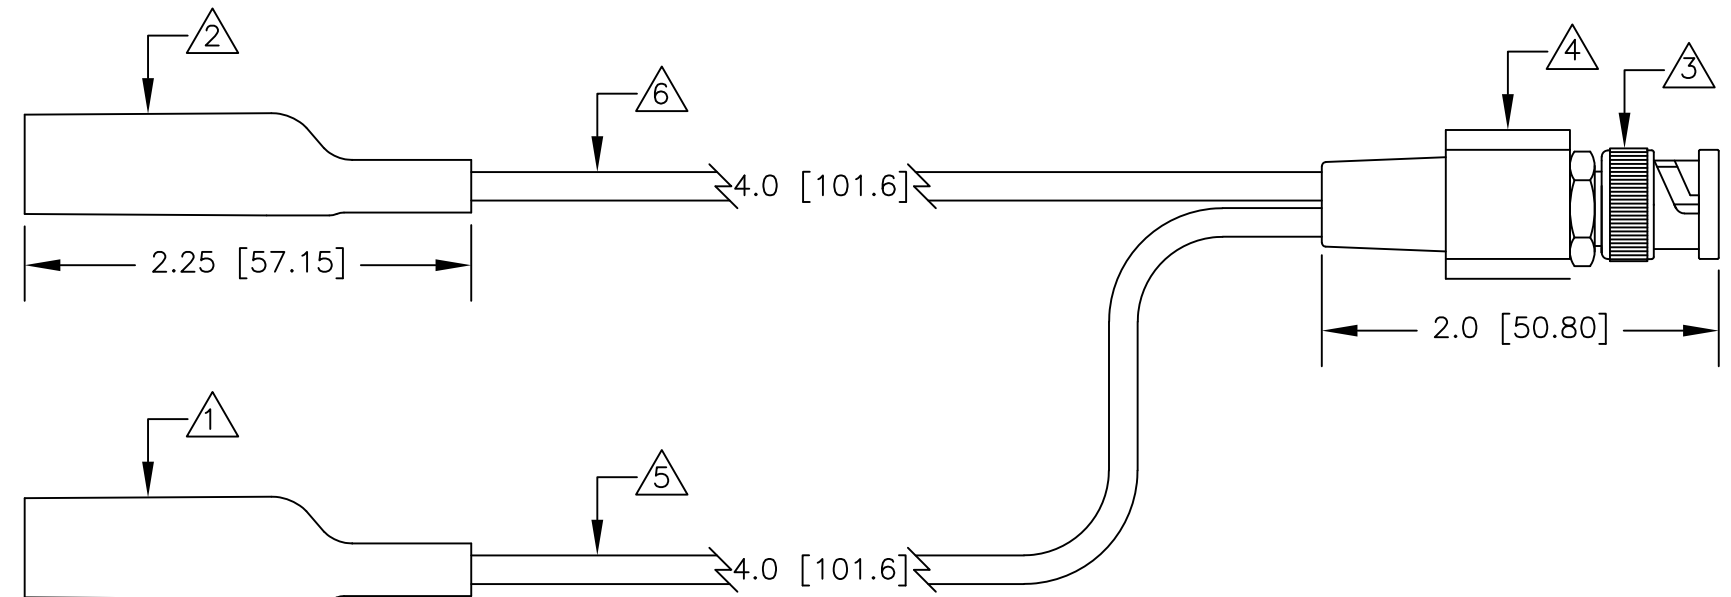

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN	R.L.	1/18
			APPROVED BY		
NEXT ASSY	USED ON	FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.
APPLICATION		DO NOT SCALE DRAWING	<b>B</b>	<b>08505</b>	<b>9029</b>
			SCALE	1:1	SHEET 1 OF 1