


NOTES: UNLESS OTHERWISE SPECIFIED

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

- CONSTRUCTION:
INSULATOR: MOLDED PVC. AVAILABLE IN BLK & RED
CONTACT: GOLD PLATED COPPER, NICKEL ALLOY
SOCKET: TIN PLATED BRASS


2. SET OF 16 CONTAINING 1 R/B SET OF 9334 TO 9341

P/N: 9334 (R/B SET)

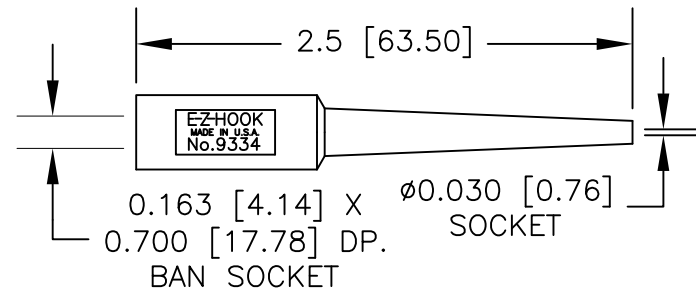


PERFORMANCE
MAXIMUM CURRENT: 4 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9335 (R/B SET)

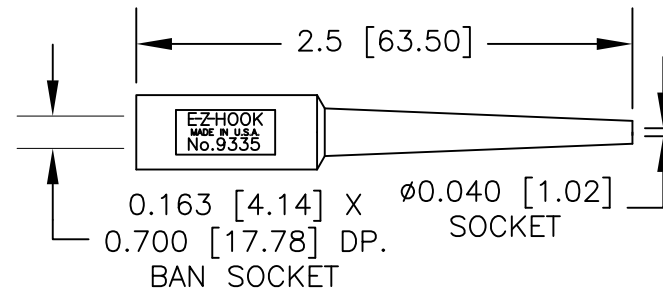


PERFORMANCE
MAXIMUM CURRENT: 7.5 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9336 (R/B SET)

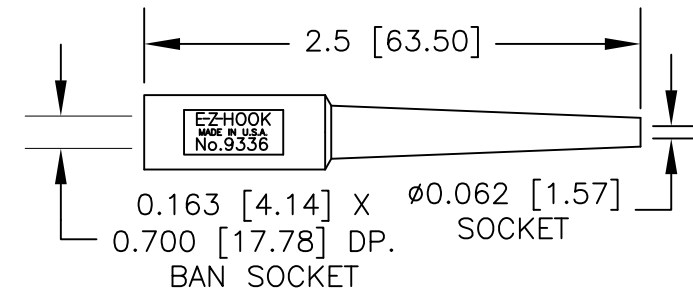


PERFORMANCE
MAXIMUM CURRENT: 13 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9337 (R/B SET)

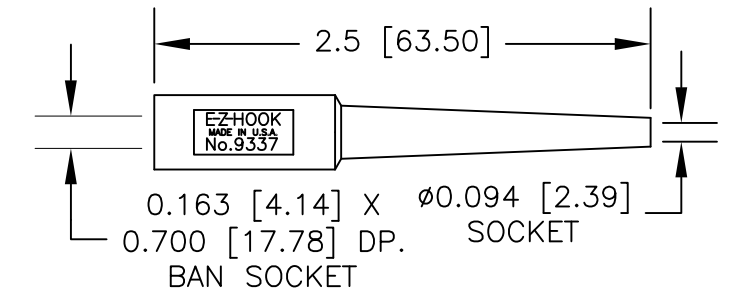


PERFORMANCE
MAXIMUM CURRENT: 15 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9338 (R/B SET)

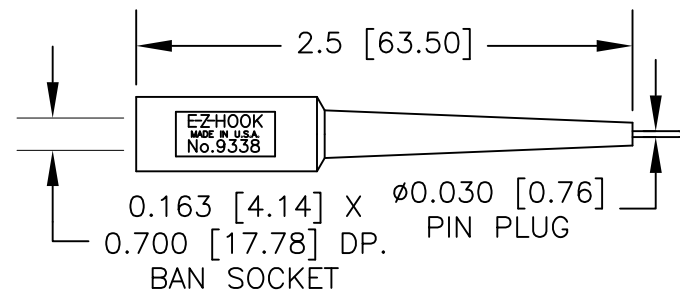


PERFORMANCE
MAXIMUM CURRENT: 4 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9339 (R/B SET)

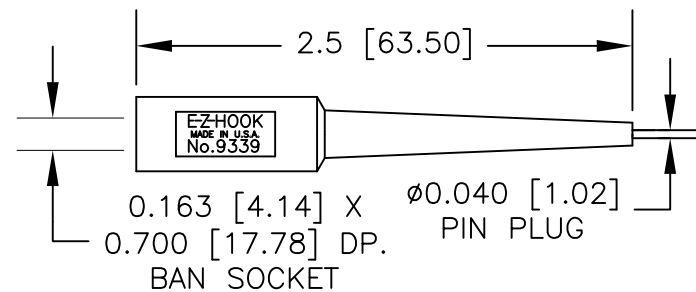


PERFORMANCE
MAXIMUM CURRENT: 7.5 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9340 (R/B SET)

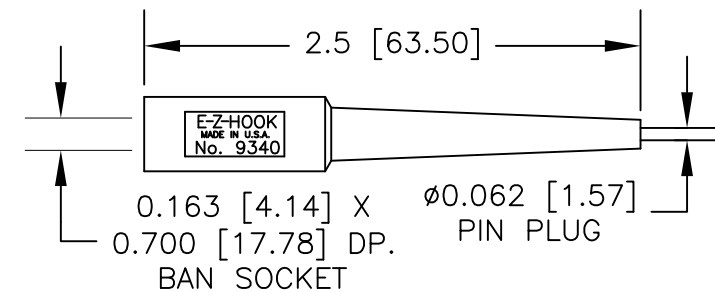

PERFORMANCE
MAXIMUM CURRENT: 13 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9341 (R/B SET)

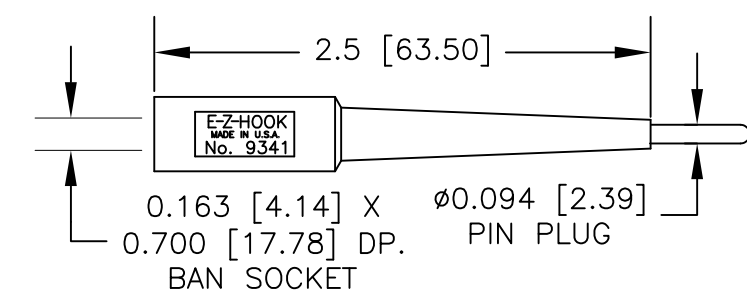

PERFORMANCE
MAXIMUM CURRENT: 15 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		
MATERIAL SEE NOTE.		APPROVALS	DATE			
FINISH SEE NOTE.		DRAWN	R.L.	3/15	DESCRIPTION E-Z-FLEX ADAPTER KIT	
NEXT ASSY		APPROVED BY		SIZE		
APPLICATION		DO NOT SCALE DRAWING		CODE IDENT NO.	DRAWING NO.	REV.
				B	08505	9099-0316
				SCALE	1:1	SHEET 1 OF 1