

NOTES: UNLESS OTHERWISE SPECIFIED


LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

1. CONSTRUCTION:

INSULATOR: MOLDED PVC. AVAILABLE IN BLK & RED
 CONTACT: GOLD PLATED COPPER, NICKEL ALLOY
 SOCKET: TIN PLATED BRASS
 SOCKET: NICKEL PLATED BeCu


2. SET OF 16 CONTAINING 1 R/B SET OF 9334-0003 TO 9341-0003

P/N: 9334-0003 (R/B SET)

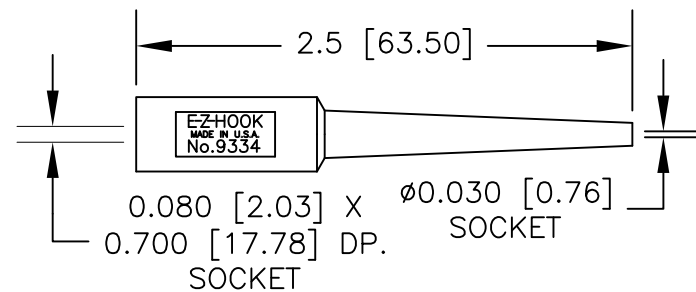


PERFORMANCE
 MAXIMUM CURRENT: 4 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9335-0003 (R/B SET)

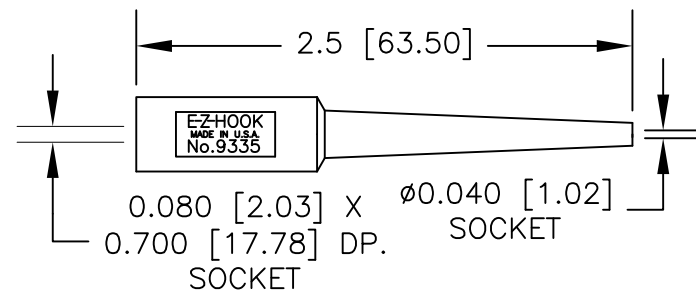


PERFORMANCE
 MAXIMUM CURRENT: 7.5 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9336-0003 (R/B SET)

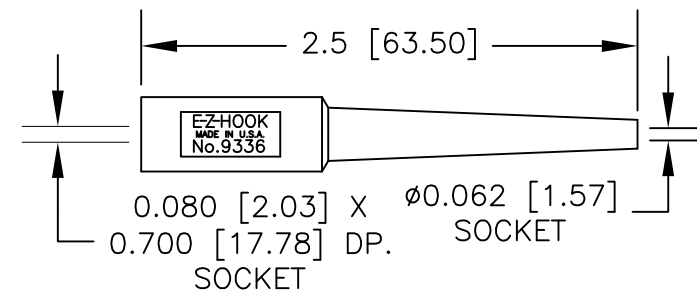


PERFORMANCE
 MAXIMUM CURRENT: 13 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9337-0003 (R/B SET)

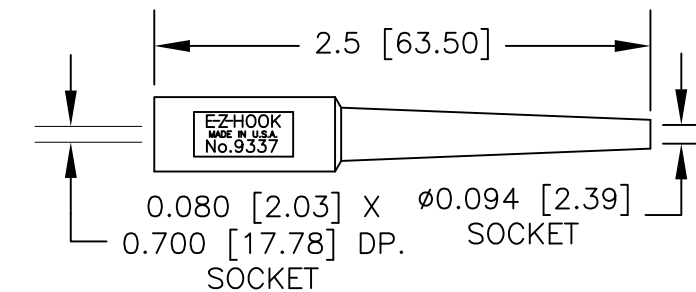


PERFORMANCE
 MAXIMUM CURRENT: 15 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9338-0003 (R/B SET)

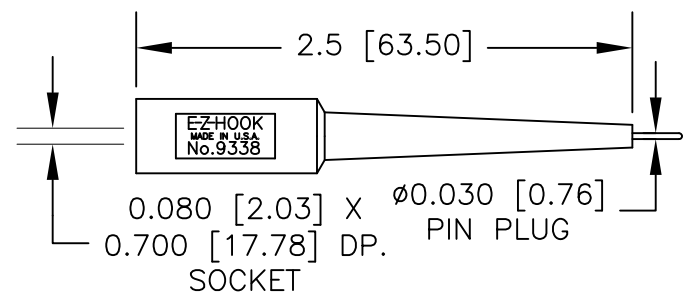


PERFORMANCE
 MAXIMUM CURRENT: 4 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9339-0003 (R/B SET)

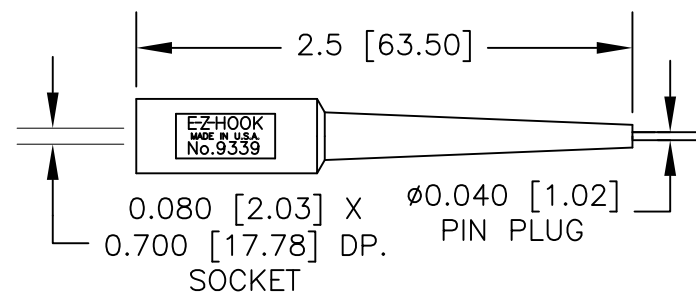


PERFORMANCE
 MAXIMUM CURRENT: 7.5 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9340-0003 (R/B SET)

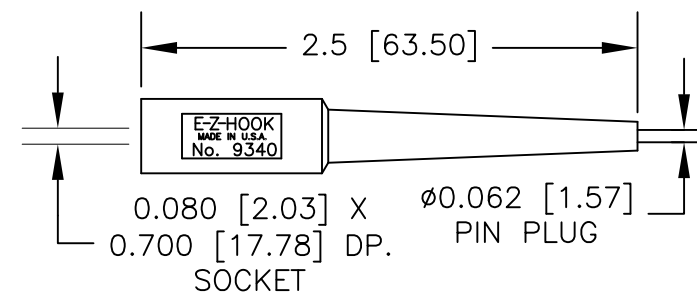

PERFORMANCE
 MAXIMUM CURRENT: 13 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

P/N: 9341-0003 (R/B SET)

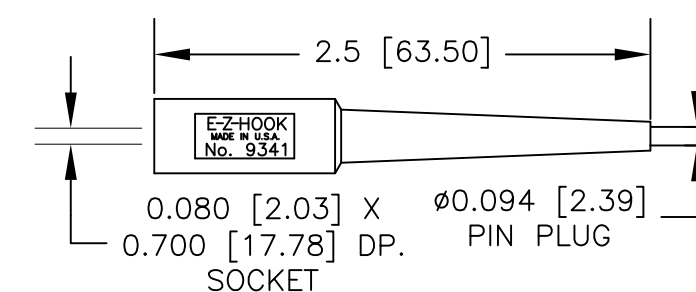

PERFORMANCE
 MAXIMUM CURRENT: 15 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN	R.L.	3/15
			APPROVED BY		
NEXT ASSY	USED ON	FINISH SEE NOTE.			DESCRIPTION E-Z-FLEX ADAPTER KIT MODIFIED W/0.080 [2.03] SKT
APPLICATION			DO NOT SCALE DRAWING	SIZE	CODE IDENT NO.
			B	08505	9099-0491
			SCALE	1:1	REV. SHEET 1 OF 1