


NOTES: UNLESS OTHERWISE SPECIFIED


1. CONSTRUCTION:  
 HOUSING: MOLDED NYLON AVAILABLE IN ALL TEN COLORS  
 FRAME: SILVER PLATED BRASS.  
 CONTACT: SILVER PLATED BeCu

2. PERFORMANCE:  
 CURRENT: 10 AMPS  
 BREAKDOWN VOLTAGE: 5700 VRMS MIN  
 CONTACT RESISTANCE: 0.010 OHMS MAX  
 CONTACT TO PANEL C: 2 Pf NOMINAL

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

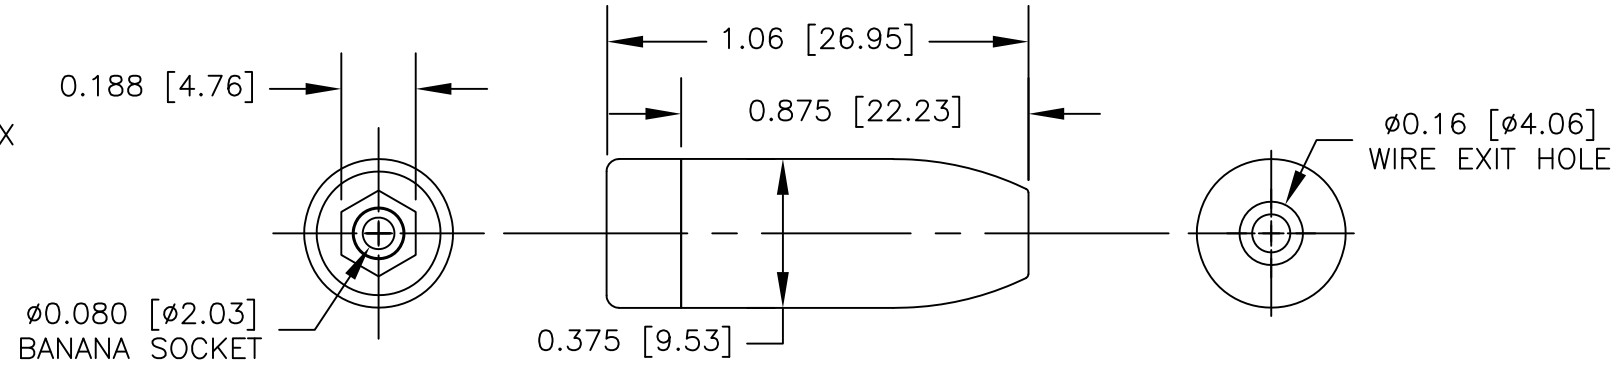

### ASSEMBLY INSTRUCTIONS

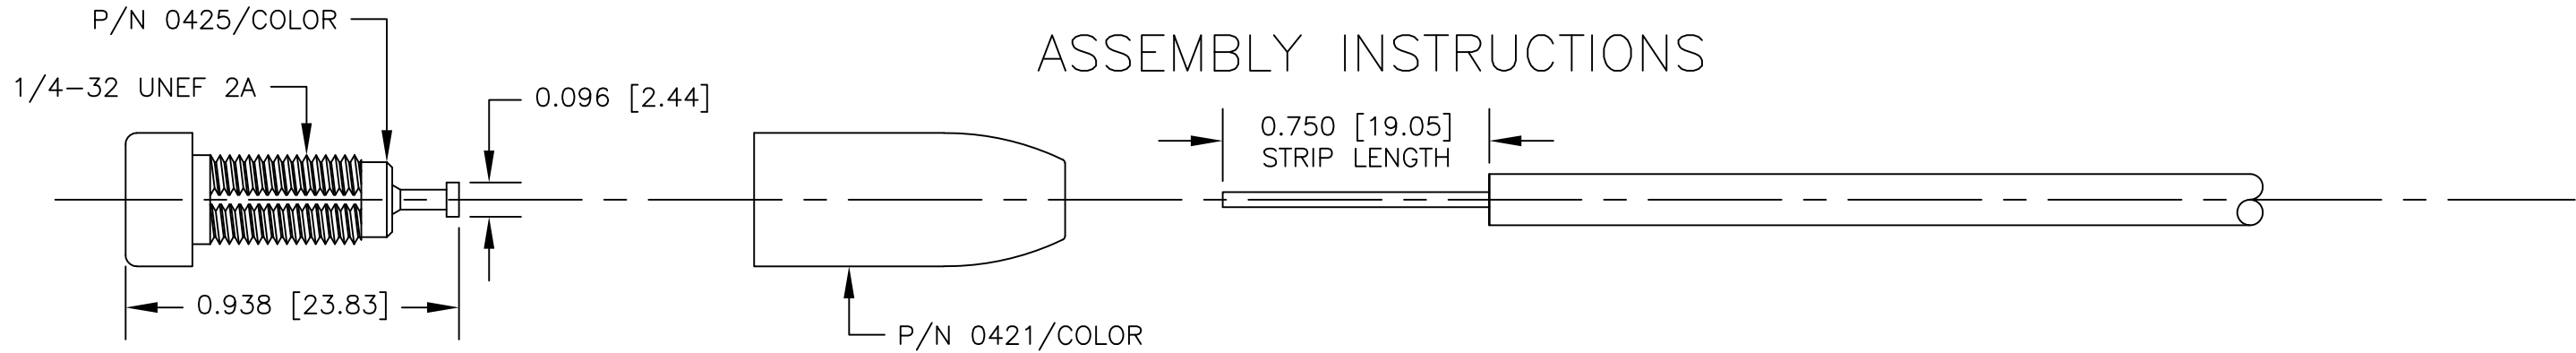

INSERT THE WIRE THROUGH THE BACK OF THE STD BAN PLUG HANDLE P/N 0421/COLOR


WRAP THE STRANDING UNDERNEATH THE TAB IN THE SAME DIRECTION AS THE THREADS & SOLDER

\*\*\*\*\*

TRY TO AVOID GETTING THE SOLDER BEYOND THE HOUSING DIAMETER. THIS WILL MAKE SCREWING ON THE STD BAN PLUG HANDLE P/N 0421/COLOR MORE DIFFICULT

SCREW ON THE BANANA PLUG HANDLE

USING A 0.188 [4.77] SOCKET WRENCH TIGHTEN THE BANANA PLUG HANDLE



ACTUAL SIZE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A		CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
		APPROVALS	DATE				
MATERIAL SEE NOTE		DRAWN	R.L.	4/18	DESCRIPTION STANDARD $\phi 0.080$ [ $\phi 2.03$ ] TIP SOCKET		
		APPROVED BY					
NEXT ASSY		USED ON		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
APPLICATION		DO NOT SCALE DRAWING		B	08505	9211	
				SCALE	2:1		SHEET 1 OF 1