


NOTES: UNLESS OTHERWISE SPECIFIED

1. PERFORMANCE:
 DIELECTRIC STRENGTH : 5KV AT THINNEST
 CROSS SECTION
 OPERATING TEMPERATURE: 20°F(30°C) TO 160°F(71°C)

LTR	DESCRIPTION	DATE	APPROVEI

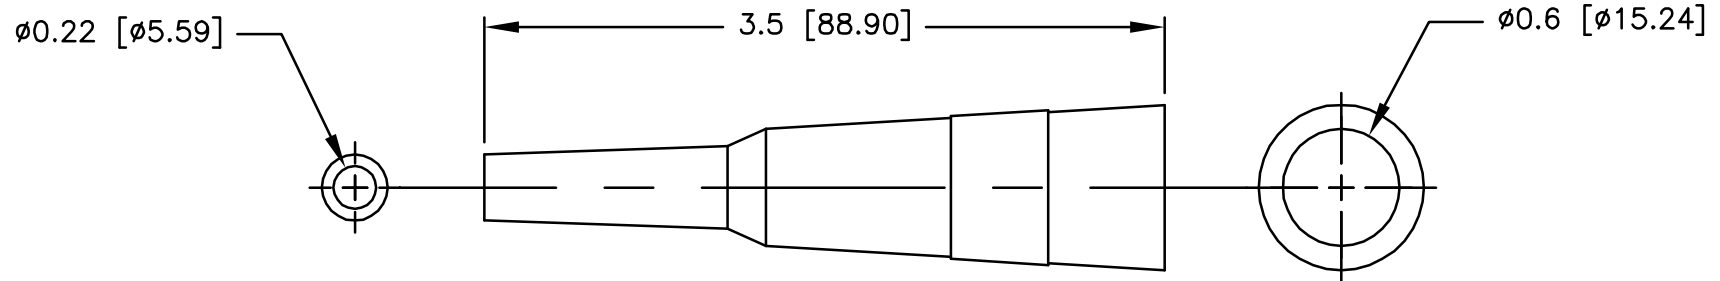

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± ± .XXX ± ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
			APPROVALS	DATE				
		MATERIAL FLEXIBLE PVC	DRAWN	R.L.	9/16	DESCRIPTION INSULATION BOOT		
			APPROVED BY					
		FINISH BLACK OR RED			SIZE	CODE IDENT NO.	DRAWING NO.	REV
NEXT ASSY	USED ON				A	08505	9352	
APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1	SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.