

NOTES: UNLESS OTHERWISE SPECIFIED


1. CONSTRUCTION:

- INSULATOR: MOLDED PVC. AVAILABLE IN BLK & RED
- PIN CONTACT: NICKEL PLATED ANACONDA OR BOILCAT
- SOCKET: TIN PLATED BRASS
- .080 SOCKET FRAME: NICKEL PLATED BRASS.
- .080 SOCKET SPRING: SILVER PLATED BeCu OR PHOSPHOR BRONZE.

2. FEATURES

REAR SOCKET ACCEPTS STD PIN PLUGS

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

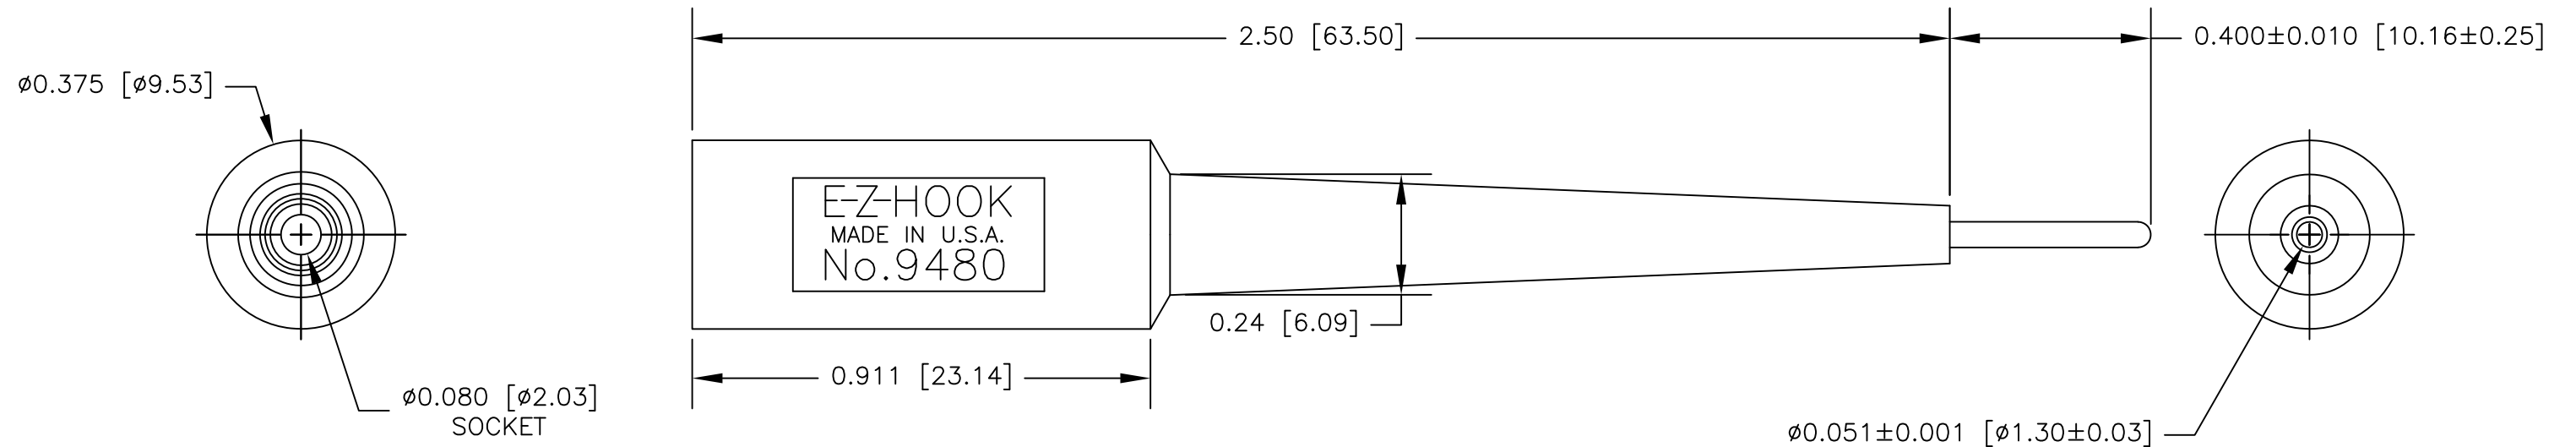

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L. 10/10	DESCRIPTION E-Z-FLEX .080 BAN SKT TO 0.051 [0.76] PIN ADAPTER	
			APPROVED BY			
NEXT ASSY	USED ON	FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
APPLICATION		DO NOT SCALE DRAWING	<b>B</b>	<b>08505</b>	9480	
			SCALE	3:1	SHEET 1 OF 1	