

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230  
BODY & FITTINGS: BRASS. NICKEL PLATED.  
PIN: BRASS. GOLD PLATED.  
DIELECTRIC: PTFE.
2. P/N: 0480 & P/N: 0148/0 & P/N: 0581  
HOUSING: BLK MOLDED DELRIN  
CONTACT: GOLD PLATED BeCu  
HEAT SHRINK: BLK HEAT SHRINK



3. P/N: X100W2BLK  
HOUSING: BLK MOLDED NYLON.  
CONTACT: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.

4. P/N: X100W2RED  
HOUSING: RED MOLDED NYLON.  
CONTACT: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.

5. P/N: W-500/0  
20AWG TINNED COPPER STRANDING  
0.080 [2.03] O.D. PVC INSULATION

6. P/N: W-500/2  
20AWG TINNED COPPER STRANDING  
0.080 [2.03] O.D. PVC INSULATION

	REVISIONS			
	LTR	DESCRIPTION	DATE	APPROVED

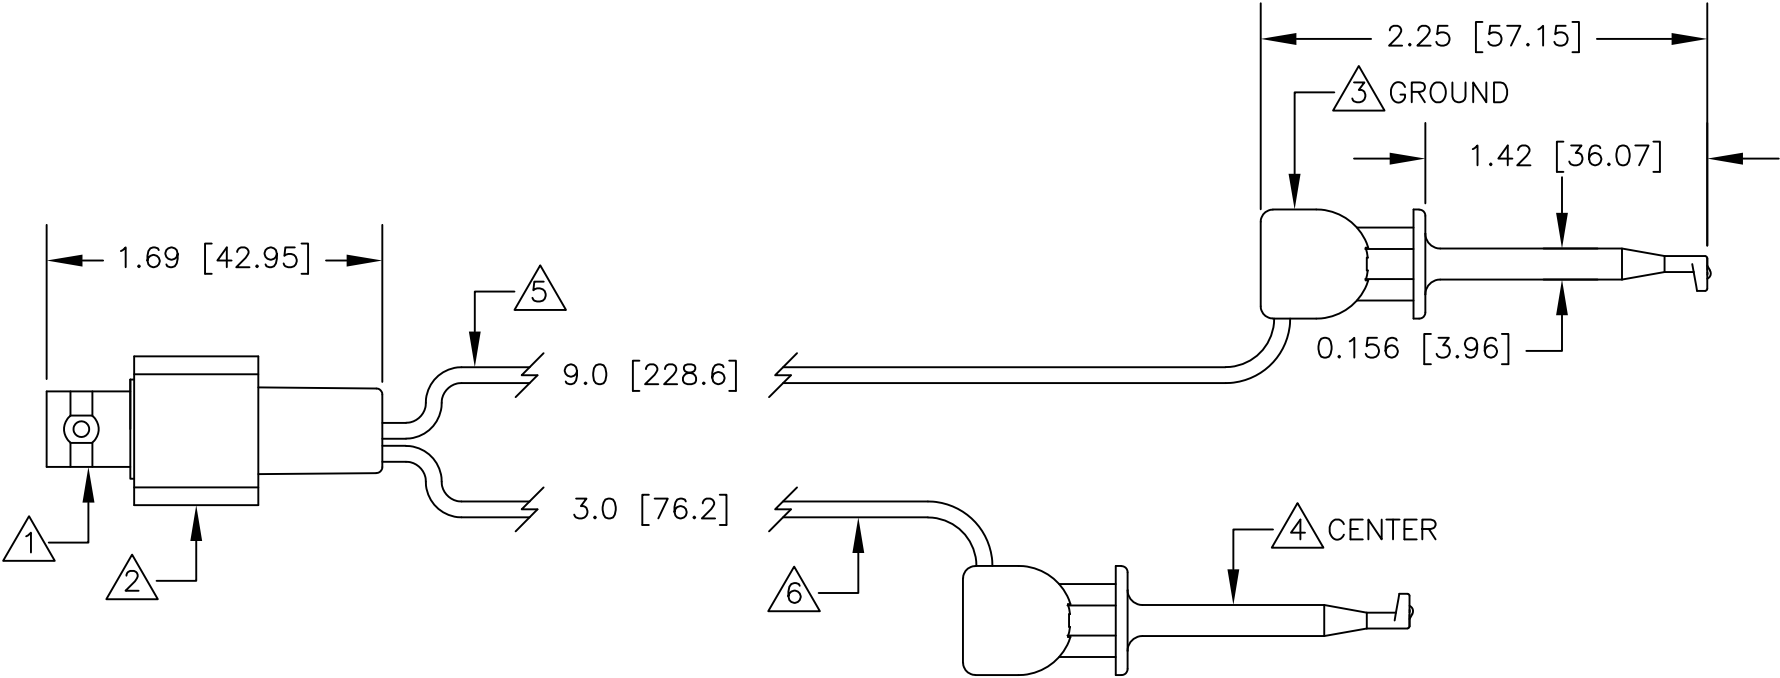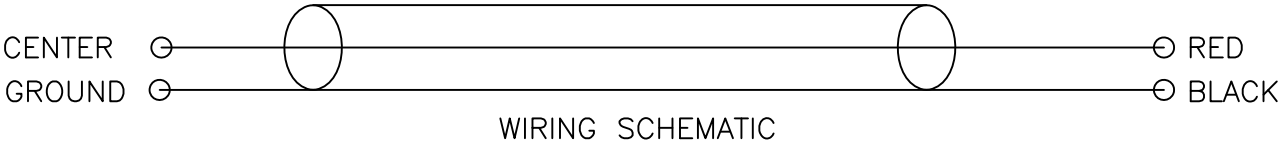

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div><div>E-Z-HOOK®</div><div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div></div>			
			APPROVALS	DATE	DESCRIPTION BNC FEMALE BREAKOUT TO X100W2 MINIHOOK LEADS			
			DRAWN R.L.	4/19				
		MATERIAL SEE NOTE.	APPROVED BY		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
		FINISH SEE NOTE.			B	08505	1001W2	
NEXT ASSY	USED ON				SCALE	1:1		
APPLICATION		DO NOT SCALE DRAWING			SHEET 1 OF 1			