

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230
 BODY & FITTINGS: BRASS. NICKEL PLATED.
 PIN: BRASS. GOLD PLATED.
 DIELECTRIC: PTFE.

2. P/N: 0482 & P/N: 0148/0 & P/N: 0581
 HOUSING: BLK MOLDED DELRIN
 CONTACT: GOLD PLATED BeCu
 HEAT SHRINK: BLK HEAT SHRINK



3. P/N: XHBLK
 HOUSING: BLK MOLDED NYLON.
 CONTACT: NICKEL SILVER ALLOY.
 SPRING: STAINLESS STEEL

4. P/N: XHRED
 HOUSING: RED MOLDED NYLON.
 CONTACT: NICKEL SILVER ALLOY.
 SPRING: STAINLESS STEEL

5. P/N: W-600/0
 18AWG TINNED COPPER STRANDING
 0.144 [3.66] O.D. PVC INSULATION

6. P/N: W-600/2
 18AWG TINNED COPPER STRANDING
 0.144 [3.66] O.D. PVC INSULATION

LTR	DESCRIPTION	REVISIONS	
		DATE	APPROVED

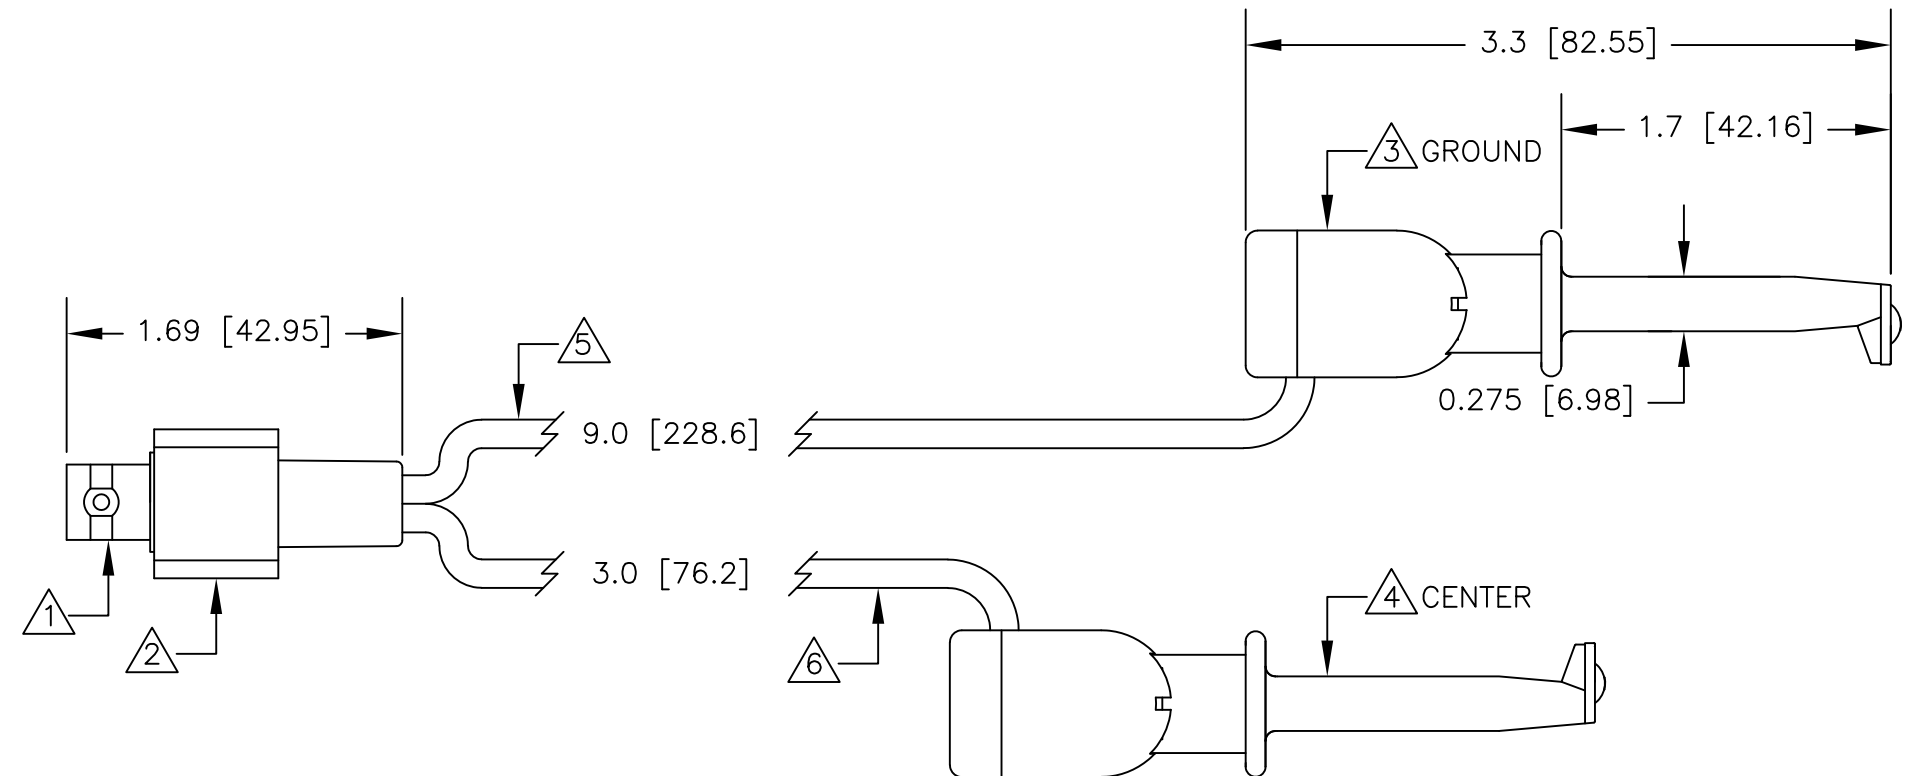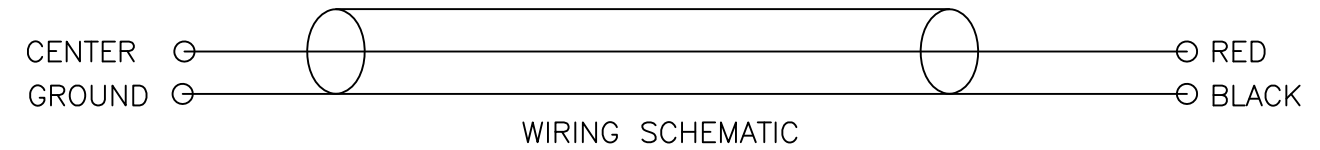

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN	R.L.	DESCRIPTION BNC FEMALE BREAKOUT TO 18AWG XH MACROHOOK LEADS
			APPROVED BY		
		FINISH SEE NOTE.			SIZE
NEXT ASSY	USED ON				CODE IDENT NO.
APPLICATION		DO NOT SCALE DRAWING			DRAWING NO.
					REV.
					B 08505
					1001XH
					SCALE
					1:1
					SHEET 1 OF 1