

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230
 BODY & FITTINGS: BRASS. NICKEL PLATED.
 PIN: BRASS. GOLD PLATED.
 DIELECTRIC: PTFE.

2. P/N: 0480 & P/N: 0148/0 & P/N: 0581
 HOUSING: BLK MOLDED DELRIN
 CONTACT: GOLD PLATED BeCu
 HEAT SHRINK: BLK HEAT SHRINK



3. P/N: X100WBLK
 HOUSING: BLK MOLDED NYLON.
 CONTACT: GOLD PLATED BeCu.
 SPRING: STAINLESS STEEL.

4. P/N: XL2RED
 HOUSING: RED MOLDED NYLON.
 CONTACT: GOLD PLATED BeCu.
 SPRING: STAINLESS STEEL.

5. P/N: W-500/0
 20AWG TINNED COPPER STRANDING
 0.080 [2.03] O.D. PVC INSULATION

6. P/N: W-500/2
 20AWG TINNED COPPER STRANDING
 0.080 [2.03] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

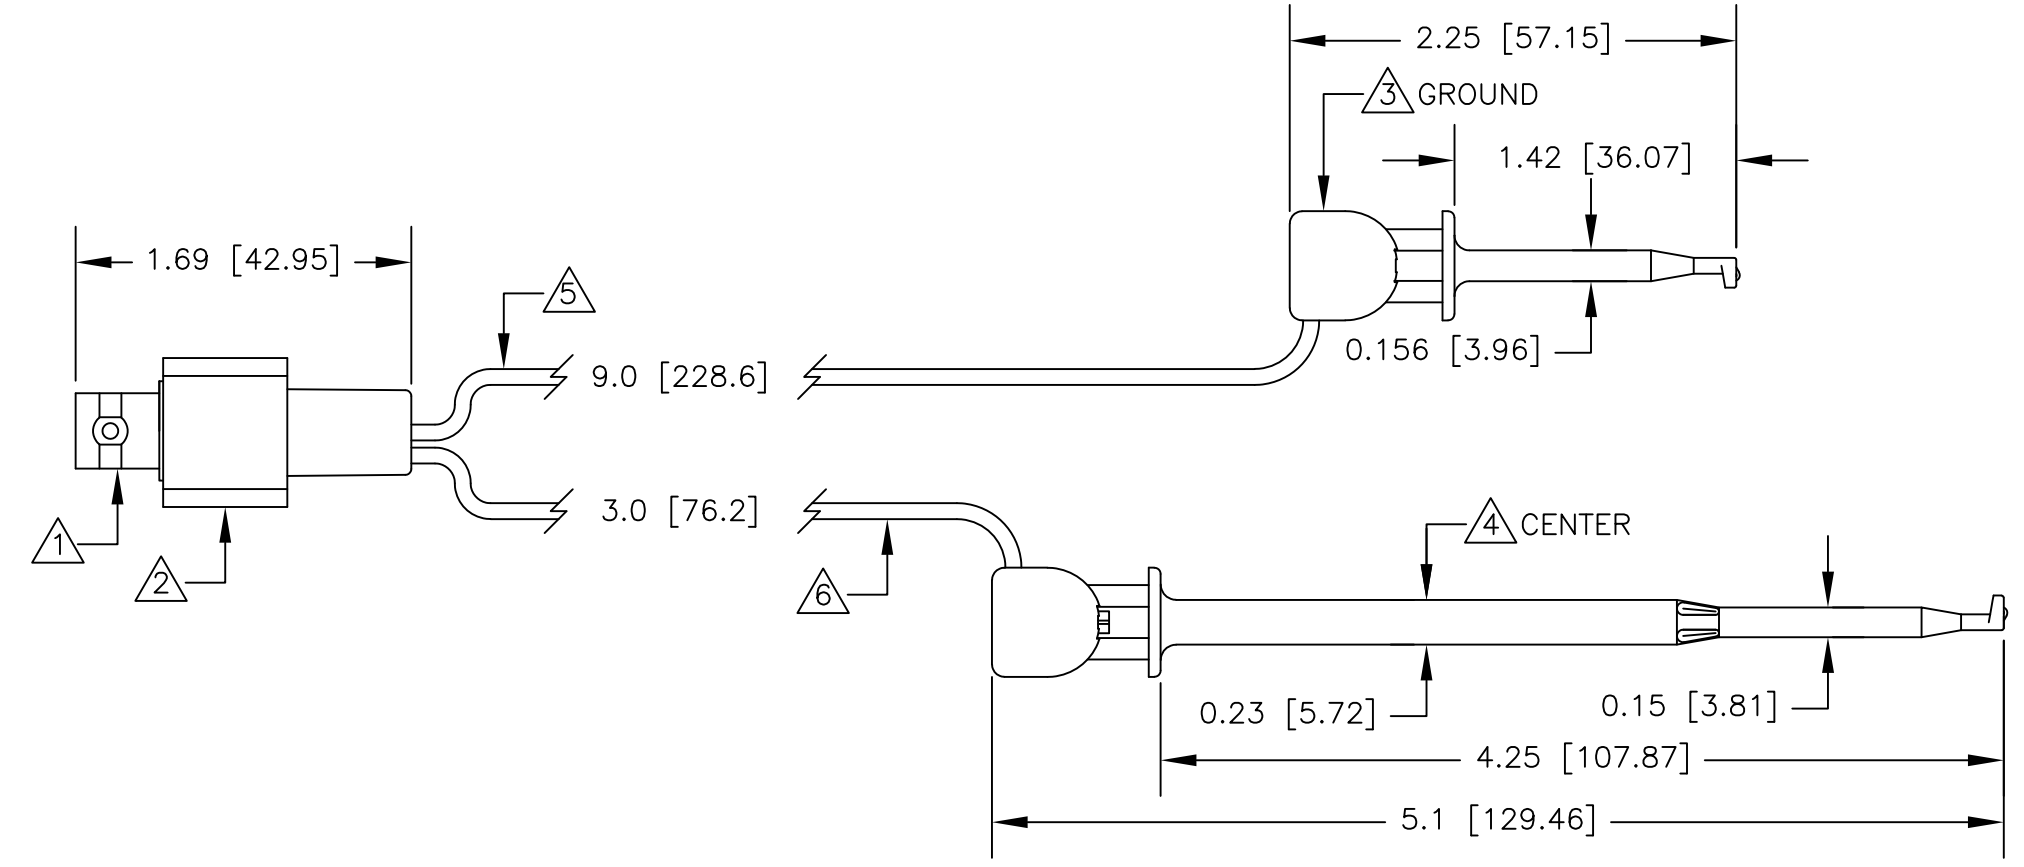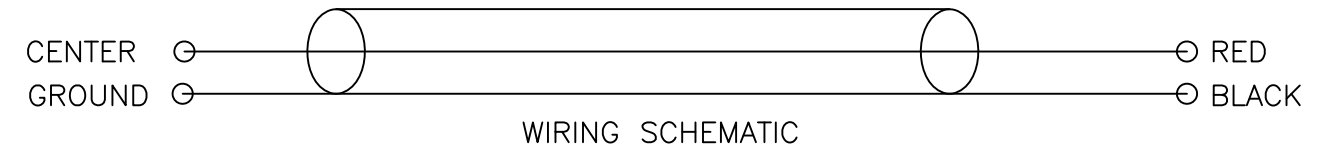

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN	R.L.	4/19
			APPROVED BY		
		FINISH SEE NOTE.	DESCRIPTION		BNC FEMALE BREAKOUT TO XL2/X100W MINIHOOK LEADS
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.	
APPLICATION		DO NOT SCALE DRAWING	B	08505	1001XL2
			SCALE	1:1	SHEET 1 OF 1