
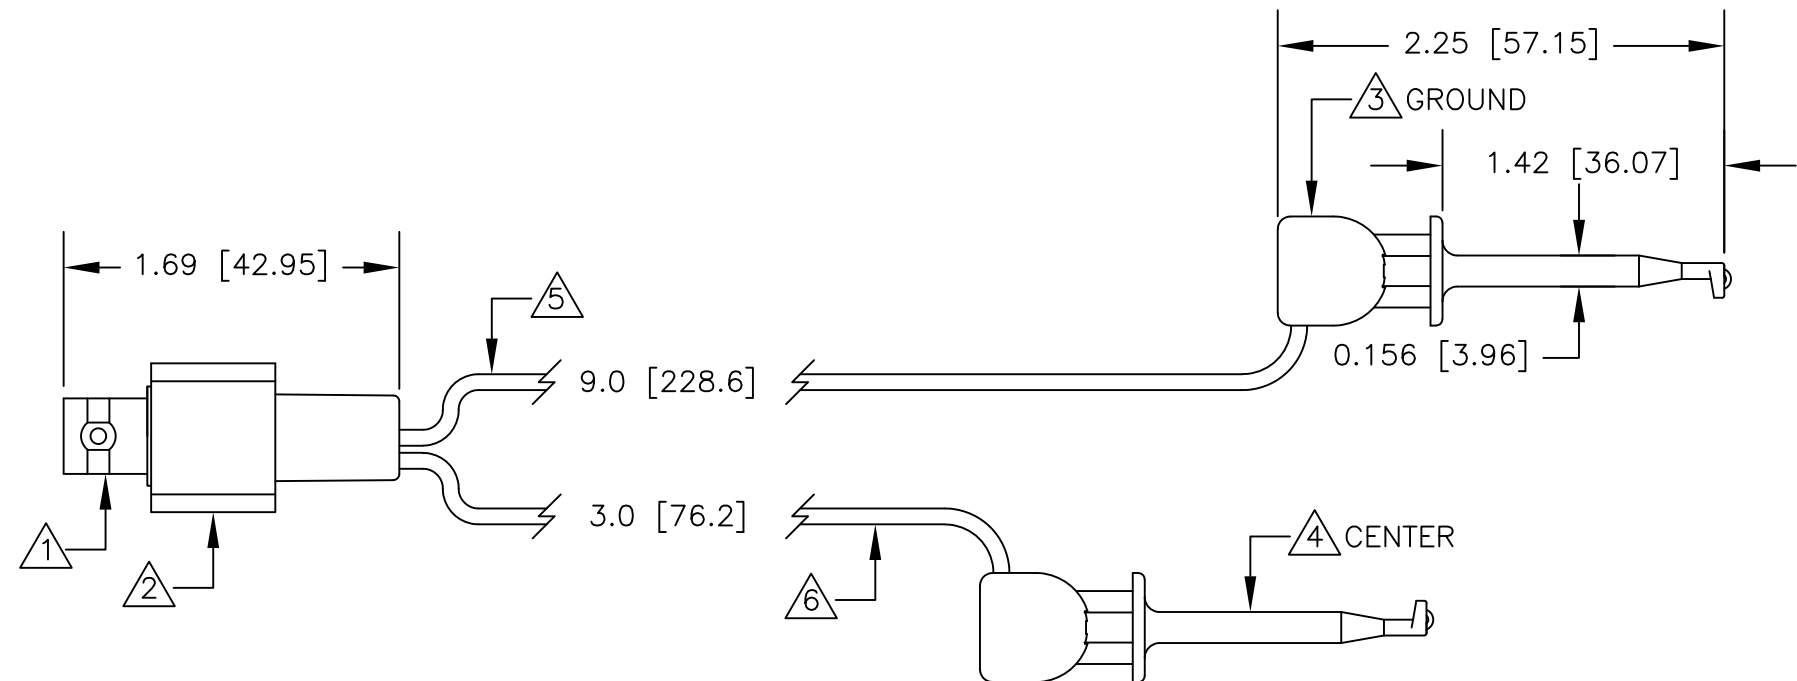


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230  
BODY & FITTINGS: BRASS. NICKEL PLATED.  
PIN: BRASS. GOLD PLATED.  
DIELECTRIC: PTFE.
2. P/N: 0480 & P/N: 0148/0 & P/N: 0581  
HOUSING: BLK MOLDED DELRIN  
CONTACT: GOLD PLATED BeCu  
HEAT SHRINK: BLK HEAT SHRINK
3. P/N: XRBLK  
HOUSING: BLK MOLDED NYLON.  
CONTACT: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
4. P/N: XRRED  
HOUSING: RED MOLDED NYLON.  
CONTACT: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
5. P/N: W-500/0  
20AWG TINNED COPPER STRANDING  
0.080 [2.03] O.D. PVC INSULATION
6. P/N: W-500/2  
20AWG TINNED COPPER STRANDING  
0.080 [2.03] O.D. PVC INSULATION

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

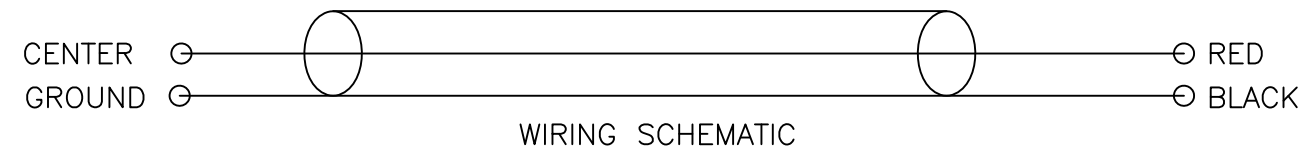

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div>E-Z-HOOK! DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div>						
			APPROVALS	DATE							
				DRAWN	R.L.	4/19	DESCRIPTION BNC FEMALE BREAKOUT TO XR MINIHOO K LEADS				
		MATERIAL SEE NOTE.	APPROVED BY								
		FINISH SEE NOTE.					SIZE	CODE IDENT NO.	DRAWING NO.	REV.	
NEXT ASSY	USED ON						B	08505	1001XR		
APPLICATION		DO NOT SCALE DRAWING					SCALE		1:1	SHEET 1 OF 1	