
REVISIONS DESCRIPTION LTR NOTES: UNLESS OTHERWISE SPECIFIED 1. P/N: 9230 BODY & FITTINGS: BRASS. NICKEL PLATED. PIN: BRASS. GOLD PLATED. DIELECTRIC: PTFE. 2. P/N: 0480 & P/N: 0148/0 & P/N: 0581 HOUSING: BLK MOLDED DELRIN CONTACT: GOLD PLATED BeCu HEAT SHRINK: BLK HEAT SHRINK 3. P/N: 9202BLK HOUSING: BLK MOLDED NYLON. FRAME: NICKEL PLATED BRASS. CENTER O O RED CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE. GROUND O O BLACK WIRING SCHEMATIC 4. P/N: 9202RED HOUSING: RED MOLDED NYLON. FRAME: NICKEL PLATED BRASS. CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE. 5. P/N: W-500/0 20AWG TINNED COPPER STRANDING 0.080 [2.03] O.D. PVC INSULATION 6. P/N: W-500/2 20AWG TINNED COPPER STRANDING 1.475 [37.47] 0.080 [2.03] O.D. PVC INSULATION $-\sqrt{3}$ GROUND – 0.175 [4.45] **→** 1.69 [42.95] **→**

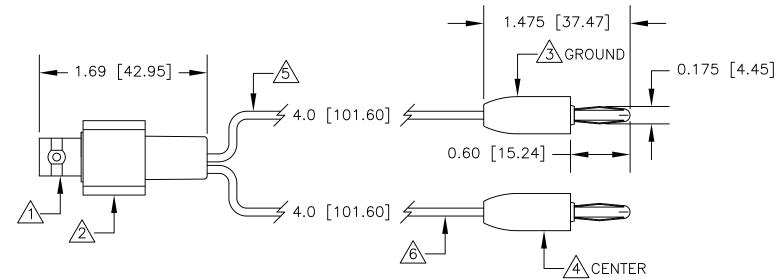

		DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		DRAWN			E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. DESCRIPTION				
				APPROVED B	R.L. Y	4/19	BNC FEMALE BREAKOUT TO 4" 9202 STD BAN PLUG LEADS				
NEXT ASSY	USED ON	FINISH SEE NOTE.						CODE IDENT NO. D			REV.
APPLICATION		DO NOT SCALE DRAWIN	G				SCALE	1:1		SHEET 1 OF 1	

DATE

APPROVED