
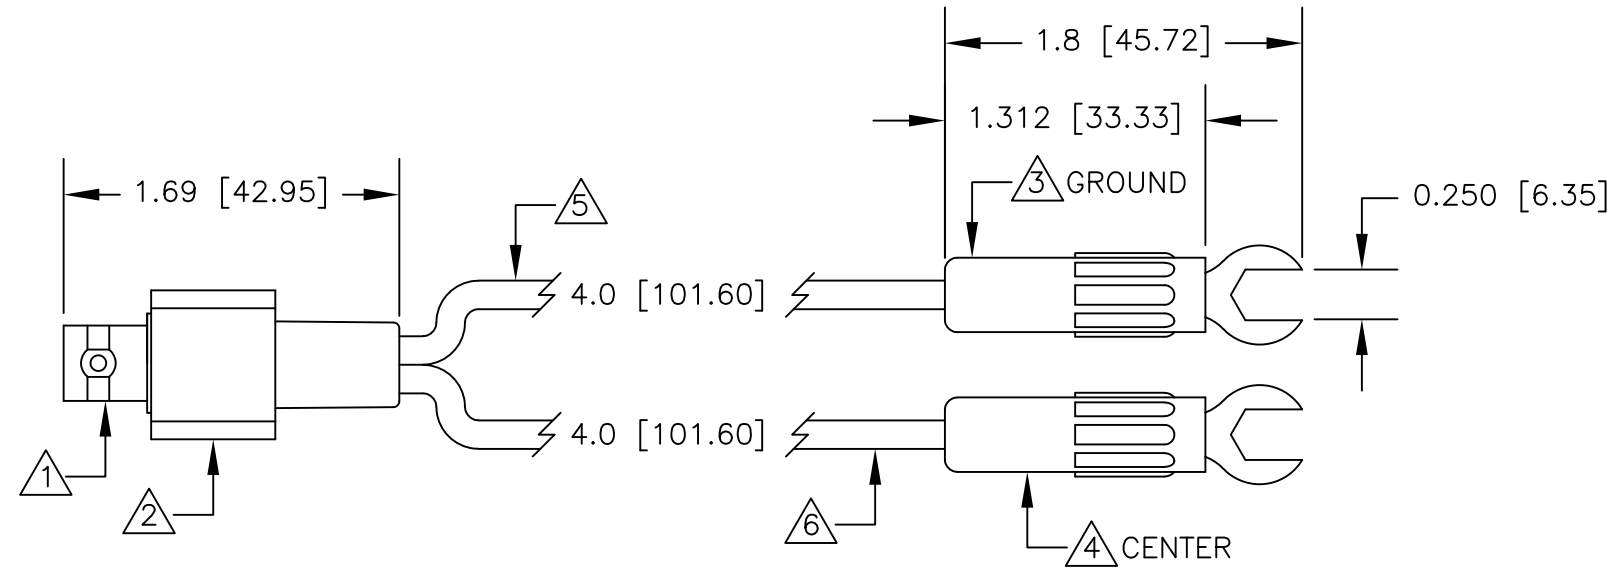


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230
BODY & FITTINGS: BRASS. NICKEL PLATED.
PIN: BRASS. GOLD PLATED.
DIELECTRIC: PTFE.
2. P/N: 0482 & P/N: 0148/0 & P/N: 0581
HOUSING: BLK MOLDED DELRIN
CONTACT: GOLD PLATED BeCu
HEAT SHRINK: BLK HEAT SHRINK
3. P/N: 9208BLK
HOUSING: BLK MOLDED ACETAL.
TERMINAL: NICKEL PLATED BRASS.
4. P/N: 9208RED
HOUSING: RED MOLDED ACETAL.
TERMINAL: NICKEL PLATED BRASS.
5. P/N: W-600/0
18AWG TINNED COPPER STRANDING
0.144 [3.66] O.D. PVC INSULATION
6. P/N: W-600/2
20AWG TINNED COPPER STRANDING
0.144 [3.66] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

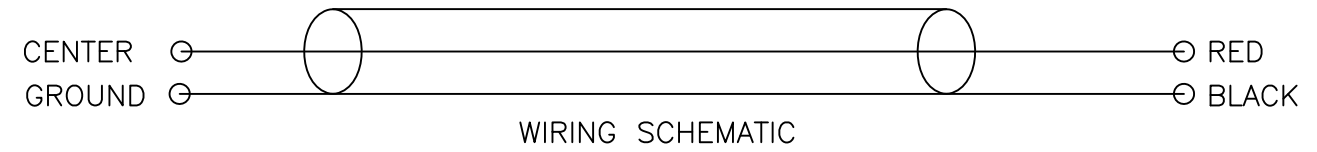

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	4/19	DESCRIPTION BNC FEMALE BREAKOUT TO 4" 9208 .250" SPADE LUG LEADS
		FINISH SEE NOTE.	APPROVED BY		SIZE CODE IDENT NO. DRAWING NO. REV. B 08505 1007-25
NEXT ASSY	USED ON				SCALE 1:1 SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			