

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230
BODY & FITTINGS: BRASS. NICKEL PLATED.
PIN: BRASS. GOLD PLATED.
DIELECTRIC: PTFE.



2. P/N: 0480 & P/N: 0148/0 & P/N: 0581
HOUSING: BLK MOLDED DELRIN
CONTACT: GOLD PLATED BeCu
HEAT SHRINK: BLK HEAT SHRINK

3. P/N: 9209
HOUSING: RED VINYL PLASTIC.
TERMINAL: TIN PLATED COPPER

4. P/N: W-500/0
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION

5. P/N: W-500/2
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

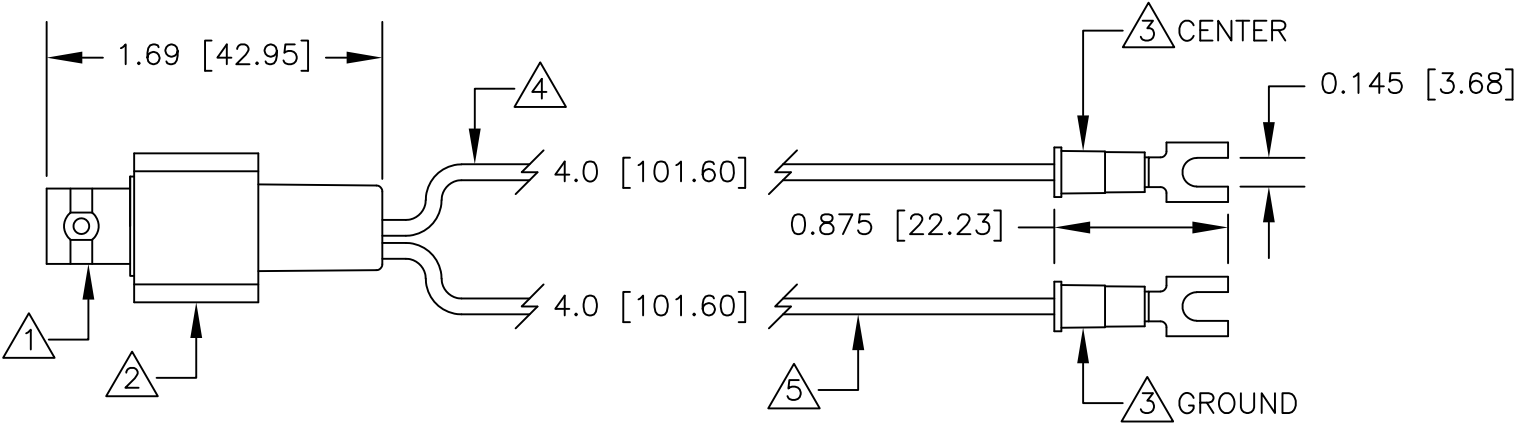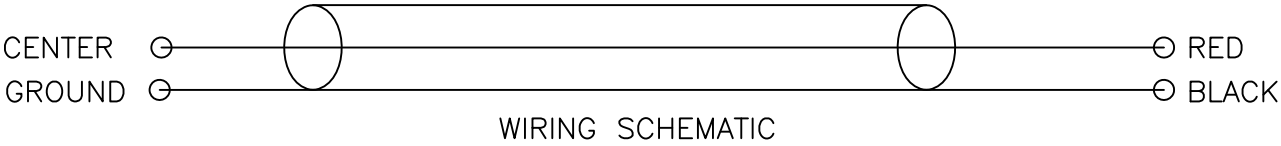

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK ® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
			APPROVALS	DATE				
			DRAWN R.L.	4/19				
		MATERIAL SEE NOTE.	APPROVED BY		DESCRIPTION BNC FEMALE BREAKOUT TO 4” 9209 .140” SPADE LUG LEADS			
		FINISH SEE NOTE.			SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON				B	08505	1007-6	
APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1		SHEET 1 OF 1