
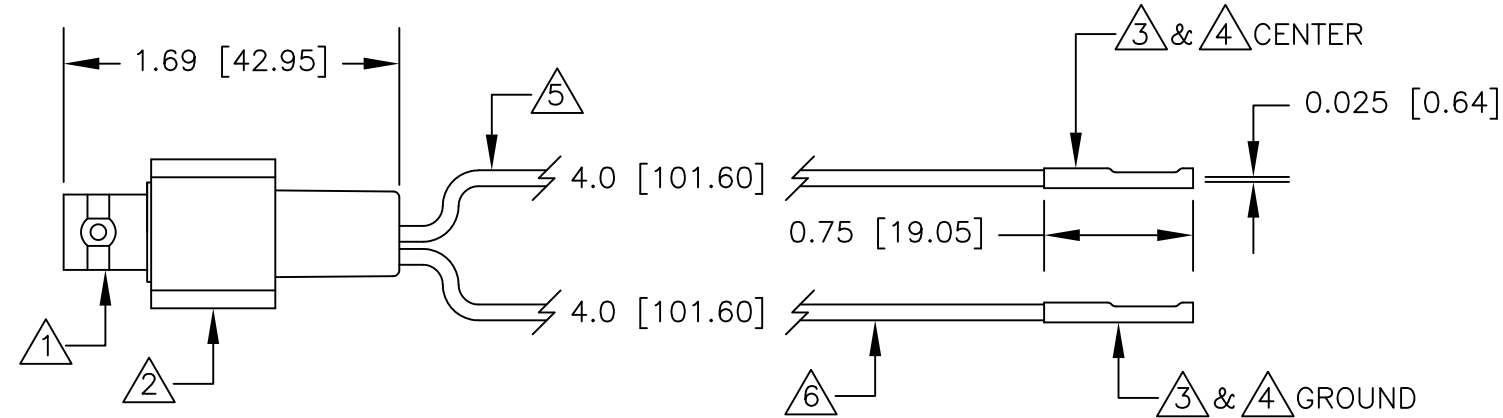


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230
BODY & FITTINGS: BRASS. NICKEL PLATED.
PIN: BRASS. GOLD PLATED.
DIELECTRIC: PTFE.
2. P/N: 0480 & P/N: 0148/0 & P/N: 0581
HOUSING: BLK MOLDED DELRIN
CONTACT: GOLD PLATED BeCu
HEAT SHRINK: BLK HEAT SHRINK
3. P/N: 0202
BODY: NICKEL UNDERPLATED BRASS.
CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.
GOLD FLASH BeCu SPRING.
4. P/N: 0148/0
INSULATOR: HEAT SHRINK TUBING. BLACK.
5. P/N: W-500/0
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION
6. P/N: W-500/2
20AWG TINNED COPPER STRANDING
0.080 [2.03] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

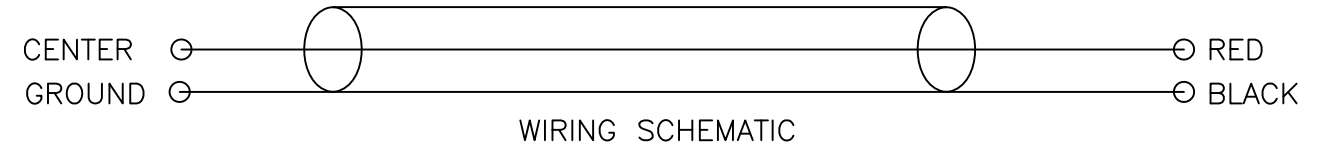

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	4/19	DESCRIPTION BNC FEMALE BREAKOUT TO 4" .025 SQ SKT LEADS
		FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				SIZE B CODE IDENT NO. 08505 DRAWING NO. 1008 REV.
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1