
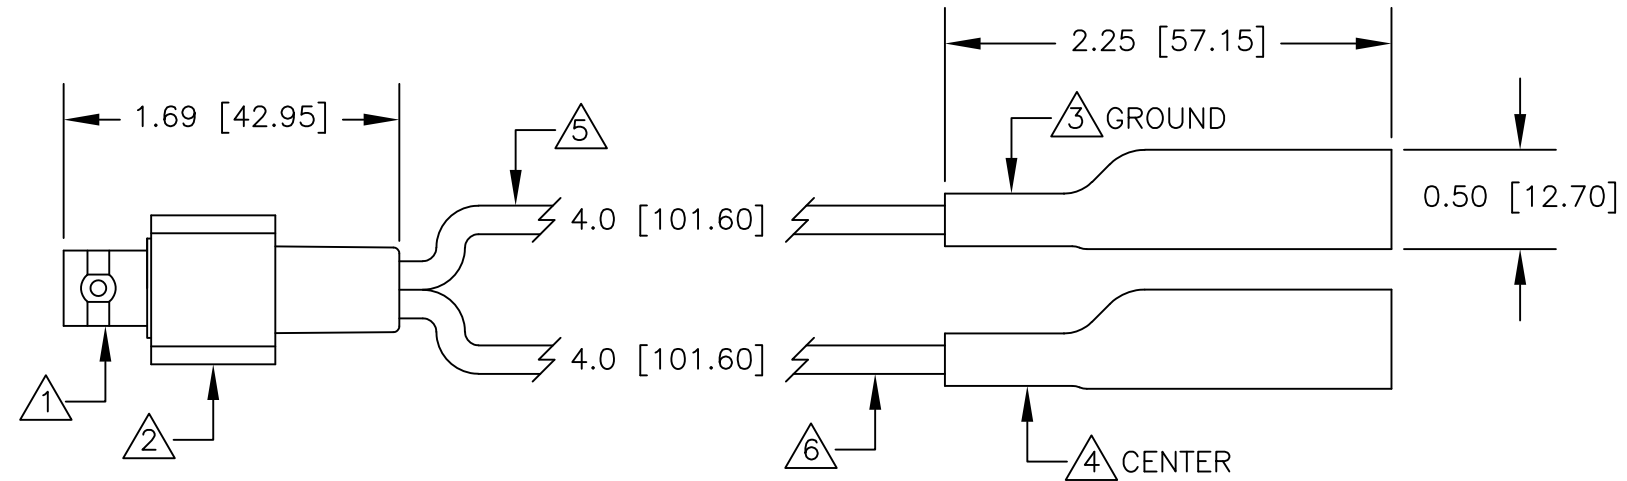


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9230
 BODY & FITTINGS: BRASS. NICKEL PLATED.
 PIN: BRASS. GOLD PLATED.
 DIELECTRIC: PTFE.
2. P/N: 0482 & P/N: 0148/0 & P/N: 0581
 HOUSING: BLK MOLDED DELRIN
 CONTACT: GOLD PLATED BeCu
 HEAT SHRINK: BLK HEAT SHRINK
3. P/N: 9274BLK
 INSULATOR: BLK MOLDED PVC.
 ALLIGATOR: NICKEL PLATED STEEL.
4. P/N: 9274RED
 INSULATOR: RED MOLDED PVC.
 ALLIGATOR: NICKEL PLATED STEEL.
5. P/N: W-600/0
 18AWG TINNED COPPER STRANDING
 0.144 [3.66] O.D. PVC INSULATION
6. P/N: W-600/2
 20AWG TINNED COPPER STRANDING
 0.144 [3.66] O.D. PVC INSULATION

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

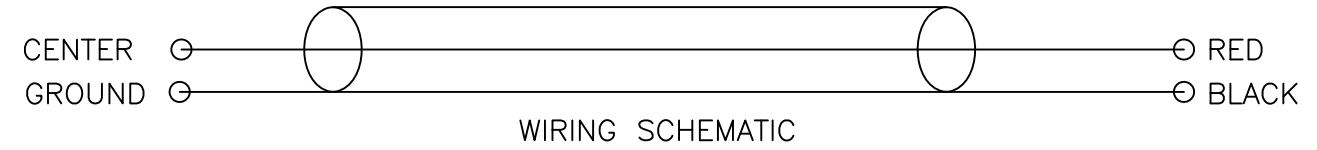

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	4/19	DESCRIPTION BNC FEMALE BREAKOUT TO 4" 9274 STD GATOR LEADS
		FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				SIZE B CODE IDENT NO. 08505 DRAWING NO. 1009 REV.
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1