NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: 9230
BODY & FITTINGS: BRASS. NICKEL PLATED.
PIN: BRASS. GOLD PLATED.
DIELECTRIC: PTFE.

2. P/N: 0482 & P/N: 0148/0 & P/N: 0581 HOUSING: BLK MOLDED DELRIN CONTACT: GOLD PLATED BeCu HEAT SHRINK: BLK HEAT SHRINK

3. P/N: W-600/0 18AWG TINNED COPPER STRANDING 0.144 [3.66] O.D. PVC INSULATION

4. P/N: W-600/2 18AWG TINNED COPPER STRANDING 0.144 [3.66] O.D. PVC INSULATION



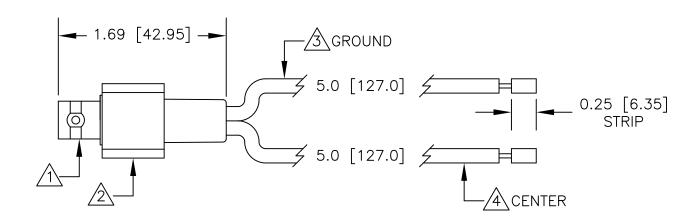

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO. APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
		± .XX ± ± .XXX ±	DRAWN R.L.	4/19	DESCRIPTION
		material SEE NOTE.	APPROVED BY		BNC FEMALE BREAKOUT TO 5" 18AWG LEADS ONLY
		FINISH			SIZE CODE IDENT NO. DRAWING NO. REV.
NEXT ASSY	USED ON	SEE NOTE.			B 08505 1015-F
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1