
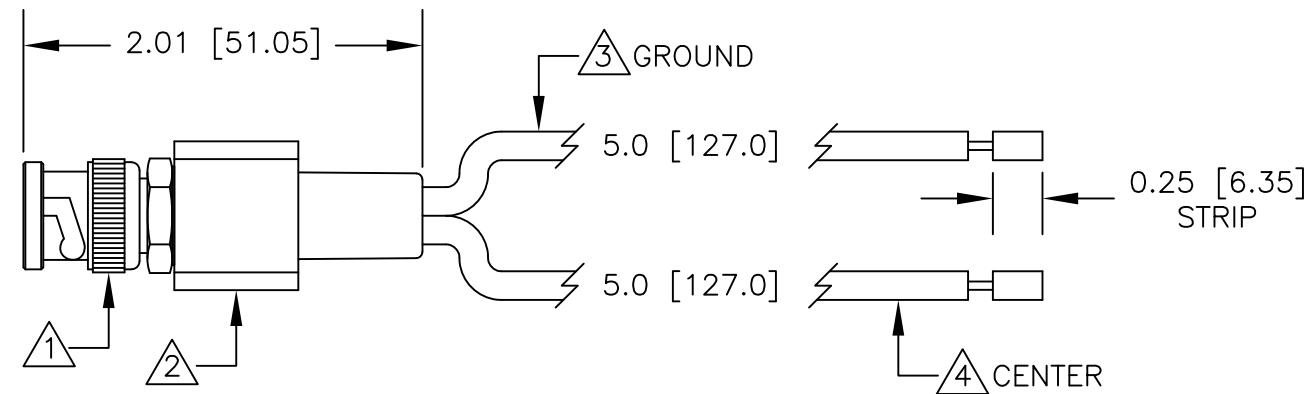


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9267-0002 & 0344  
 BODY & FITTINGS: NICKEL PLATED BRASS  
 CONTACT: GOLD PLATED BRASS.  
 DIELECTRIC: PTFE  
 SPRING: NICKEL PLATED SK5  
 GASKET: RED RUBBER  
 WASHER: COPPER, TIN, NICKEL PLATED CSR
2. P/N: 0482 & P/N: 0148/0 & P/N: 0581  
 HOUSING: BLK MOLDED DELRIN  
 CONTACT: GOLD PLATED BeCu  
 HEAT SHRINK: BLK HEAT SHRINK
3. P/N: W-600/0  
 18AWG TINNED COPPER STRANDING  
 0.144 [3.66] O.D. PVC INSULATION
4. P/N: W-600/2  
 18AWG TINNED COPPER STRANDING  
 0.144 [3.66] O.D. PVC INSULATION

LTR	DESCRIPTION	REVISIONS	
		DATE	APPROVED

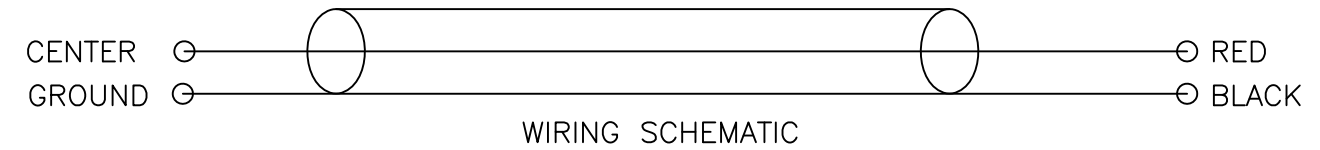

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	4/19	DESCRIPTION BNC MALE BREAKOUT TO 5" 18AWG LEADS ONLY
		FINISH SEE NOTE.	APPROVED BY		SIZE CODE IDENT NO. DRAWING NO. REV. B 08505 1015M
NEXT ASSY	USED ON				SCALE 1:1 SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			