NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XRCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.

2. P/N: 9203COLOR

HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.

FRAME: NICKEL PLATED BRASS.

CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.

3. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.


4. PERFORMANCE:

MAXIMUM CURRENT: 2.5 AMPS

MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC

HANDS FREE: 1000 W.V.D.C.

MAXIMUM TEMPERATURE: 176°F (80°C)

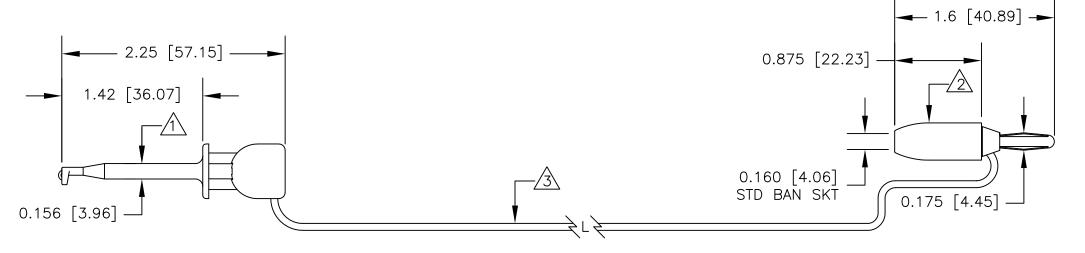

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO.	L D 4 M D	E	Z-HO(DK division o	F TEKTEST INC.	
		± .XX ± ± .XXX ±	DRAWN R.L.	5/13	DESCRIP	TION		/\/\\\\	
		material SEE NOTE.	APPROVED BY		MINI—HOOK (XR) To stk ban plug (920				3)
		FINISH			l l	DDE IDENT NO.			REV.
NEXT ASSY	USED ON	SEE NOTE.			B C)8505	201XR		
APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1		SHEET 1 OF 1	