


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XM-COLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
2. P/N: 9204-COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: NICKEL PLATED BRASS
3. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE:
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

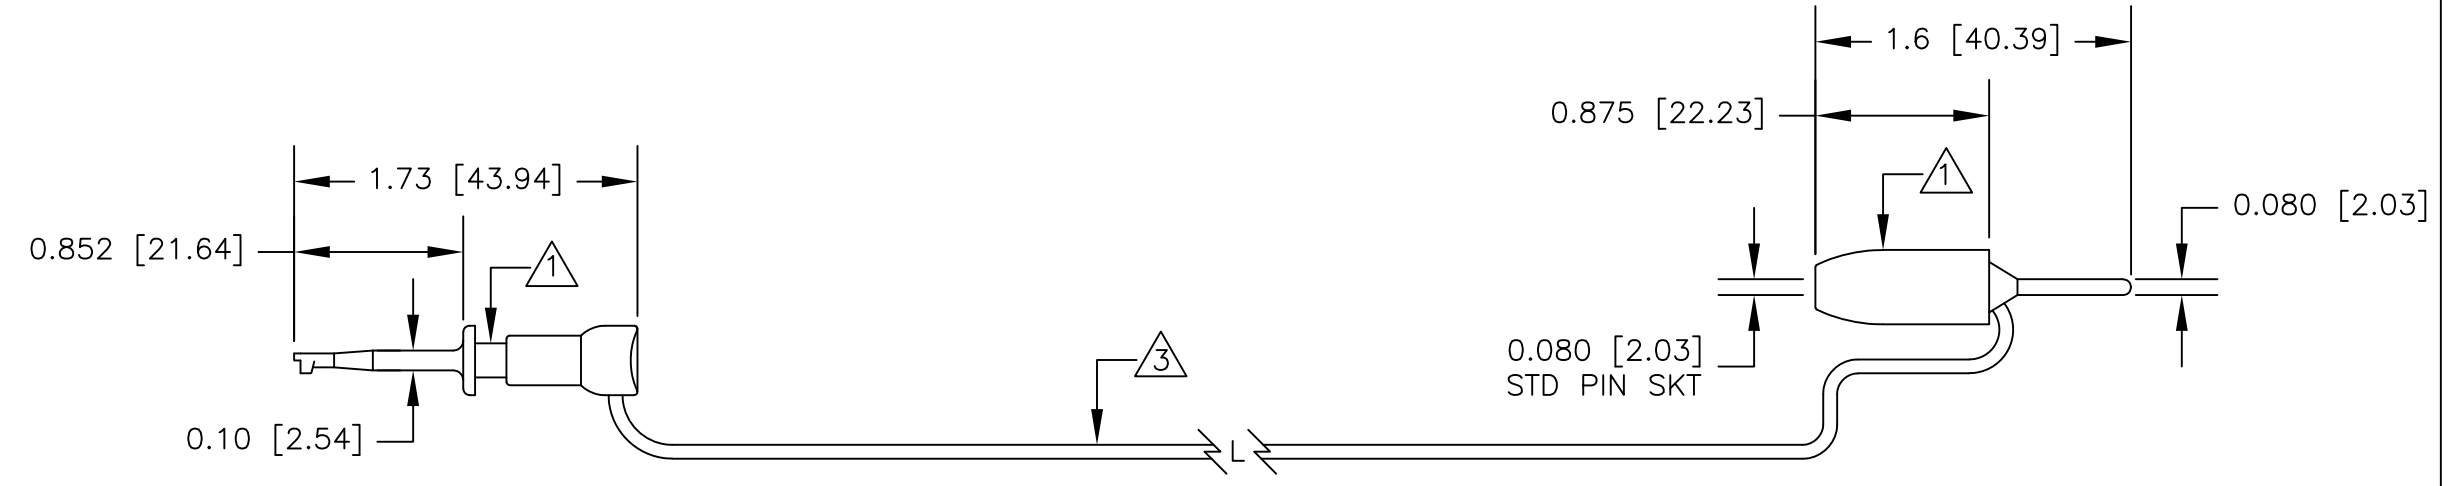

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
MATERIAL SEE NOTE.		APPROVALS	DATE				
FINISH SEE NOTE.		DRAWN	R.L.	5/13	DESCRIPTION MICRO-HOOK (XM) TO STD STK PIN PLUG (9204)		
NEXT ASSY		APPROVED BY		SIZE		CODE IDENT NO.	
APPLICATION		DO NOT SCALE DRAWING		B	08505	DRAWING NO.	REV.
				SCALE	1:1	202XM	
						SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.