

NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: X100WCOLOR
 HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 CONTACT BLADE: GOLD PLATED BeCu.
 SPRING: STAINLESS STEEL.

2. P/N: 9206COLOR
 HOUSING: MOLDED ABS. AVAILABLE IN BLK OR RED
 FRAME: NICKEL PLATED BRASS.
 CONTACT: NICKEL PLATED BeCu.
 HARDWARE: SS SCREW & NUT

3. P/N: W-200/COLOR
 22AWG TINNED COPPER
 0.070 [1.78] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.

4. PERFORMANCE
 MAXIMUM CURRENT: 2.5 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 1000 W.V.D.C.
 MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

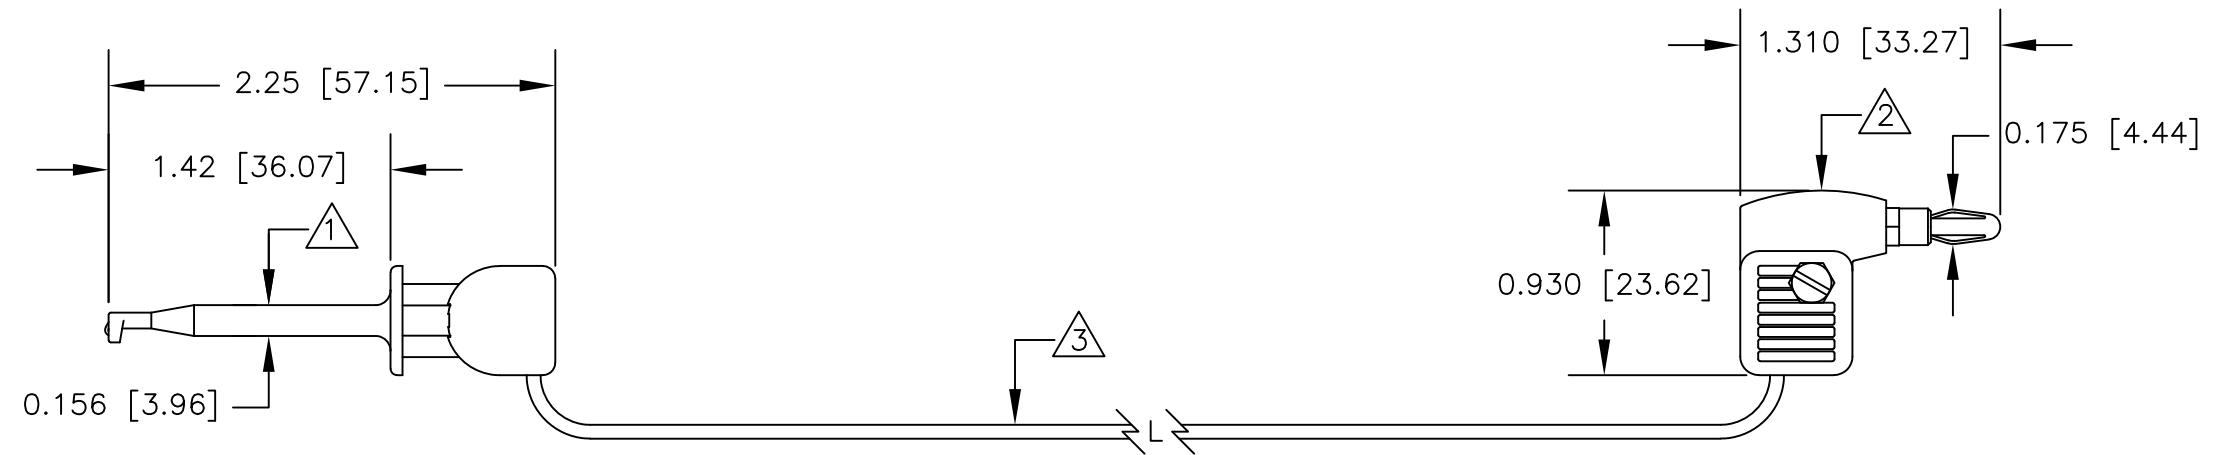

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			APPROVED BY			
		FINISH SEE NOTE.	DESCRIPTION		MINI-HOOK (X100W) TO METER BAN PLUG (9206)	
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.		DRAWING NO.
APPLICATION		DO NOT SCALE DRAWING	B	08505	205W	
			SCALE	1:1		SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
 MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.