

NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: XKCOLOR  
 HOUSING & PLUNGER: GLASS FILLED CELCON. AVAILABLE IN TEN COLORS.  
 CONTACT BLADE: STAINLESS STEEL.  
 SPRING: STAINLESS STEEL.

2. P/N: 9206COLOR  
 HOUSING: MOLDED ABS. AVAILABLE IN BLK OR RED  
 FRAME: NICKEL PLATED BRASS.  
 CONTACT: NICKEL PLATED BeCu.  
 HARDWARE: SS SCREW & NUT

3. P/N: W-200/COLOR  
 22AWG TINNED COPPER  
 0.070 [1.78] O.D. PVC INSULATION  
 AVAILABLE IN TEN COLORS.

4. PERFORMANCE  
 MAXIMUM CURRENT: 2.5 AMPS  
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
 HANDS FREE: 1000 W.V.D.C.  
 MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

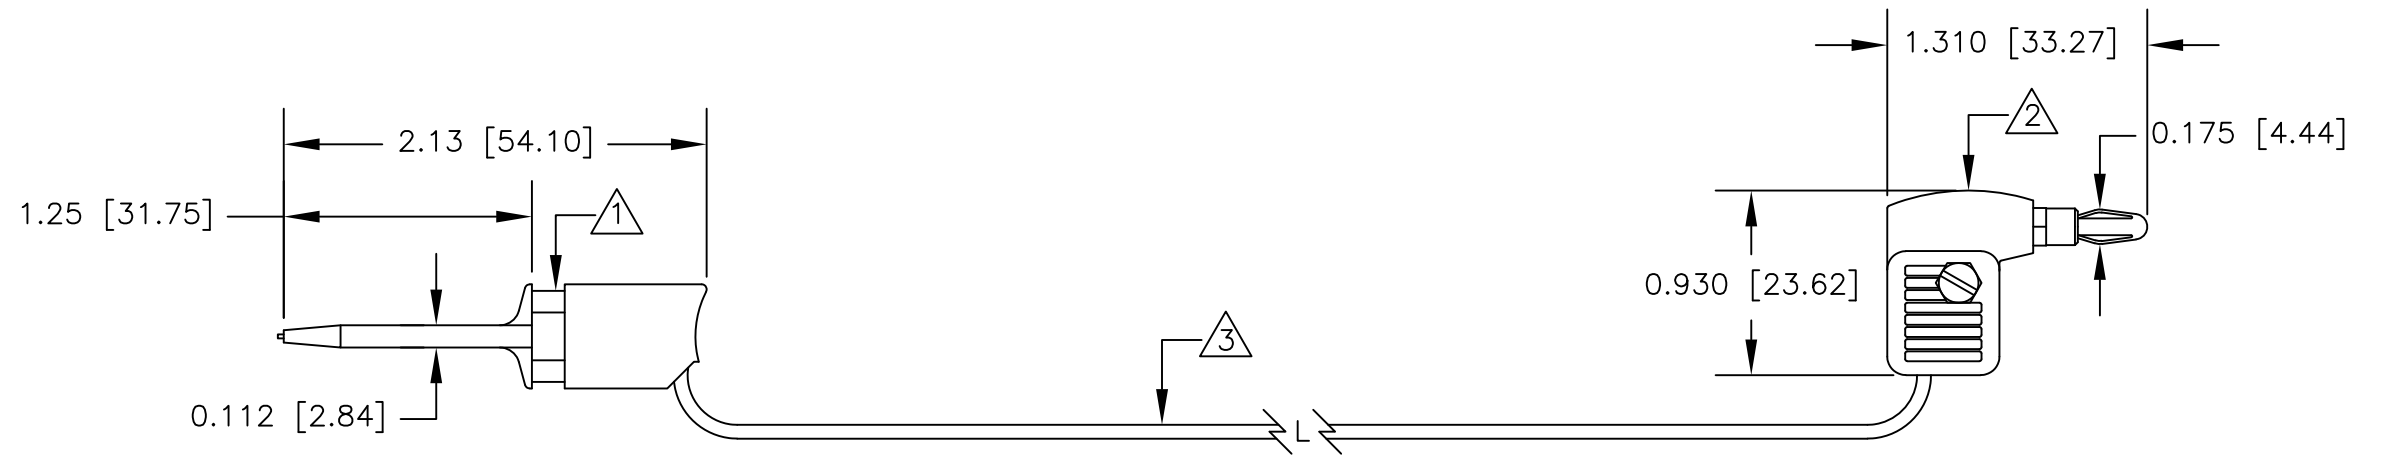

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L.	5/13	DESCRIPTION MICRO-HOOK (XK) TO METER BAN PLUG (9206)
		FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				SIZE CODE IDENT NO. DRAWING NO. REV. <b>B 08505 205XK</b>
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1