


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR  
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
2. P/N: 9210COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
END CAP: MACHINED DELRIN. WHITE.  
FRAME: NICKEL PLATED BRASS.
3. P/N: W-200/COLOR  
22AWG TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE:  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

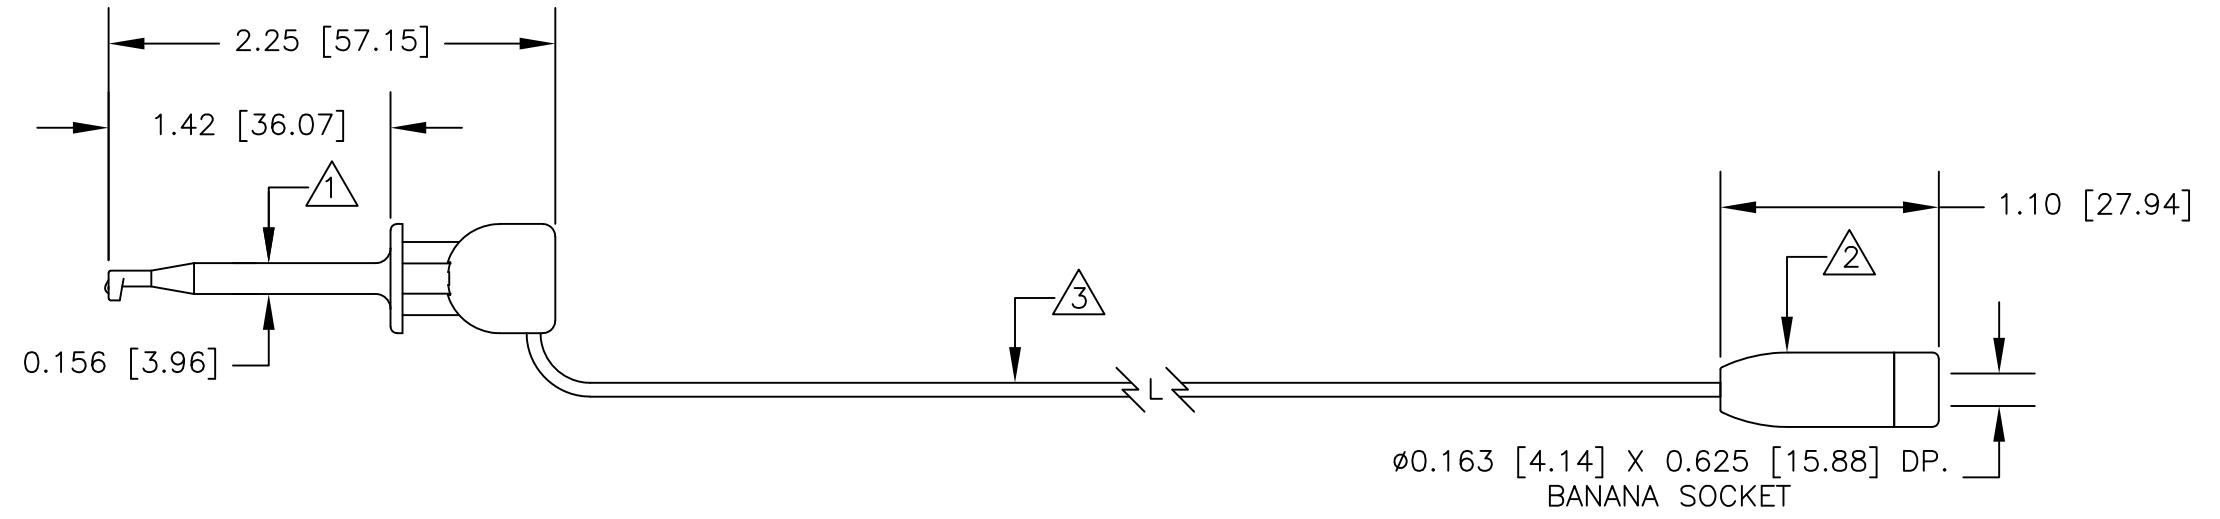

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
		MATERIAL SEE NOTE.		APPROVALS	DATE		
		FINISH SEE NOTE.		DRAWN	R.L.	5/13	DESCRIPTION MINI-HOOK (X100W) TO STD BAN SKT (9210)
NEXT ASSY	USED ON	DO NOT SCALE DRAWING		APPROVED BY			
APPLICATION				SIZE	CODE IDENT NO.	DRAWING NO.	REV.
				B	08505	210W	
				SCALE	1:1		SHEET 1 OF 1