


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
2. P/N: 9211COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: SILVER PLATED BRASS.
CONTACT: SILVER PLATED BeCU.

3. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE:
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

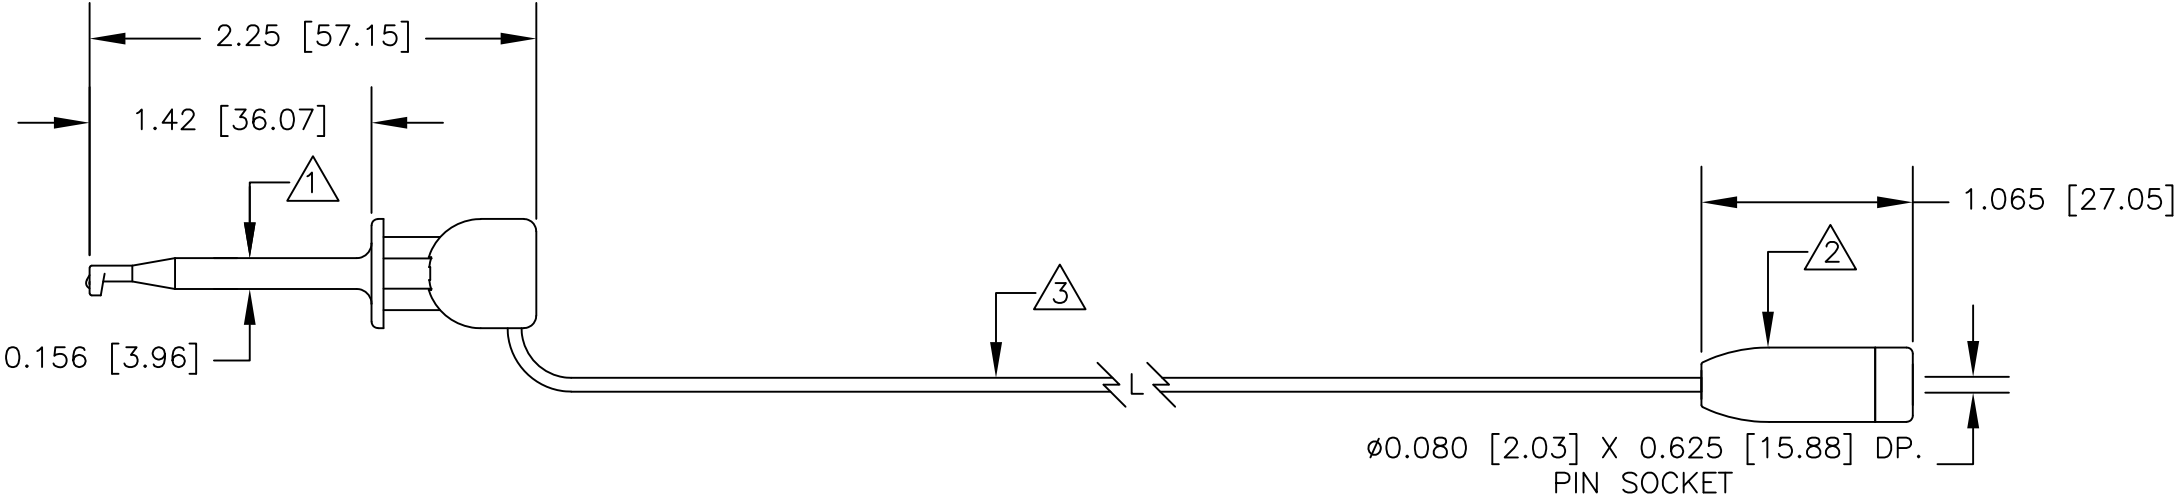

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div>E-Z-HOOK! DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div>				
			APPROVALS	DATE	DESCRIPTION MINI-HOOK (X100W) TO STD TIP SKT (9211)				
			DRAWN R.L.	5/13					
		MATERIAL SEE NOTE.	APPROVED BY		SIZE	CODE IDENT NO.	DRAWING NO.	REV.	
		FINISH SEE NOTE.			B	08505	211W		
NEXT ASSY	USED ON				SCALE		1:1		SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING							