


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XL1COLOR  
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
2. P/N: 9212COLOR  
INSULATOR: HEAT SHRINK TUBING. BLK  
CONTACT: TIN PLATED STEEL.
3. P/N: W-200/COLOR  
22AWG TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE:  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

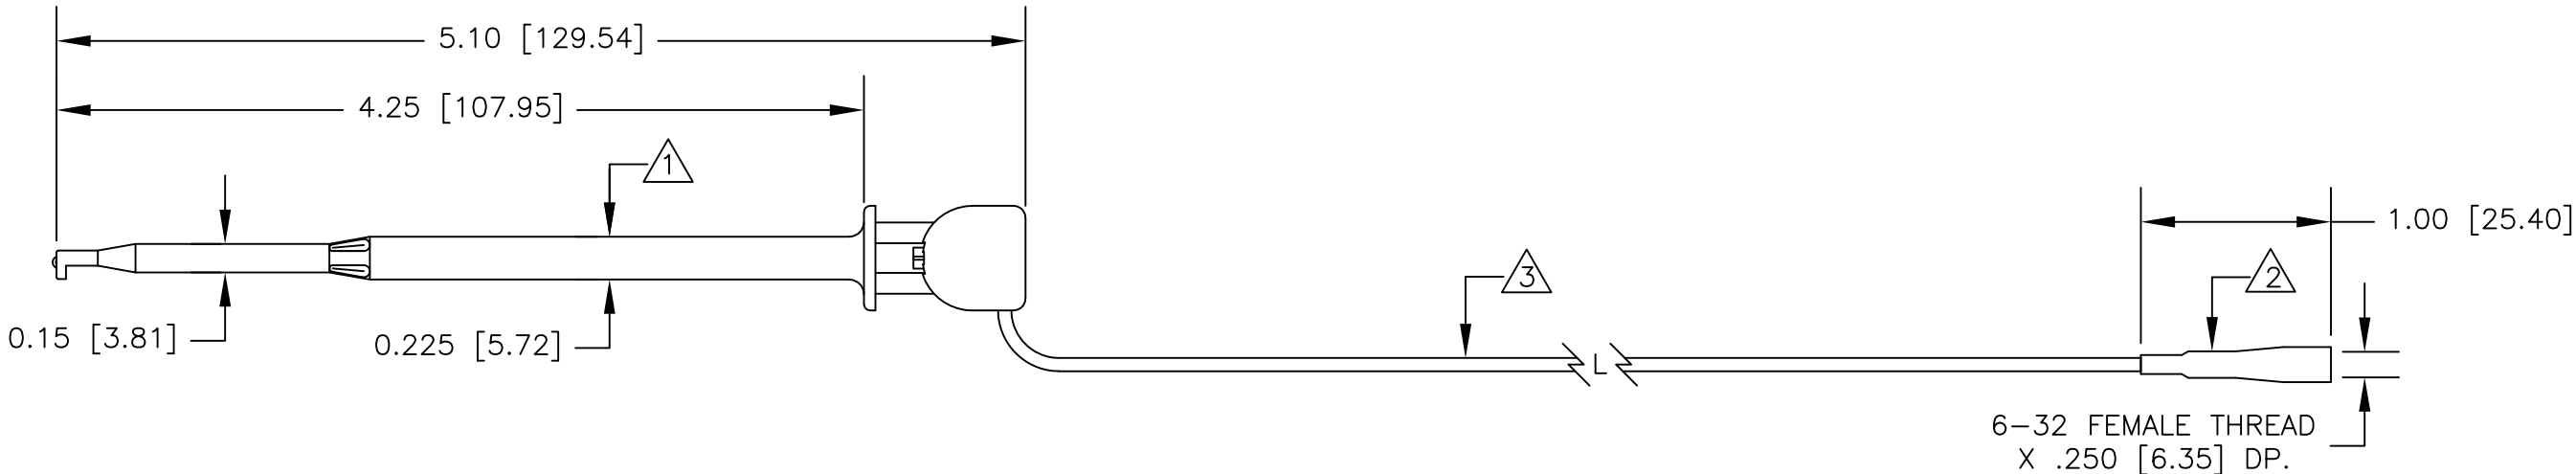

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div><div>E-Z-HOOK®</div><div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div></div>			
			APPROVALS	DATE	DESCRIPTION			
			DRAWN R.L.	5/13				
		MATERIAL SEE NOTE.	APPROVED BY		MINI-HOOK (XL1) TO FEMALE 6-32 THREAD (9212)			
		FINISH SEE NOTE.			SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON				B	08505	212XL1	
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1		SHEET 1 OF 1	