


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XM-COLOR  
 HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
 CONTACT BLADE: GOLD PLATED BeCu.  
 SPRING: STAINLESS STEEL.
2. P/N: 9212-COLOR  
 INSULATOR: BLK HEAT SHRINK TUBING.  
 CONTACT: TIN PLATED STEEL.
3. P/N: W-200/COLOR  
 22AWG TINNED COPPER  
 0.070 [1.78] O.D. PVC INSULATION  
 AVAILABLE IN TEN COLORS.
4. PERFORMANCE:  
 MAXIMUM CURRENT: 2.5 AMPS  
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
                           HANDS FREE: 1000 W.V.D.C.  
 MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

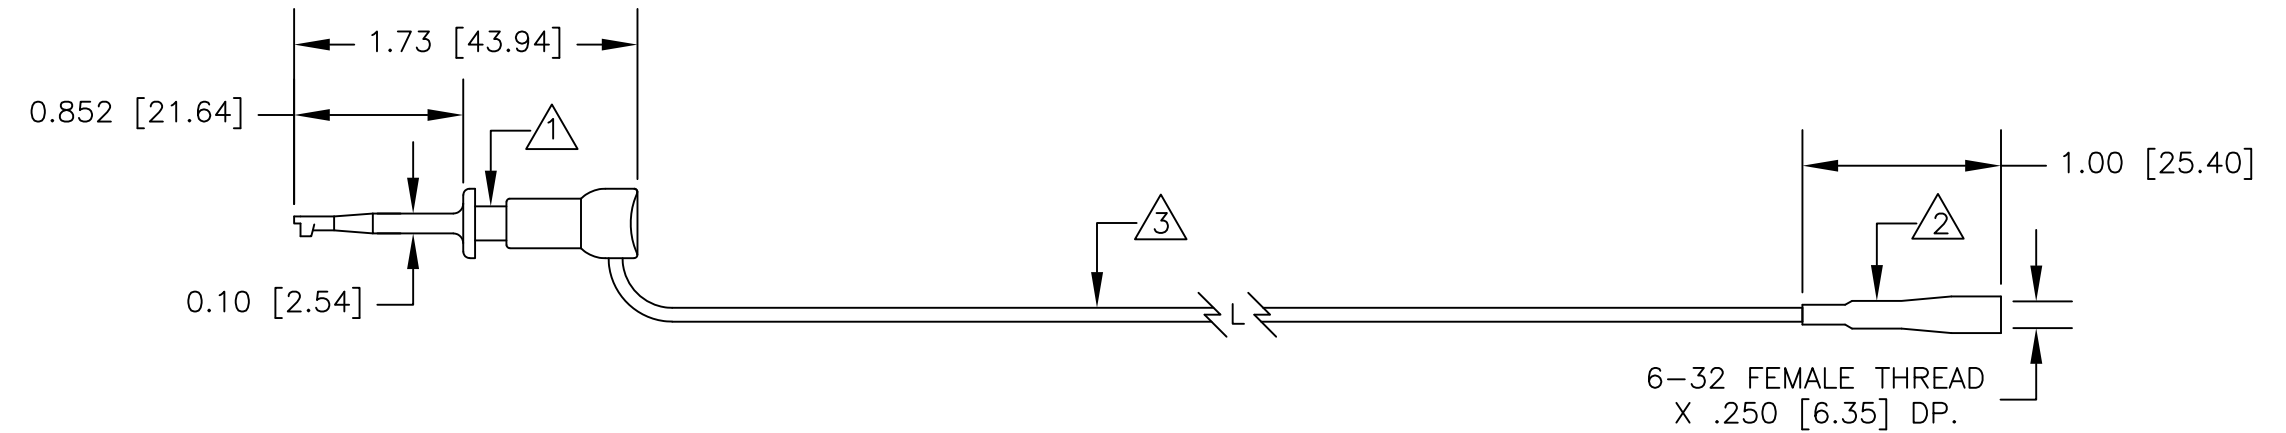

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			APPROVED BY			
		FINISH SEE NOTE.			DESCRIPTION	
					MICRO-HOOK (XM) TO FEMALE 6-32 THREAD (9212)	
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			<b>B</b>	<b>08505</b>	<b>212XM</b>	
APPLICATION		DO NOT SCALE DRAWING	SCALE	1:1	SHEET 1 OF 1	