NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR
   HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
   CONTACT BLADE: GOLD PLATED BeCu.
   SPRING: STAINLESS STEEL.

2. P/N: 9261COLOR
   HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
   FRAME: NICKEL PLATED BRASS.
   CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.

3. P/N: W–200/COLOR
   22AWG TINNED COPPER
   0.070 [1.78] O.D. PVC INSULATION
   AVAILABLE IN TEN COLORS.

4. PERFORMANCE
   MAXIMUM CURRENT: 2.5 AMPS
   MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
   HANDS FREE: 1000 W.V.D.C.
   MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

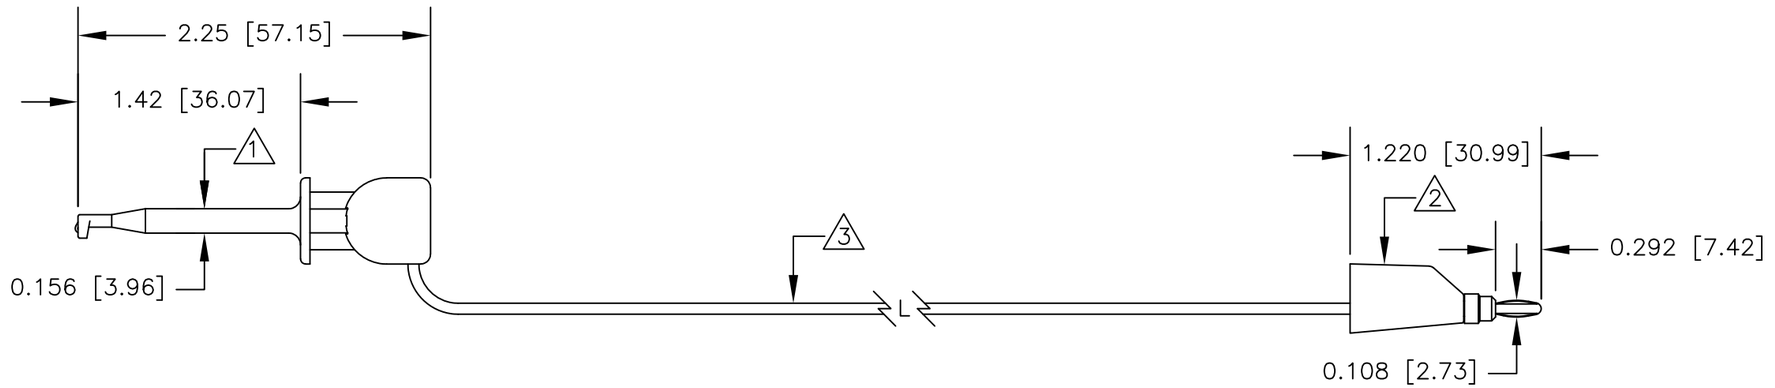

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.	E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE	
			DRAWN R.L.	5/13	DESCRIPTION: MINI–HOOK (X100W) TO STK MINI BAN PLUG (9261)
		MATERIAL: SEE NOTE.	APPROVED BY		
		FINISH: SEE NOTE.			SIZE: B | CODE IDENT NO.: 08505 | DRAWING NO.: 216W | REV.
NEXT ASSY	USED ON				SCALE: 1:1 | SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.