


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XKCOLOR  
HOUSING & PLUNGER: GLASS FILLED CELCON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: STAINLESS STEEL.  
SPRING: STAINLESS STEEL.
2. P/N: 9261COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: NICKEL PLATED BRASS.  
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-200/COLOR  
22AWG TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

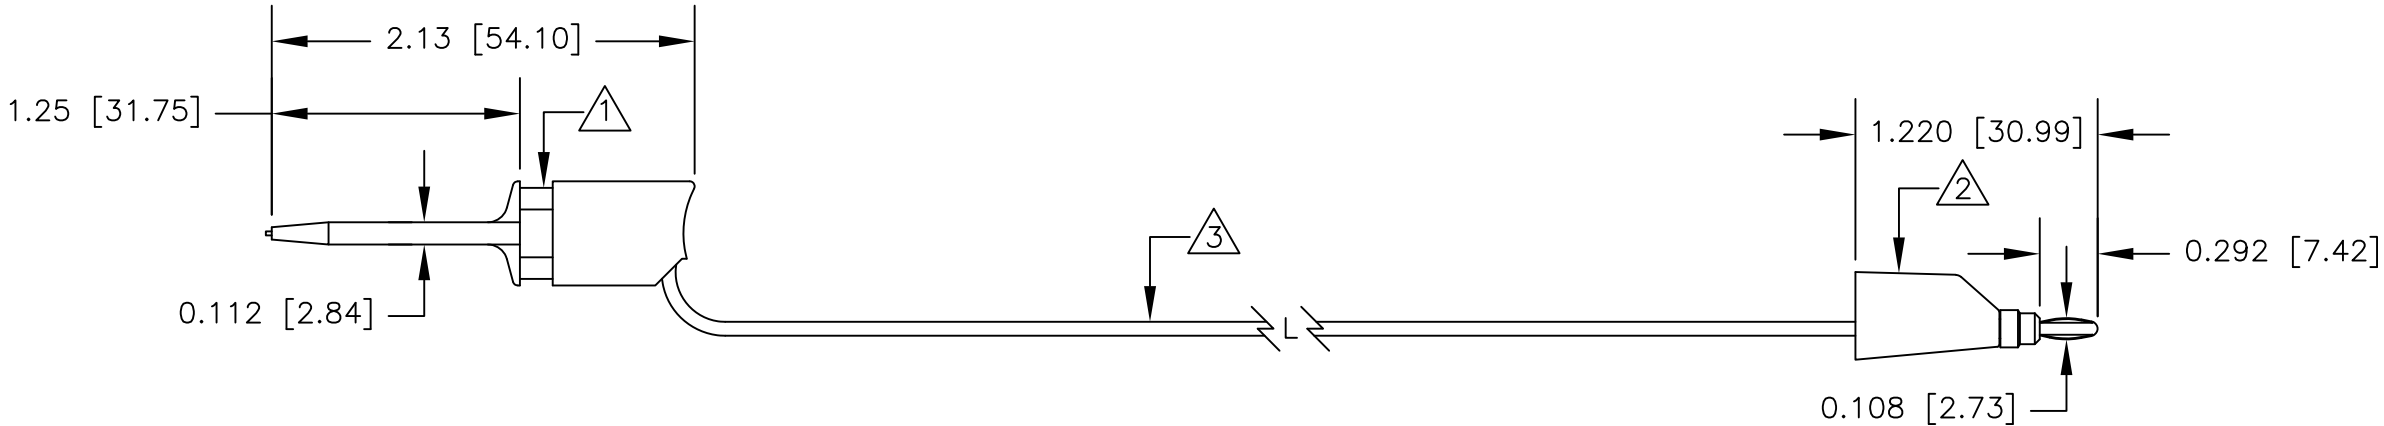

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS   DECIMALS   ANGLES  ±                    .XX ±                    ± .XXX ±	CONTRACT NO.		<div><b>E-Z-HOOK!</b></div> <div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div>				
				APPROVALS	DATE	DESCRIPTION  MICRO-HOOK (XK) TO STK MINI BAN PLUG (9261)			
				DRAWN	R.L.				
		MATERIAL SEE NOTE.	APPROVED BY						
		FINISH SEE NOTE.							
NEXT ASSY	USED ON					SIZE	CODE IDENT NO.	DRAWING NO.	REV.
						B	08505	216XK	
APPLICATION		DO NOT SCALE DRAWING				SCALE			
						1:1			SHEET 1 OF 1