NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XMCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.

2. P/N: X100WCOLOR

HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.

CONTACT BLADE: GOLD PLATED BeCu.

SPRING: STAINLESS STEEL.

3. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.


4. PERFORMANCE

MAXIMUM CURRENT: 2.5 AMPS

MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC

HANDS FREE: 1000 W.V.D.C.

MAXIMUM TEMPERATURE: 176°F (80°C)

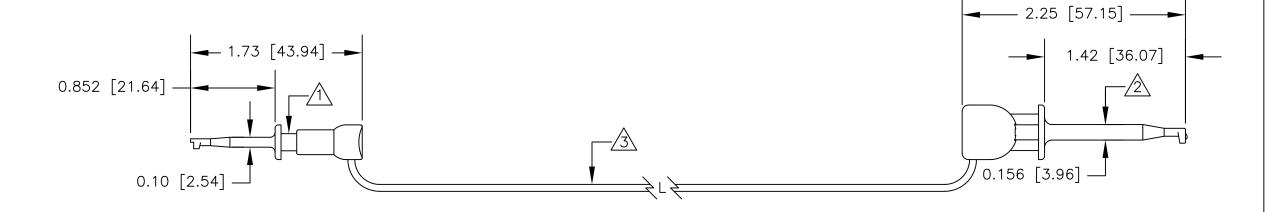

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.  APPROVALS DATE		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
Ī			± .XX ± ± .XXX ±	DRAWN R.L.		DESCRIPTION
			MATERIAL SEE NOTE.	APPROVED BY		MICRO-HOOK (XM) TO MINI-HOOK (X100W)
			FINISH			SIZE CODE IDENT NO. DRAWING NO. REV.
Ī	NEXT ASSY	USED ON	SEE NOTE.			B   <b>08505</b>   220W
	APPLICATION		DO NOT SCALE DRAWING	]		SCALE 1:1 SHEET 1 OF 1