REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XL1COLOR
   HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
   CONTACT BLADE: GOLD PLATED BeCu.
   SPRING: STAINLESS STEEL.

2. P/N: 9275COLOR
   INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
   ALLIGATOR: NICKEL PLATED STEEL.

3. P/N: W–200/COLOR
   22AWG TINNED COPPER
   0.070 [1.78] O.D. PVC INSULATION
   AVAILABLE IN TEN COLORS.

4. PERFORMANCE
   MAXIMUM CURRENT: 2.5 AMPS
   MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
   HANDS FREE: 1000 W.V.D.C.
   MAXIMUM TEMPERATURE: 176°F (80°C)

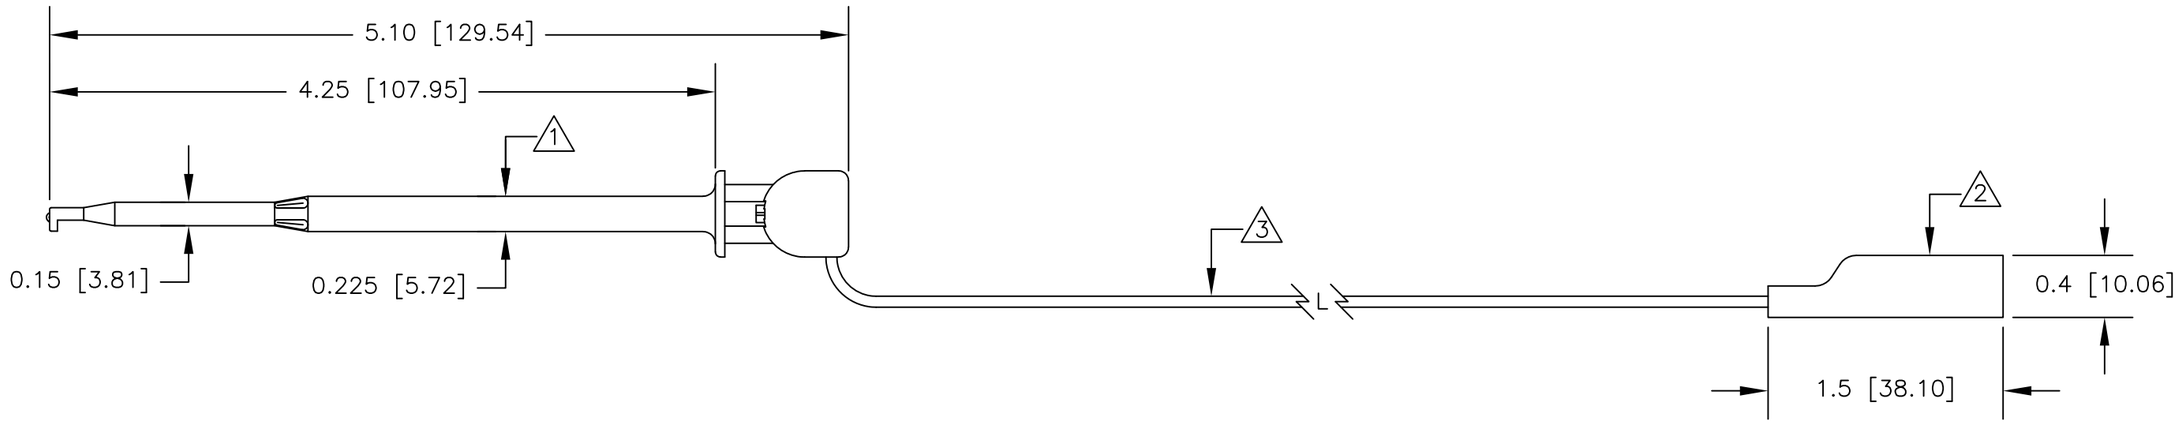

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±	CONTRACT NO.	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS / DRAWN R.L.	DATE 5/13
		MATERIAL SEE NOTE.	APPROVED BY	
		FINISH SEE NOTE.		
NEXT ASSY	USED ON			
APPLICATION		DO NOT SCALE DRAWING		

DESCRIPTION: MINI–HOOK (XL1) TO MINI ALLIGATOR CLIP (9275)

SIZE	CODE IDENT NO.	DRAWING NO.	REV.
B	08505	229XL1	

SCALE 1:1 SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.