


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR  
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
2. P/N: 9265-HS  
INSULATOR: HEAT SHRINK TUBING. BLACK.  
BODY & CONTACT : GOLD PLATED BRASS.
3. P/N: W-200/COLOR  
22AWG TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

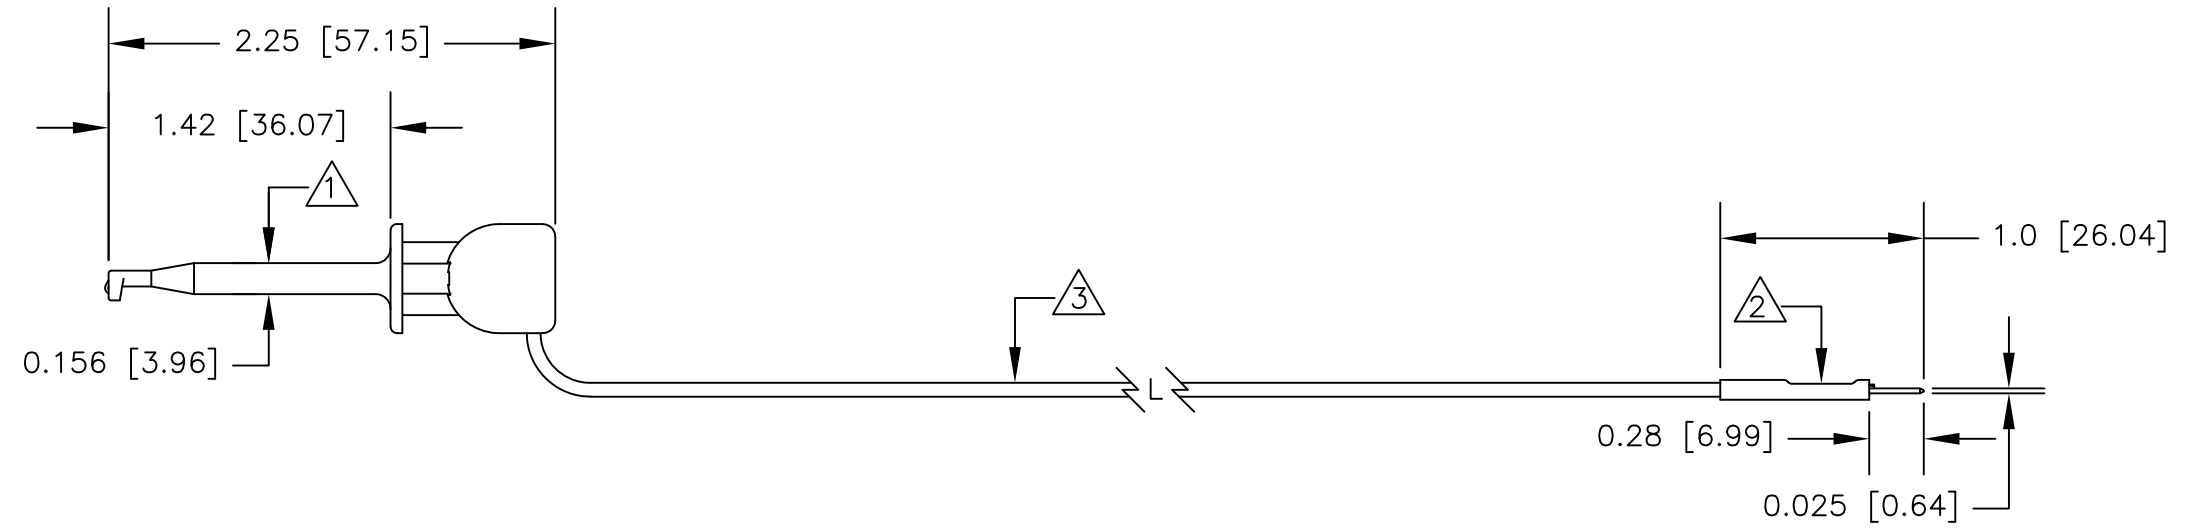

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			APPROVED BY			
		FINISH SEE NOTE.	DESCRIPTION		MINI-HOOK (X100W)	
			TO 0.025 [0.64] PIN PLUG (9265-HS)			
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			<b>B</b>	<b>08505</b>	<b>230W</b>	
APPLICATION		DO NOT SCALE DRAWING	SCALE		1:1	SHEET 1 OF 1