


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XELCOLOR
HOUSING & PLUNGER & SLIDE: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT NEEDLE & SPRING: STAINLESS STEEL.
BANANA SOCKET: BRASS
SET SCREW: ALLOY STEEL
2. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
3. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

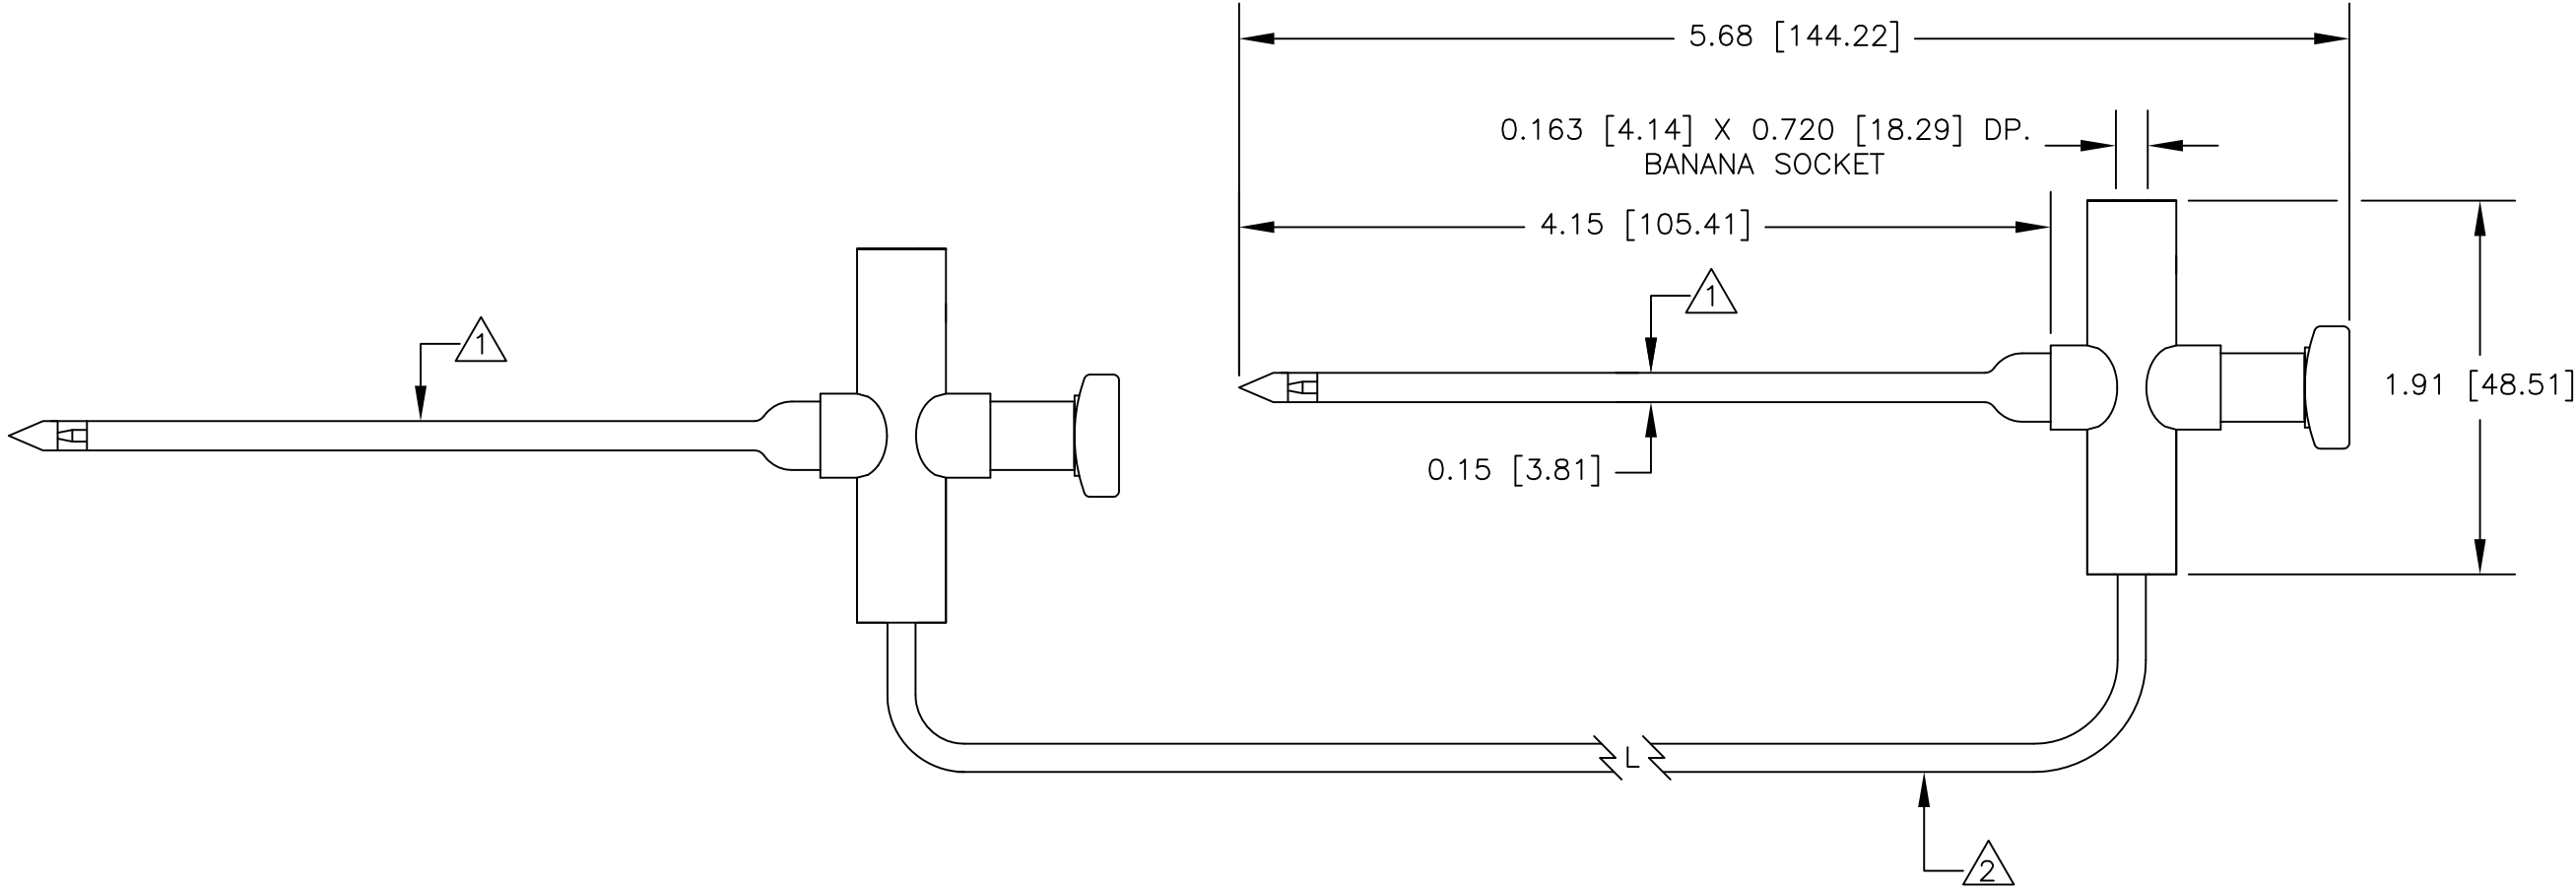

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div><div>E-Z-HOOK®</div><div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div></div>			
			APPROVALS	DATE	DESCRIPTION			
			DRAWN R.L	10/10				
		MATERIAL SEE NOTE.	APPROVED BY		INSULATION PIERCING MACRO-HOOK (XEL) JUMPER			
		FINISH SEE NOTE.			SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON				B	08505	604XEL	
APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1		SHEET 1 OF 1