


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XJLCOLOR
 HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 CONTACT BLADE: NICKEL SILVER ALLOY.
 SPRING & NEEDLE POINT: STAINLESS STEEL.
2. P/N: W-600/COLOR
 18AWG 65X36 TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
3. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

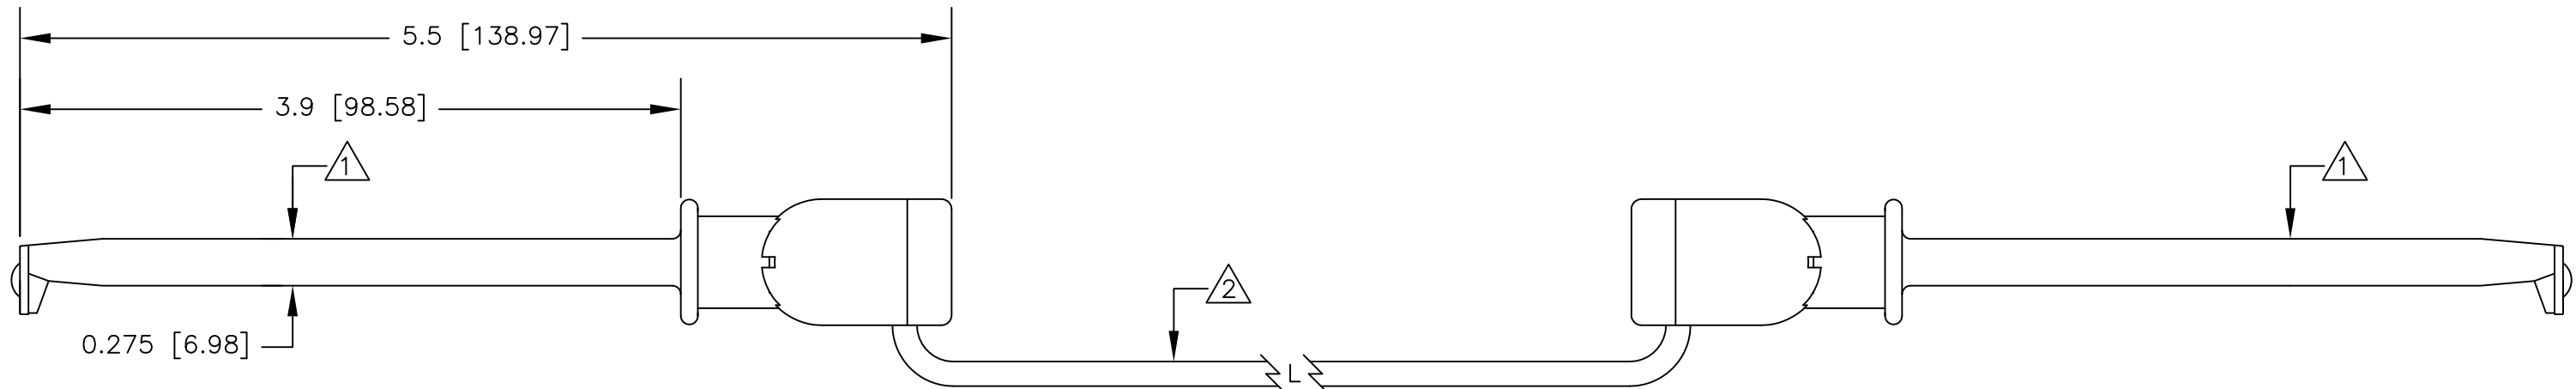

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			APPROVED BY			
NEXT ASSY	USED ON	FINISH SEE NOTE.			DESCRIPTION INSULATION PIERCING MACRO-HOOK (XJL) JUMPER	
APPLICATION		DO NOT SCALE DRAWING	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			B	08505	604XJL	
			SCALE	1:1	SHEET 1 OF 1	