

NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: X100WCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.

2. P/N: 9206COLOR
HOUSING: MOLDED PHENOLIC PLASTIC. AVAILABLE IN BLACK AND RED.
FRAME: NICKEL PLATED BRASS.
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
HARDWARE: STAINLESS STEEL NUT AND SCREW.

3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

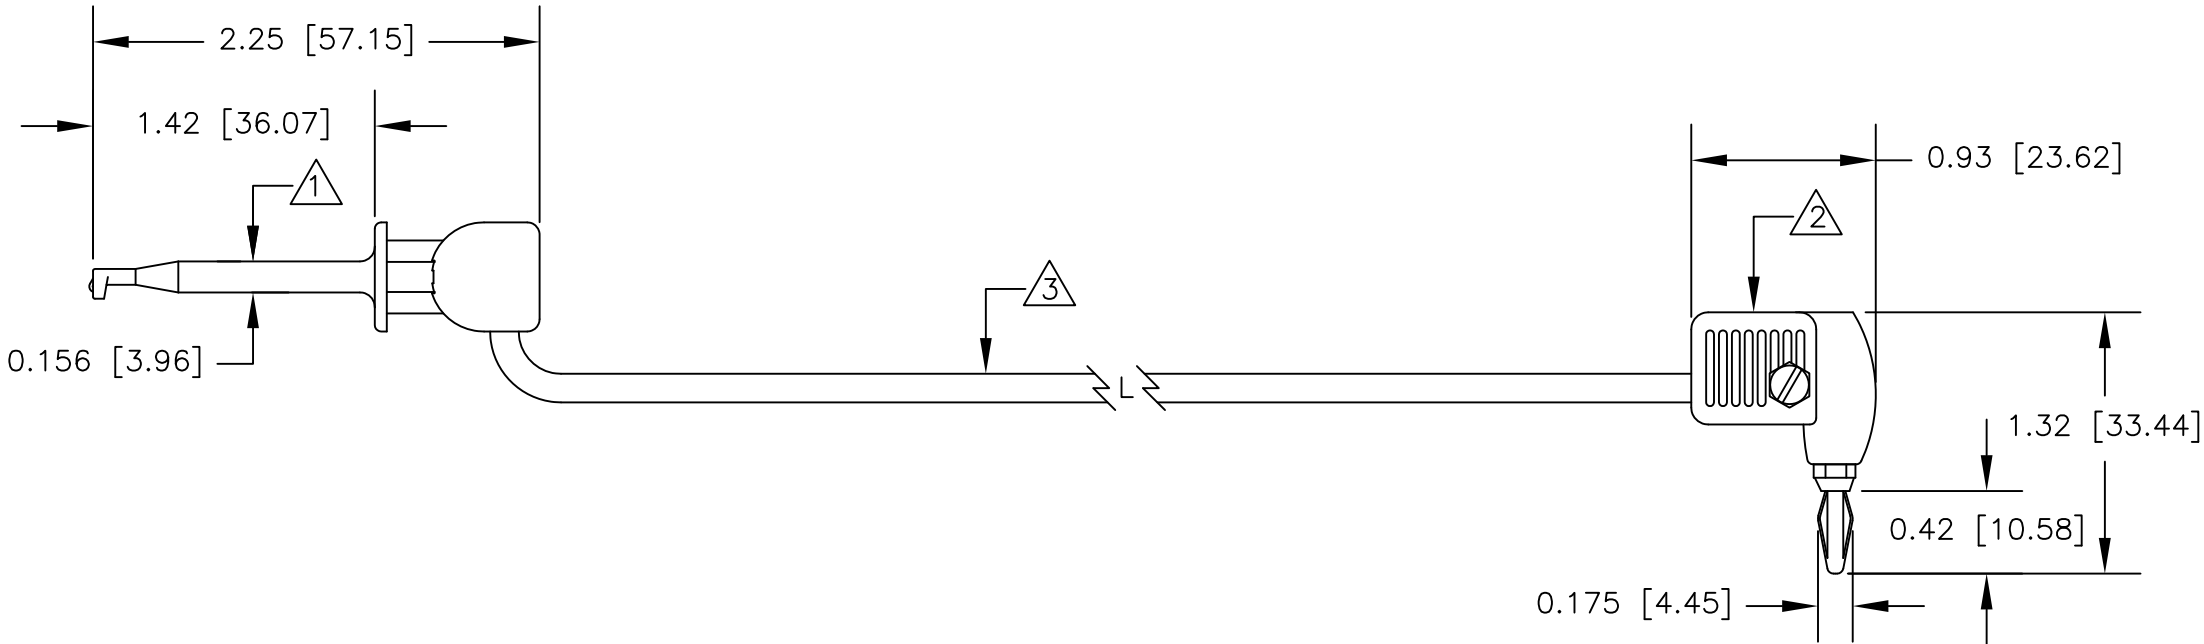

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div>E-Z-HOOK®</div> <div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div>						
			APPROVALS	DATE							
				DRAWN	R.L.	5/13	DESCRIPTION MINI-HOOK (X100W) TO METER BAN PLUG (9206)				
		MATERIAL SEE NOTE.	APPROVED BY								
		FINISH SEE NOTE.					SIZE	CODE IDENT NO.	DRAWING NO.	REV.	
NEXT ASSY	USED ON						B	08505	605W		
APPLICATION		DO NOT SCALE DRAWING					SCALE		1:1	SHEET 1 OF 1	