


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XJLCOLOR  
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: NICKEL SILVER ALLOY.  
SPRING & NEEDLE POINT: STAINLESS STEEL.
2. P/N: 9206COLOR  
HOUSING: MOLDED PHENOLIC PLASTIC. AVAILABLE IN BLACK AND RED.  
FRAME: NICKEL PLATED BRASS.  
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.  
HARDWARE: STAINLESS STEEL NUT AND SCREW.
3. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

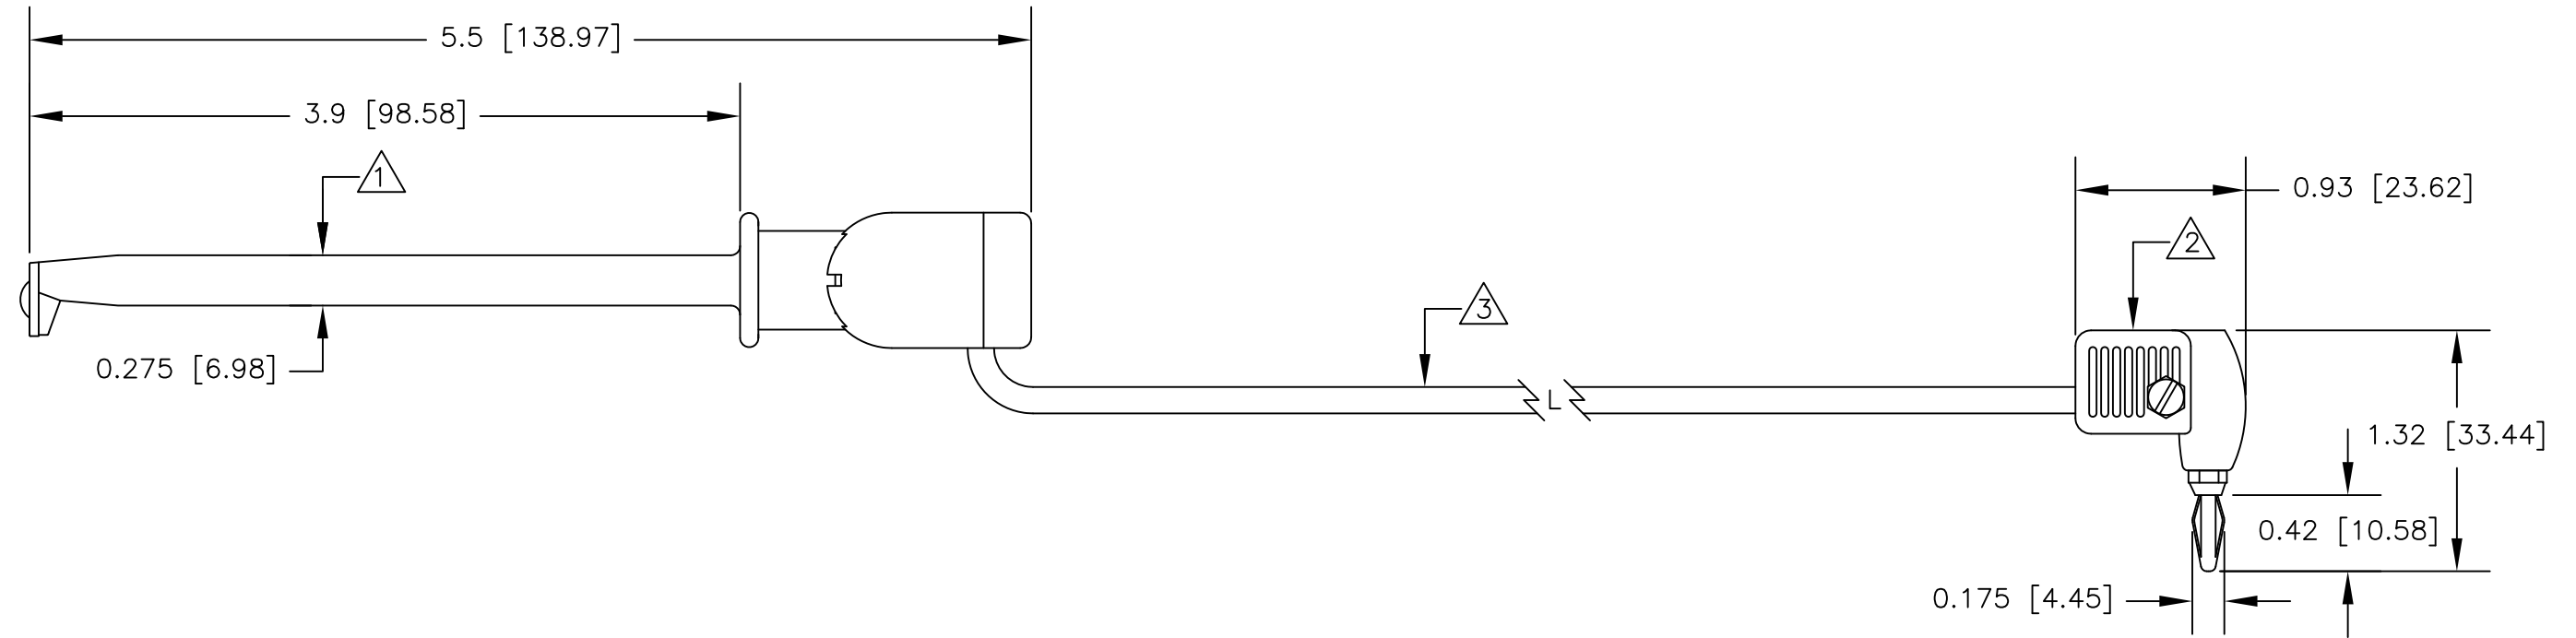

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			APPROVED BY			
		FINISH SEE NOTE.	DESCRIPTION		INSULATION PIERCING MACRO-HOOK (XJL) TO METER BAN PLUG (9260)	
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.		DRAWING NO.
APPLICATION		DO NOT SCALE DRAWING	B	08505	605XJL	
			SCALE	1:1	SHEET 1 OF 1	