


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XJLCOLOR  
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: NICKEL SILVER ALLOY.  
SPRING & NEEDLE POINT: STAINLESS STEEL.
2. P/N: 9207COLOR  
HOUSING: MOLDED PHENOLIC PLASTIC. AVAILABLE IN BLACK AND RED.  
FRAME: NICKEL PLATED BRASS.  
HARDWARE: STAINLESS STEEL NUT AND SCREW.
3. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

4. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

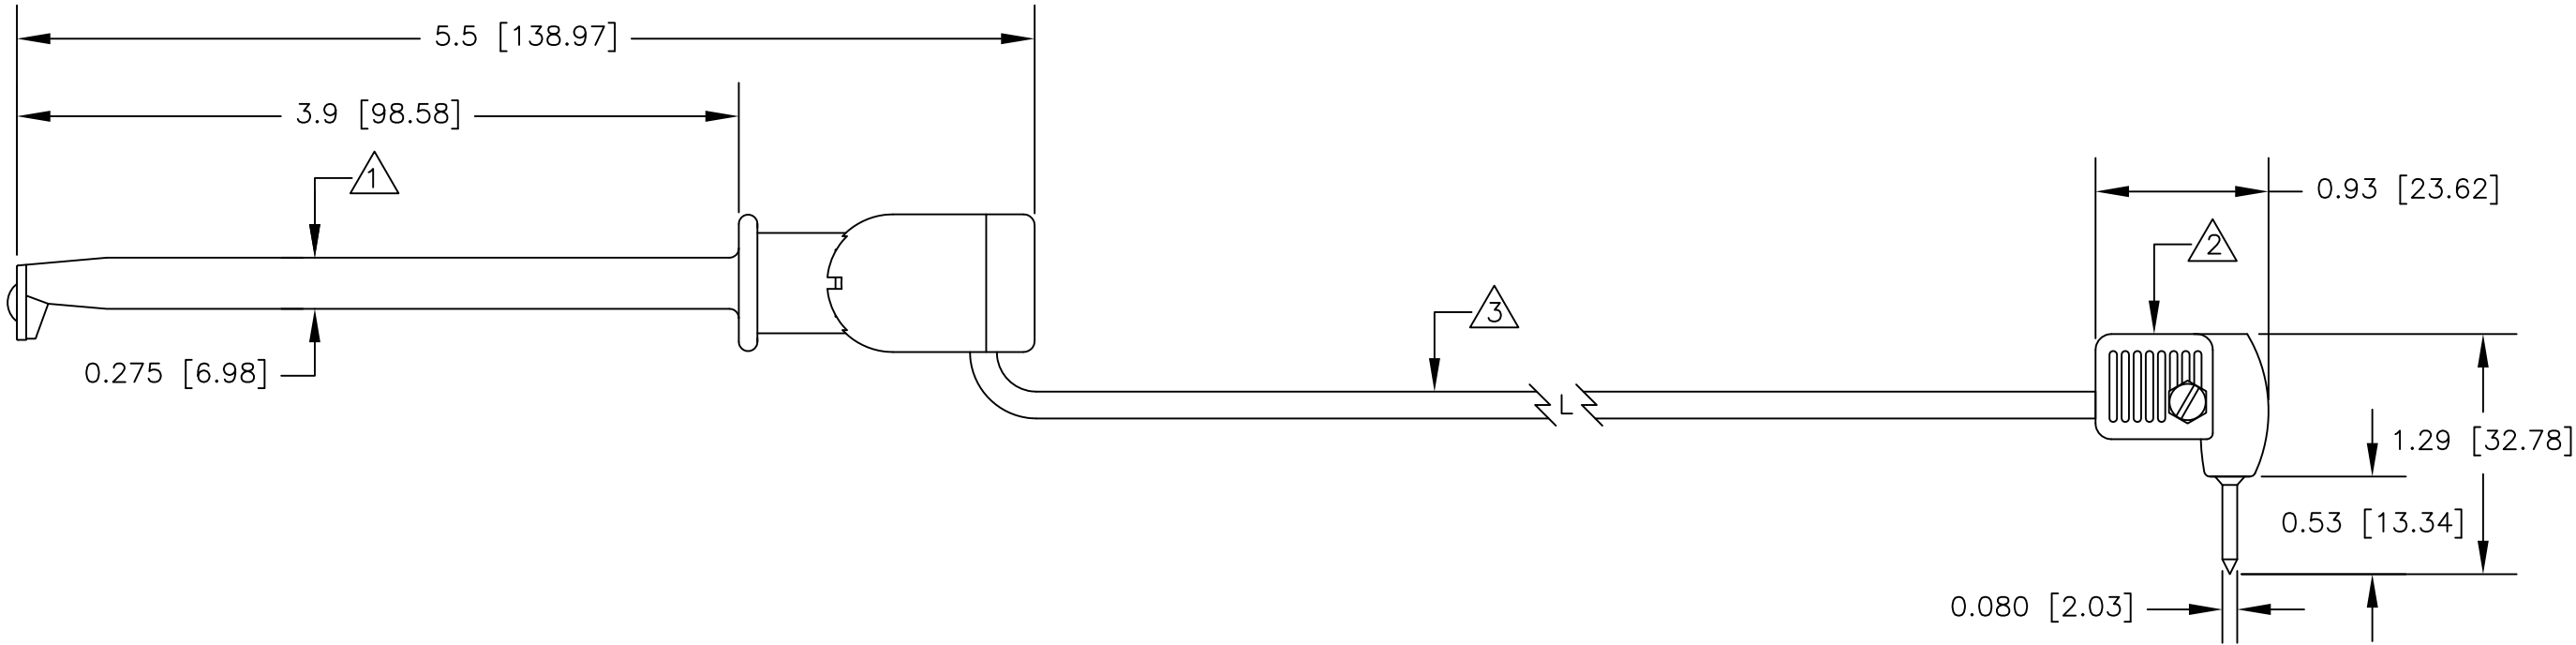

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div><div>E-Z-HOOK®</div><div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div></div>			
			APPROVALS	DATE				
			DRAWN R.L.	5/13				
		MATERIAL SEE NOTE.	APPROVED BY		DESCRIPTION INSULATION PIERCING MACRO-HOOK (XJL) TO METER PIN PLUG (9207)			
		FINISH SEE NOTE.			SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON				B	08505	606XJL	
APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1		SHEET 1 OF 1